

# BAWT - Build Automation With Tcl

<b>1</b>	<b>INTRODUCTION .....</b>	<b>3</b>
<b>2</b>	<b>INSTALLATION AND USAGE EXAMPLES .....</b>	<b>4</b>
2.1	Installation on Windows .....	4
2.2	Installation on Linux.....	5
2.3	Installation on Darwin .....	7
2.4	Use of Batch Scripts .....	7
<b>3</b>	<b>DIRECTORY AND FILE STRUCTURE.....</b>	<b>10</b>
3.1	Directory Structure.....	10
3.1.1	<i>Structure of the input directories .....</i>	<i>10</i>
3.1.2	<i>Structure of the output directories .....</i>	<i>11</i>
3.1.3	<i>Directory access .....</i>	<i>11</i>
3.2	Setup Files .....	12
3.3	Build Files.....	21
3.3.1	<i>User supplied build files .....</i>	<i>22</i>
3.3.2	<i>User configurable build files .....</i>	<i>23</i>
<b>4</b>	<b>BUILD STAGES .....</b>	<b>26</b>
4.1	Stage Bootstrap.....	26
4.2	Stage Setup.....	27
4.3	Stage Clean.....	28
4.4	Stage Extract.....	29
4.5	Stage Configure .....	29
4.6	Stage Compile.....	30
4.7	Stage Distribute.....	31
4.8	Stage Finalize.....	32
<b>5</b>	<b>BUILD PROCESS .....</b>	<b>34</b>
5.1	User Perspective .....	34
5.1.1	<i>Use Case: Cosmetic change of Build file CMake.bawt .....</i>	<i>34</i>
5.1.2	<i>Compiler selection on Windows .....</i>	<i>37</i>
5.1.3	<i>Online updates of libraries .....</i>	<i>39</i>
5.1.4	<i>Use the generated libraries.....</i>	<i>39</i>
5.1.5	<i>Change icons of executables.....</i>	<i>42</i>
5.1.6	<i>Parallel builds .....</i>	<i>42</i>
5.2	Developer Perspective.....	43
5.2.1	<i>Upgrade a library.....</i>	<i>43</i>
5.2.2	<i>Add a library.....</i>	<i>43</i>
5.2.3	<i>Add a Tcl program.....</i>	<i>44</i>
5.2.4	<i>Manually compile a library .....</i>	<i>45</i>
5.3	Known issues .....	46
5.3.1	<i>Build deadlock .....</i>	<i>46</i>
5.3.2	<i>BawtLogViewer shows incorrect build time .....</i>	<i>47</i>
5.3.3	<i>Package SWIG.....</i>	<i>47</i>
5.3.4	<i>Package Trf.....</i>	<i>47</i>
5.3.5	<i>Package tcllib/crc32.....</i>	<i>47</i>
5.4	Tips and Tricks .....	47
5.4.1	<i>Tips for Windows .....</i>	<i>47</i>
5.4.2	<i>Tips for Linux.....</i>	<i>48</i>

5.5	Advanced Batch Scripts.....	48
5.5.1	<i>Build Tcl-Pure distributions</i> .....	48
5.5.2	<i>Build Tcl-BI distributions</i> .....	50
<b>6</b>	<b>LOGGING.....</b>	<b>53</b>
6.1	Graphical Log Viewer .....	53
<b>7</b>	<b>COMMAND LINE OPTIONS.....</b>	<b>57</b>
7.1	General Options .....	57
7.2	List Action Options.....	57
7.3	Build Action Options .....	57
7.4	Build Configuration Options .....	58
<b>8</b>	<b>SUPPORTED LIBRARIES .....</b>	<b>60</b>
<b>9</b>	<b>MSYS / MINGW INFORMATION .....</b>	<b>69</b>
9.1	Introduction.....	69
9.1.1	<i>MSYS</i> .....	69
9.1.2	<i>MSYS2</i> .....	69
9.1.3	<i>MinGW</i> .....	69
9.2	Installation .....	70
9.2.1	<i>Download MSYS</i> .....	70
9.2.2	<i>Download MinGW</i> .....	70
9.2.3	<i>Extract</i> .....	72
9.2.4	<i>Configuration</i> .....	72
9.2.5	<i>Test</i> .....	72
9.3	Further Informations .....	72
9.3.1	<i>What is MSYS</i> .....	72
9.3.2	<i>Where to get MSYS</i> .....	73
9.3.3	<i>How to use MSYS</i> .....	73
<b>10</b>	<b>RELEASE HISTORY .....</b>	<b>74</b>

# 1 Introduction

**BAWT** is a configurable framework written in **Tcl** for building **C/C++** based software libraries from source code without user interaction. Its main usage is for the **Windows** operating system, where heterogeneous build environments and compilers are needed (or wanted) to build these libraries:


- `configure/make` (via `MSYS / MinGW`)
- `nmake`
- `CMake`
- `Visual Studio Solutions`
  
- `gcc` (via `MSYS / MinGW`)
- `Visual Studio`

Due to the portable nature of **Tcl** the framework can be used on **Linux** and **Darwin** as well using the `configure/make/gcc` build chain.

The libraries currently supported by **BAWT** are mainly from the **Tcl** and **OpenSceneGraph** domain. For these two domains the framework supports creating installation executables on Windows based on **InnoSetup** and simple shell-based installation programs for Linux and Darwin.

See chapter [8 Supported Libraries](#) for a list of currently supported libraries.

The framework itself is just one plain Tcl file `Bawt.tcl`, which reads a `Setup` file containing all the libraries to be built. Each library must have an accompanying `Build` file, which contains the details on how to extract, configure, compile and distribute the library. The library itself is stored as one or more zipped source code files, which may contain different versions of the library. The generated shared or static libraries, programs and header files are finally copied into ready-to-use directory structures for use by developers or for software distribution.

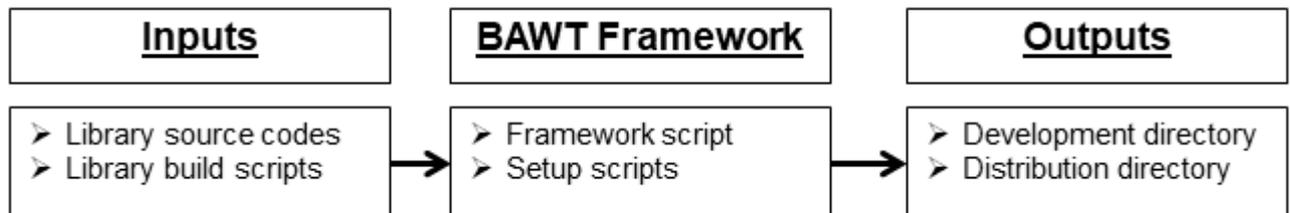


The **BAWT** framework (including `Bootstrap` and `Setup` files) as well as the needed `MSYS/MinGW` files (if running on Windows) must be downloaded manually. You do not need to have `Tcl` installed to execute the framework. **BAWT** comes with `Tclkits` (single-file `Tcl` interpreter) for Windows, Linux and Darwin. The library `Build` and source files can be downloaded automatically on demand.

The **BAWT** homepage is at <https://www.tcl3d.org/bawt>.

**BAWT** is copyrighted by Paul Obermeier and distributed under the [3-clause BSD license](#).

## 2 Installation and Usage Examples

This chapter explains the installation of the **BAWT** framework and gives first simple use cases. **BAWT** related downloads are available at <https://www.tcl3d.org/bawt/download.html>.

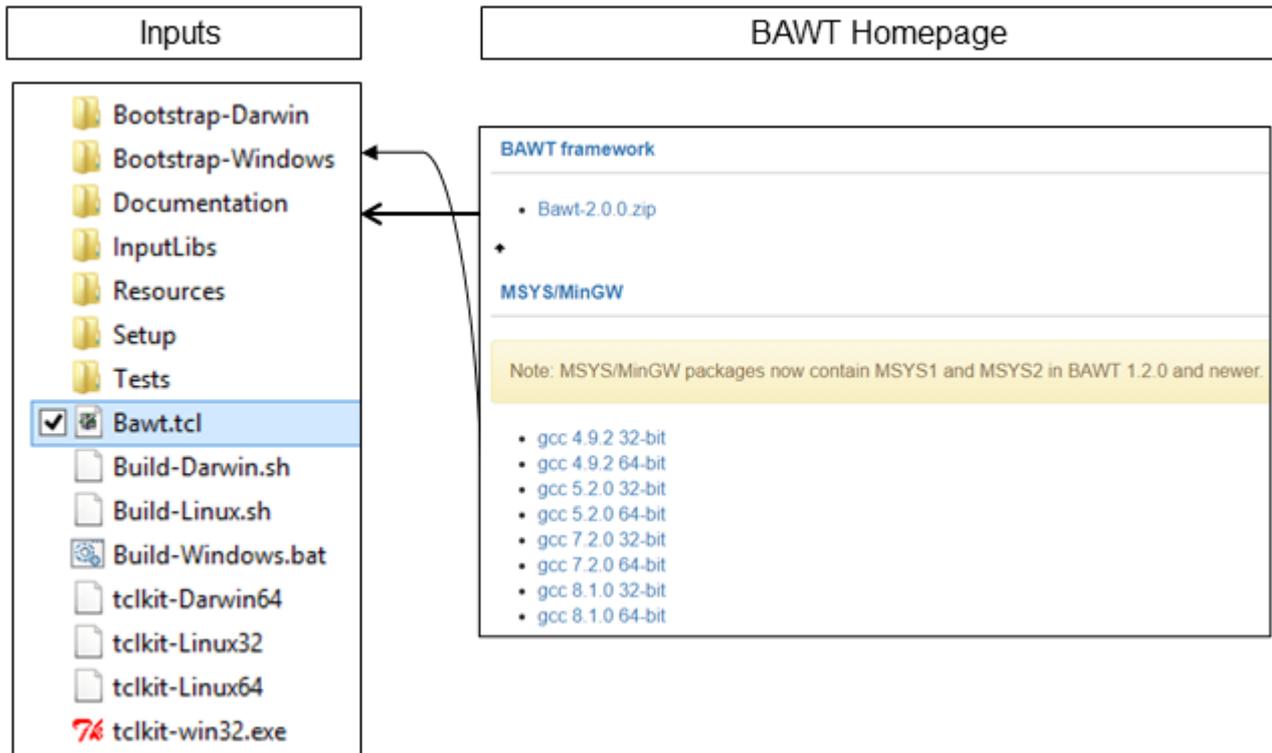

### 2.1 Installation on Windows

#### Prerequisites:

- None for building libraries supporting MSYS / MinGW.
- Otherwise, Visual Studio (Express, Community or Professional).
  - Visual Studio Versions 2008, 2010, 2013, 2015, 2017, 2019 and 2022 are currently supported.
  - If Visual Studio is not installed in the standard location, you have to use procedure *SetVcvarsProg* with the absolute path to batch script *vcvarsall.bat*.

#### Downloads:

- **BAWT** framework *Bawt-2.3.1.zip*
- MSYS / MinGW distribution file(s), ex. *gcc7.2.0\_x86\_64-w64-mingw32.7z*

#### Installation:

- Extract **BAWT** framework *Bawt-2.3.1.zip* in a directory of choice, ex. *C:\Bawt*
- Copy MSYS / MinGW distribution file(s) into *C:\Bawt\Bawt-2.3.1\Bootstrap-Windows*
- Open command shell window and go into directory *C:\Bawt\Bawt-2.3.1*

#### Usage examples:

- Create basic Tcl packages for 32-bit (using only MSYS / MinGW):
 

```
> Build-Windows.bat x86 gcc Setup\Tcl_Basic.bawt update
```
- Create basic Tcl packages for 64-bit (using only MSYS / MinGW):

```
> Build-Windows.bat x64 gcc Setup\Tcl_Basic.bawt update
```

- Create extended Tcl packages including InnoSetup installation executable for 64-bit (using Visual Studio 2019 to build Tcl packages supporting Visual Studio like *Mpexpr* and *tkdnd*):

```
> Build-Windows.bat x64 vs2019+gcc Setup\Tcl_Distribution.bawt update
```

## 2.2 Installation on Linux

### Prerequisites:

- Required: C/C++ development package, *curl*, *p7zip*
- Optional: Dependent on the libraries. See below for distribution specific examples.

### Downloads:

- **BAWT** framework *Bawt-2.3.1.zip*

### Installation:

- Extract **BAWT** framework *Bawt-2.3.1.zip* in a directory of choice, ex. */opt/Bawt*
- Open shell (Terminal window), go into created directory */opt/Bawt Bawt-2.3.1* and execute:

```
> chmod u+x Build*.sh
```

```
> chmod u+x tclkit*
```

### Usage examples:

- Create basic Tcl packages for 32-bit:
 

```
> ./Build-Linux.sh x86 Setup/Tcl_Basic.bawt update
```
- Create extended Tcl packages including simple shell-based installation script for 64-bit:
 

```
> ./Build-Linux.sh x64 Setup/Tcl_Distribution.bawt update
```

### Distribution specific prerequisites:

See chapter [3.2 Setup Files](#) for a list of available Setup files and the dependencies between Setup files. If you want to build ex. *Tcl\_Extended.bawt*, you must not only install the prerequisites of this Setup file, but also the prerequisites of the dependent Setup file *Tcl\_Basic.bawt*.

#### Debian 11.6 Bullseye (gcc 10.2.1)

- Install default Debian 11.6 desktop distribution (ex. *debian-11.6.0-amd64-DVD-1.iso*)
- Use *Synaptic* to install further packages:

Setup file	Debian package	Needed by library
All	build-essential	All C/C++ based libraries.
	curl	BAWT framework.
	p7zip	
Tcl_Basic.bawt	libx11-dev	Tk
	libcairo2-dev	tkpath
	libglx-dev	Canvas
	libglu1-mesa-dev	
	libasound2-dev	Snack
Tcl_Extended.bawt	libxrandr-dev	tcl3dBasic
	libpython3.9-dev	tclpy

	python3-numpy	
	libxcursor-dev	tkdnd
<i>Tcl3D.bawt</i>	libxi-dev	glfw
	libxinerama-dev	
<i>OSG_Extended.bawt</i>	freeglut3-dev	Cal3D
<i>MiscLibs.bawt</i>	bison	CERTI
	flex	

*Ubuntu 22.04 (gcc 11.3.0)*

- Install default Ubuntu 22.04 desktop distribution (ex. *ubuntu-22.04.1-desktop-amd64.iso*)
- Use Synaptic to install further packages:

Setup file	Ubuntu package	Needed by library
<i>All</i>	build-essential	All C/C++ based libraries.
	curl	BAWT framework.
	p7zip	
<i>Tcl_Basic.bawt</i>	libx11-dev	Tk
	libcairo2-dev	tkpath
	libglx-dev	Canvas
	libglu1-mesa-dev	
	libasound2-dev	Snack
<i>Tcl_Extended.bawt</i>	libxrandr-dev	tcl3dBasic
	libpython3.10-dev	tclpy
	python3-numpy	
	libxcursor-dev	tkdnd
<i>Tcl3D.bawt</i>	libxi-dev	glfw
	libxinerama-dev	
<i>OSG_Extended.bawt</i>	freeglut3-dev	Cal3D

*SUSE 15.4 (gcc 7.5.0)*

- Install default SUSE 15.4 desktop distribution (ex. *openSUSE-Leap-15.4-CR-DVD-x86\_64-Build31.38-Media.iso*)
- Use Yast to install further packages:

Setup file	SUSE schema	Needed by library
<i>All</i>	General development	All C/C++ based libraries.
	C++ development	
Setup file	SUSE package	Needed by library
<i>Tcl_Basic.bawt</i>	libx11-devel	Tk
	cairo-devel	tkpath
	alsa-devel	Snack
<i>Tcl_Extended.bawt</i>	glu-devel	tcl3dBasic
	libxrandr-devel	

	python3-devel	tclpy
	python3-numpy	
	libxcursor-devel	
Tcl3D.bawt	libxi-devel	glfw
	libxinerama-devel	
OSG_Extended.bawt	freeglut3-devel	Cal3D

## 2.3 Installation on Darwin

### Prerequisites:

- XCode
- curl (should be available by default on Darwin)

### Downloads:

- **BAWT** framework *Bawt-2.3.1.zip*

### Installation:

- Extract **BAWT** framework *Bawt-2.3.1.zip* in a directory of choice, ex. */opt/Bawt*
- Open shell (Terminal window), go into created directory */opt/Bawt Bawt-2.3.1* and execute:
 

```
> chmod u+x Build*.sh
> chmod u+x tclkit*
```

### Usage examples:

Note, that Darwin does not support 32-bit programs.

Replace *Build-Darwin.sh* with *Build-Darwin-arm64.sh* when using an ARM based system.

- Create basic Tcl packages for 64-bit:
 

```
> ./Build-Darwin.sh Setup/Tcl_Basic.bawt update
```
- Create extended Tcl packages including simple shell-based installation script for 64-bit:
 

```
> ./Build-Darwin.sh Setup/Tcl_Distribution.bawt update
```

## 2.4 Use of Batch Scripts

As the **BAWT** framework is generic and has lots of command line options (see chapter [7 Command Line Options](#)), a batch or shell script for each supported platform is included in the distribution for ease of usage in the most common use cases:

- *Build-Windows.bat*
- *Build-Linux.sh*
- *Build-Darwin.sh*

These batch scripts have been used in the examples of the previous chapters and may serve as starting point for your own batch scripts suited exactly to your needs.

Batch script <i>Build-Windows.bat</i>
<pre>@echo off setlocal  rem Default values for some often used options.</pre>

```

set OUTROOTDIR=./BawtBuild
set TCLKIT=tclkit-win32.exe
set NUMJOBS=%NUMBER_OF_PROCESSORS%

rem First 4 parameters are mandatory.
if "%1" == "" goto ERROR
if "%2" == "" goto ERROR
if "%3" == "" goto ERROR
if "%4" == "" goto ERROR

set ARCH=%1
set COMPILER=%2
set SETUPFILE=%3
set ACTION=%4
shift
shift
shift
shift

rem If no target is given, use target "all".
if "%1"==" " goto BUILDALL

rem Loop through the rest of the parameter list for targets.
set TARGETS=
:PARAMLOOP
rem There is a trailing space in the next line. It's there for formatting.
set TARGETS=%TARGETS%1
shift
if not "%1"==" " goto PARAMLOOP
goto BUILD

:BUILDALL
if "%ACTION%"=="clean" goto WARNING
if "%ACTION%"=="complete" goto WARNING

set TARGETS=all

:BUILD

set ACTION=--%ACTION%
set BAWTOPTS=--rootdir %OUTROOTDIR% ^
             --architecture %ARCH% ^
             --compiler %COMPILER% ^
             --numjobs %NUMJOBS% ^
             --logviewer

rem Build all libraries as listed in Setup file.
CALL %TCLKIT% Bawt.tcl %BAWTOPTS% %ACTION% %SETUPFILE% %TARGETS%

goto EOF

:WARNING
echo Warning: This may clean or rebuild everything.
echo Use "clean all" or "complete all" to allow this operation.

:ERROR
echo.
echo Usage: %0 Architecture Compiler SetupFile Action [Target1] [TargetN]
echo Architecture      : x86 x64
echo Compiler          : gcc vs2008 vs2010 vs2013 vs2015 vs2017 vs2019 vs2022
echo                   gcc+vs20XX vs20XX+gcc
echo Actions           : clean extract configure compile distribute finalize
echo                   list complete update simulate touch
echo Default target    : all
echo Output directory: %OUTROOTDIR%

```

```
echo .
```

```
:EOF
```

See also chapter [5.5 Advanced Batch Scripts](#) for examples of more complex batch scripts.


## 3 Directory and File Structure

This chapter explains the directory structure of the input and output files as well as the contents and structure of the *Setup* and *Build* files.

### 3.1 Directory Structure

#### 3.1.1 Structure of the input directories

If **BAWT** was downloaded and installed according to the instructions in chapter 2 *Installation and Usage*, the following directory structure should exist.

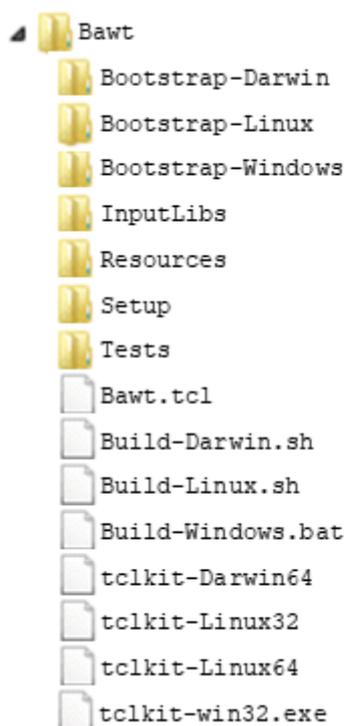

The *Bootstrap* directories contain zipped versions of the 7-zip program for Windows and Darwin and zipped versions of the zip program for Windows and Linux.

In directory *Bootstrap-Windows* there should be at least one version of the MSYS/MinGW distributions, which you must have downloaded manually.


Directory *InputLibs* contains the zipped source code versions of the libraries and the associated *Build* files, see chapter 3.3 *Build Files* for a detailed description of *Build* files. Note, that this directory is empty after a fresh installation of **BAWT**, because the corresponding files are downloaded on demand at the first start of a **BAWT** build by default. See chapter 5 *Build Process* on how to avoid automatic downloads and updates.

The *Setup* files (see chapter 3.2 *Setup Files*) supplied with **BAWT** are located in directory *Setup*.

Directory *Tests* contains several simple test scripts for checking correct compilation and installation of Tcl related packages.

For each supported platform there is also a Tclkit executable supplied, which is needed to run the **BAWT** framework, if no Tcl interpreter is available on your machine (Bootstrapping). A Tclkit is a single-file Tcl interpreter executable.

### 3.1.2 Structure of the output directories

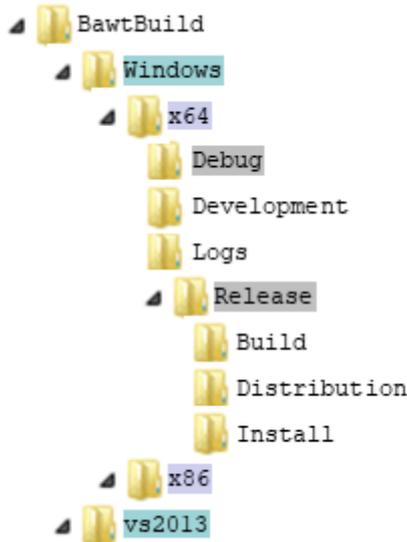

The root directory of the output files of a **BAWT** build (*BawtBuild* in the above example) can be specified with command line option `--rootdir`. In a *Build* script this directory can be queried with Tcl procedure *GetOutputRootDir*.

Beneath the root build directory there can be several directories named according to the build environment used: *Windows*, *Linux*, *Darwin* for builds with *gcc* or *vs2008*, *vs2010*, *vs2013*, *vs2015*, *vs2017*, *vs2019* or *vs2022*, if a Visual Studio version was used for building.

Beneath these environment specific directories two directory names can appear, depending on the build architecture: *x86* for 32-bit or *x64* for 64-bit builds.

In these architecture specific directories 3 to 4 subdirectories are contained.

The *Logs* directory contains the overall build log file *\_BawtBuild.log* as well as the library specific build log files. See chapter [6 Logging](#) for an in-depth explanation of **BAWT** logging functionality.

The *Development* directory contains all the files needed for a developer using the built libraries. Depending on the specified build types, directories called *Release* and *Debug* will be created. These directories contain the *Build* and *Install* subdirectories, where the actual sources are extracted and built as well as a *Distribution* subdirectory, which will contain all files needed for a software distribution of the compiled libraries.

The *Distribution* and *Development* directories contain mostly identical content. The *Development* directory typically contains additional library include files and import files (*\*.lib*). It is the task of the library specific *Build* file to copy the needed files into the *Distribution* and *Development* directories.

### 3.1.3 Directory access

The next figure shows the input and output directory hierarchy together with the procedures which can be used to get the path to the corresponding directory. The first procedure column (grey boxes) shows the names used in BAWT versions prior to 1.0, the second column (green boxes) shows the names as used by BAWT 1.0 and newer.

The last column shows the available command line options to change the location of a specific input or output directory.



The library search paths, which can be obtained with procedure `GetInputLibsDirs` are set at BAWT start-up to the following values:

- `file join [GetInputRootDir] "InputLibs"`
- `file join [pwd] "InputLibs"`


This list can be extended by using command line option `--libdir`.

If command line option `--nosubdirs` is specified, procedures `GetOutputArchDir` and `GetOutputRootDir` return the same directory path.

See chapter 4 *Build Stages* for an in-depth tour through the directory structure of **BAWT** in conjunction with the different build stages.

## 3.2 Setup Files

The following figure shows all available *Setup* files and their dependencies.

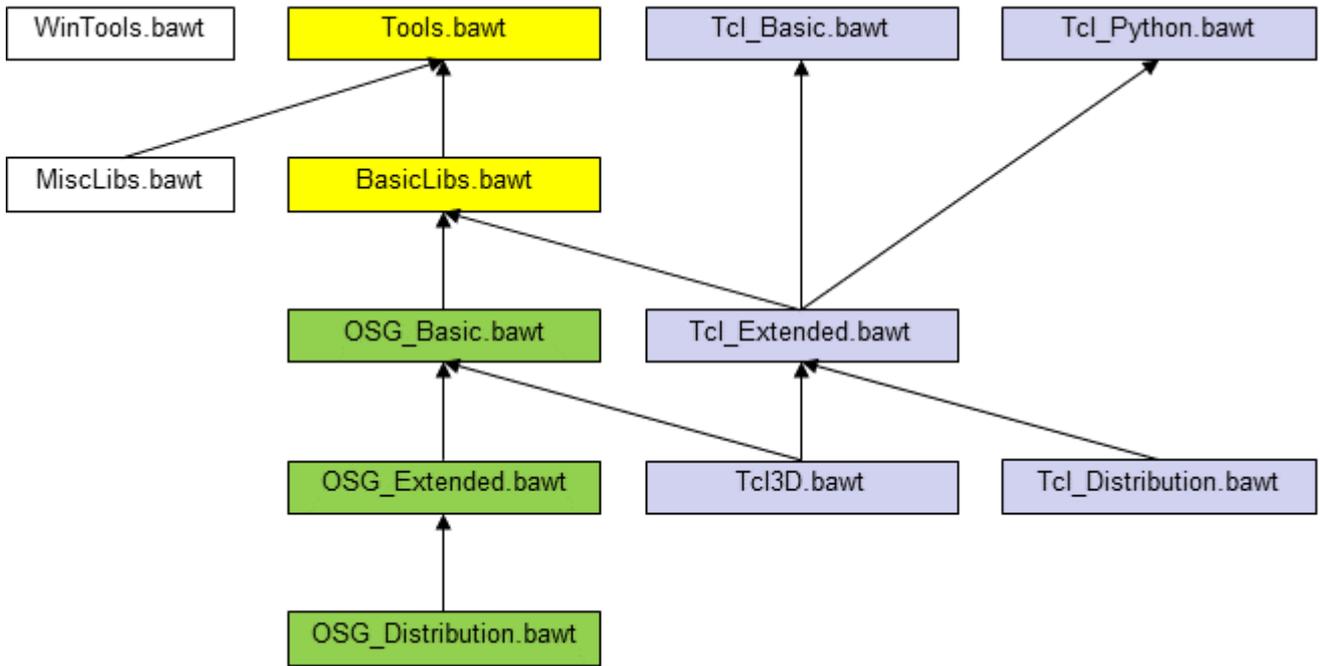

For the **Tcl** ecosystem the following *Setup* files are currently supported.

<i>Tcl_MinimalDist.bawt</i>	Builds Tcl, Tk and creates an InnoSetup based setup file on Windows or an installation shell script on Unix.
<i>Tcl_Basic.bawt</i>	Builds Tcl, Tk, Tckit and Tcl/Tk packages, which do not depend on 3rd party libraries. On Windows all libraries can be compiled with MSYS/MinGW.
<i>Tcl_Python.bawt</i>	Extracts the binary Python distribution on Windows and builds the tclpy package.
<i>Tcl_Extended.bawt</i>	Builds all libraries of <i>Tcl_Basic.bawt</i> , <i>Tcl_Python.bawt</i> and Tcl/Tk packages which depend on 3rd party libraries, like SWIG, CMake, libressl or image libraries. On Windows all libraries can be compiled with MSYS/MinGW.
<i>Tcl3D.bawt</i>	Builds all libraries of <i>Tcl_Extended.bawt</i> and the extended version of Tcl3D, which depends on 3rd party libraries like OpenSceneGraph, SDL, FTGL.
<i>Tcl_Distribution.bawt</i>	Builds all libraries of <i>Tcl_Extended.bawt</i> and creates an InnoSetup based setup file on Windows or an installation shell script on Unix.

For the **OpenSceneGraph** ecosystem the following *Setup* files are currently supported.

<i>OSG_Basic.bawt</i>	Builds OpenSceneGraph with basic plugin libraries as needed by Tcl3D. On Windows all libraries can be compiled with MSYS/MinGW.
<i>OSG_Extended.bawt</i>	Builds all libraries of <i>OSG_Basic.bawt</i> and builds OpenSceneGraph with extended plugin libraries, as well as libraries depending on OpenSceneGraph like osgEarth.
<i>OSG_Distribution.bawt</i>	Builds all libraries of <i>OSG_Extended.bawt</i> and creates an InnoSetup based setup file on Windows or an installation shell script on Unix.

Both the **OpenSceneGraph** ecosystem as well as the extended **Tcl** versions need special tools for building or basic libraries they depend upon.

<i>Tools.bawt</i>	Builds tools needed for building of libraries, like CMake or SWIG.
<i>BasicLibs.bawt</i>	Builds basic libraries needed by other libraries like several image libraries, zlib, freetype, ffmpeg and libressl.

There are two other *Setup* files not directly related to one of the above-mentioned ecosystems.

<i>WinTools.bawt</i>	Convenience tools for Windows supplied as precompiled binaries like Vim or Doxygen.
<i>MiscLibs.bawt</i>	Builds miscellaneous libraries not directly related to Tcl or OpenSceneGraph like mathematical, geographical or XML libraries.

See the tables at the end of this chapter for the detailed content of the *Setup* files.

*Setup* files are standard Tcl script files. They must have one or more calls to the **BAWT** *Setup* procedure for each library being built. Optionally one or more calls to the **BAWT** *Include* procedure can be specified to add dependent libraries.

The *Setup* procedure has the following signature:

```
proc Setup { libName zipFile buildFile args }
```

The following 3 mandatory parameters must be specified:

- **libName:** Library name.
- **zipFile:** Zipped library source file or library source directory.
- **buildFile:** File containing build script for the library (see next chapter).

The following optional build parameters are currently supported:

<i>Release</i>	Build the Release version of the library. This is the default.
<i>Debug</i>	Build the Debug version of the library. Note, that not all libraries may support Debug mode.
<i>NoWindows</i>	Do not build the library on Windows.
<i>NoLinux</i>	Do not build the library on Linux.
<i>NoDarwin</i>	Do not build the library on Darwin.
<i>NoDarwin-arm</i>	Do not build the library on ARM based Darwin.
<i>NoDarwin-intel</i>	Do not build the library on Intel based Darwin.
<i>WinCompiler=winCompiler</i>	Specify the Windows compiler to use. Valid Windows compiler names are: <i>gcc</i> , <i>vs</i> . Note, that the <i>Build</i> file must have support for both Visual Studio and MSYS/MinGW instructions.
<i>ForceVS (Deprecated)</i>	Force using Visual Studio instead of using MSYS/MinGW. Note, that the <i>Build</i> file must have support for both Visual Studio and MSYS/MinGW instructions.
<i>Version=X.Y.Z</i>	Specify or override a version string for the library. Use this option, if building a library from a directory (ex. your repository workspace), which does not have a version number included in the directory name.
<i>MaxParallel=Platform:NumJobs</i>	Specify the number of parallel build jobs for a specific platform. Some build systems do not work correctly with lots of parallel builds. Valid platform names are: <i>Windows</i> , <i>Linux</i> , <i>Darwin</i> . The platform name may be optionally appended by the compiler type <i>vs</i> or <i>gcc</i> . Example: <i>MaxParallel=Windows-gcc:2</i>
<i>NoParallel=Platforms (Deprecated)</i>	Specify platforms as comma separated list for which parallel builds should be disabled. Valid platform names are: <i>Windows</i> , <i>Linux</i> , <i>Darwin</i> .

<i>All other strings</i>	Strings not matching any of the above patterns are interpreted as a user configuration string. User configuration strings are either appended to the <code>CMake</code> or <code>configure</code> commands of the library or can be evaluated by the Build script. See chapter <a href="#">3.3.2 User configurable build files</a> for a description of user configuration strings.
--------------------------	---

The next tables list the contents of the currently available *Setup* files.

<b>Setup file Tools.bawt</b>			
# Builds tools needed for building of libraries, like CMake or SWIG.			
# Setup	LibName	ZipFile	BuildFile BuildOptions
Setup	CMake	CMake-3.21.4.7z	CMake.bawt
Setup	pkgconfig	pkgconfig-0.29.2.7z	pkgconfig.bawt
Setup	SWIG	SWIG-4.1.1.7z	SWIG.bawt
Setup	yasm	yasm-1.3.0.7z	yasm.bawt

<b>Setup file BasicLibs.bawt</b>			
# Builds basic libraries needed by several other libraries.			
Include "Tools.bawt"			
# All of the following libraries can be compiled on Linux or Darwin, # but it is better to use the system provided libraries.			
# Setup	LibName	ZipFile	BuildFile BuildOptions
# Basic library needed by most other libraries.			
Setup	ZLib	ZLib-1.2.13.7z	ZLib.bawt NoLinux NoDarwin
Setup	xz	xz-5.2.7.7z	xz.bawt NoLinux NoDarwin
# Basic Image libraries.			
Setup	giflib	giflib-5.2.1.7z	giflib.bawt NoLinux
Setup	libwebp	libwebp-1.2.4.7z	libwebp.bawt NoLinux
Setup	JPEG	JPEG-9.e.7z	JPEG.bawt NoLinux NoDarwin
Setup	openjpeg	openjpeg-2.5.0.7z	openjpeg.bawt
Setup	PNG	PNG-1.6.38.7z	PNG.bawt NoLinux MaxParallel=Windows-gcc:1
Setup	TIFF	TIFF-4.4.0.7z	TIFF.bawt NoLinux NoDarwin
Setup	ffmpeg	ffmpeg-4.4.1.7z	ffmpeg.bawt
Setup	Freetype	Freetype-2.10.4.7z	Freetype.bawt NoLinux NoDarwin
Setup	libressl	libressl-2.9.2.7z	libressl.bawt
if { [UseVisualStudio "primary"] && [GetVisualStudioVersion] <= 2008 } {			
# Visual Studio 2008			
Setup	SDL	SDL-2.0.4.7z	SDL.bawt
} elseif { [UseVisualStudio "primary"] && [GetVisualStudioVersion] == 2010 } {			
# Visual Studio 2010			
Setup	SDL	SDL-2.0.8.7z	SDL.bawt
} else {			
Setup	SDL	SDL-2.26.1.7z	SDL.bawt
}			

<b>Setup file Tcl_MinimalDist.bawt</b>			
# Builds just Tcl and Tk and creates a distribution setup file.			
# Setup	LibName	ZipFile	BuildFile BuildOptions
# Tcl and Tk.			
Setup	Tcl	Tcl-[GetTclVersion].7z	Tcl.bawt

Setup Tk	Tk-[GetTkVersion].7z	Tk.bawt
# Tcl/Tk distribution as InnoSetup installer.		
Setup InnoSetup	InnoSetup-6.2.0.7z	InnoSetup.bawt
Setup SetupTcl	SetupTcl.7z	SetupTcl.bawt

<b>Setup file Tcl_Basic.bawt</b>			
# Builds Tcl, Tk, Starker and Tcl/Tk packages, which do not depend on 3rd party libraries.			
# On Windows all libraries can be compiled with MSys/MinGW.			
# Setup LibName	ZipFile	BuildFile	BuildOptions
# Tcl/Tk, stubs and manual.			
Setup Tcl	Tcl-[GetTclVersion].7z	Tcl.bawt	
Setup TclStubs	Tcl-[GetTclVersion].7z	TclStubs.bawt	
Setup Tk	Tk-[GetTkVersion].7z	Tk.bawt	
Setup TkStubs	Tk-[GetTkVersion].7z	TkStubs.bawt	
Setup TclTkManual	TclTkManual.7z	TclTkManual.bawt	
# Compiled Tcl packages.			
Setup critcl	critcl-3.2.7z	critcl.bawt	
Setup expect	expect-5.45.4.7z	expect.bawt	
Setup DiffUtil	DiffUtil-0.4.2.7z	DiffUtil.bawt	
Setup memchan	memchan-2.3.7z	memchan.bawt	
Setup Mpexpr	Mpexpr-1.2.7z	Mpexpr.bawt	
Setup nacl	nacl-1.1.7z	nacl.bawt	
Setup nsf	nsf-2.4.0.7z	nsf.bawt	
Setup oratcl	oratcl-4.6.7z	oratcl.bawt	
Setup parse_args	parse_args-0.3.3.7z	parse_args.bawt	
Setup rl_json	rl_json-0.11.5.7z	rl_json.bawt	
Setup tbcload	tbcload-1.7.1.7z	tbcload.bawt	
Setup tclcompiler	tclcompiler-1.7.3.7z	tclcompiler.bawt	
Setup tclcsv	tclcsv-2.3.7z	tclcsv.bawt	
Setup tclparser	tclparser-1.8.7z	tclparser.bawt	
Setup tclvfs	tclvfs-1.4.2.7z	tclvfs.bawt	
Setup tclx	tclx-8.4.4.7z	tclx.bawt	
Setup tdom	tdom-0.9.3.7z	tdom.bawt	
Setup trofs	trofs-0.4.9.7z	trofs.bawt	
Setup tserialport	tserialport-1.1.7z	tserialport.bawt	
MaxParallel=Windows-gcc:1			
Setup udp	udp-1.0.11.7z	udp.bawt	
Setup vectcl	vectcl-0.2.7z	vectcl.bawt	
# Compiled Tk packages.			
Setup Canvas3d	Canvas3d-1.2.2.7z	Canvas3d.bawt	
Setup Img	Img-[GetImgVersion].7z	Img.bawt	
Setup imgtools	imgtools-0.3.7z	imgtools.bawt	
Setup itk	itk-4.1.0.7z	itk.bawt	
Setup iwidgets	iwidgets-4.1.1.7z	iwidgets.bawt	
Setup photoresize	photoresize-0.2.7z	photoresize.bawt	
Setup poImg	poImg-2.0.2.7z	poImg.bawt	
Setup Snack	Snack-2.2.11.7z	Snack.bawt	
Setup Tix	Tix-8.4.3.7z	Tix.bawt	NoDarwin
Setup Tkhtml	Tkhtml-3.0.1.7z	Tkhtml.bawt	
Setup tkpath	tkpath-0.3.3.7z	tkpath.bawt	NoDarwin
Setup tksvg	tksvg-0.12.7z	tksvg.bawt	
Setup Tktable	Tktable-2.11.7z	Tktable.bawt	
Setup treectrl	treectrl-2.4.1.7z	treectrl.bawt	
# Compiled Tcl and Tk packages. Windows only.			
Setup iocp	iocp-1.1.0.7z	iocp.bawt	
Setup rbc	rbc-0.2.7z	rbc.bawt	
Setup shellicon	shellicon-0.1.7z	shellicon.bawt	
Setup twapi	twapi-4.7.2.7z	twapi.bawt	
Setup winhelp	winhelp-1.1.7z	winhelp.bawt	
# Compiled Tcl packages. Darwin only.			
Setup Tcladdressbook	Tcladdressbook-1.2.4.7z	Tcladdressbook.bawt	
Setup Tclapplescript	Tclapplescript-2.2.7z	Tclapplescript.bawt	

Setup tclAE	tclAE-2.0.7.7z	tclAE.bawt
# Pure Tcl/Tk packages.		
Setup apave	apave-3.4.8.7z	apave.bawt
Setup awthemes	awthemes-10.4.0.7z	awthemes.bawt
Setup BWidget	BWidget-1.9.16.7z	BWidget.bawt
Setup cawt	cawt-2.9.2.7z	cawt.bawt
Setup materialicons	materialicons-0.2.7z	materialicons.bawt
Setup mentry	mentry-3.16.7z	mentry.bawt
Setup mqtt	mqtt-3.1.7z	mqtt.bawt
Setup ooxml	ooxml-1.6.1.7z	ooxml.bawt
Setup pdf4tcl	pdf4tcl-0.9.4.7z	pdf4tcl.bawt
Setup pgintcl	pgintcl-3.5.1.7z	pgintcl.bawt
Setup puppyicons	puppyicons-0.1.7z	puppyicons.bawt
Setup ruff	ruff-2.3.0.7z	ruff.bawt
Setup scrollutil	scrollutil-1.17.7z	scrollutil.bawt
Setup shtmlview	shtmlview-1.0.0.7z	shtmlview.bawt
Setup tablelist	tablelist-6.20.7z	tablelist.bawt
Setup tclargp	tclargp-0.2.7z	tclargp.bawt
Setup tclfpdf	tclfpdf-1.5.7z	tclfpdf.bawt
Setup tcllib	tcllib-1.21.7z	tcllib.bawt
Setup tclws	tclws-3.4.0.7z	tclws.bawt
Setup tkcon	tkcon-2.7.10.7z	tkcon.bawt
Setup tklib	tklib-0.7.7z	tklib.bawt
Setup ukaz	ukaz-2.0a3.7z	ukaz.bawt
Setup wcb	wcb-3.8.7z	wcb.bawt
Setup windetect	windetect-1.0.0.7z	windetect.bawt
Setup tkwintrack	tkwintrack-2.0.1.7z	tkwintrack.bawt
# Tclkits.		
Setup Tclkit	Tclkit.7z	Tclkit.bawt
# Tcl programs wrapped as starpacks.		
Setup gorilla	gorilla-1.6.0.7z	gorilla.bawt
Setup tclssg	tclssg-2.2.1.7z	tclssg.bawt
Setup tkchat	tkchat-1.482.7z	tkchat.bawt
Setup tksqlite	tksqlite-0.5.13.7z	tksqlite.bawt

<b>Setup file Tcl_Python.bawt</b>			
# Builds binary Python distribution for Windows and tclpy package.			
Include "Tcl_Basic.bawt"			
# Setup	LibName	ZipFile	BuildFile BuildOptions
Setup	Python	Python-3.7.7-[GetBits].7z	Python.bawt Version=3.7.7
Setup	tclpy	tclpy-0.4.7z	tclpy.bawt

<b>Setup file Tcl_Extended.bawt</b>			
# Builds Tcl/Tk packages which depend on 3rd party libraries, # like SWIG, CMake, libressl or image libraries.			
Include "Tools.bawt"			
Include "BasicLibs.bawt"			
Include "Tcl_Basic.bawt"			
Include "Tcl_Python.bawt"			
# Setup	LibName	ZipFile	BuildFile BuildOptions
Setup	mawt	mawt-0.4.1.7z	mawt.bawt
Setup	tcl3dBasic	tcl3d-0.9.5.7z	tcl3dBasic.bawt
Setup	OglInfo	tcl3d-0.9.5.7z	OglInfo.bawt
Setup	tkdnd	tkdnd-2.9.3.7z	tkdnd.bawt
Setup	tkribbon	tkribbon-1.1.7z	tkribbon.bawt
Setup	tcltls	tcltls-1.7.22.7z	tcltls.bawt
Setup	Trf	Trf-2.1.4.7z	Trf.bawt NoDarwin

```

Setup  imgjp2          imgjp2-0.1.7z          imgjp2.bawt
Setup  tzint           tzint-1.1.7z          tzint.bawt

Setup  libgd           libgd-2.3.2.7z        libgd.bawt
Setup  tclgd           tclgd-1.4.7z          tclgd.bawt

Setup  cfitsio         cfitsio-4.1.0.7z      cfitsio.bawt
Setup  fitsTcl         fitsTcl-2.5.7z        fitsTcl.bawt
Setup  pawt            pawt-1.1.0.7z         pawt.bawt

Setup  libffi          libffi-3.4.2.7z       libffi.bawt
Setup  cffi            cffi-1.2.0.7z         cffi.bawt
Setup  Ffidl           Ffidl-0.9.0.7z        Ffidl.bawt

# MuPDF (and therefore dependent libraries tclMuPdf and MuPDFWidget)
# are not available with VisualStudio < 2017.
if { ( [UseVisualStudio "primary"] && [GetVisualStudioVersion] < 2017 ) || \
      ! [IsGccCompilerNewer "4.8.5"] } {
    Setup  mupdf        mupdf-1.18.2.7z      mupdf.bawt
} else {
    Setup  mupdf        mupdf-1.21.1.7z      mupdf.bawt
}
Setup  tclMuPdf        tclMuPdf-2.1.1.7z    tclMuPdf.bawt
Setup  MuPDFWidget     MuPDFWidget-2.2.7z   MuPDFWidget.bawt

Setup  hdc             hdc-0.2.0.1.7z       hdc.bawt
Setup  gdi             gdi-0.9.9.15.7z     gdi.bawt
Setup  printer         printer-0.9.6.15.7z  printer.bawt

# Tcl programs wrapped as starpacks.
Setup  BawtLogViewer   BawtLogViewer-[GetVersion].7z  BawtLogViewer.bawt
Setup  poApps          poApps-2.11.0.7z     poApps.bawt

```

Setup file Tcl3D.bawt			
<pre> # Builds the extended version of Tcl3D, which depends on # 3rd party libraries (OpenSceneGraph, SDL, FTGL).  Include "Tools.bawt" Include "BasicLibs.bawt" Include "Tcl_Extended.bawt" Include "OSG_Basic.bawt"  # Setup LibName  ZipFile          BuildFile          BuildOptions  Setup glfw       glfw-3.3.2.7z      glfw.bawt Setup FTGL       FTGL-2.1.3.7z   FTGL.bawt          NoDarwin Setup tcl3dFull  tcl3d-0.9.5.7z    tcl3dFull.bawt </pre>			

Setup file Tcl_Distribution.bawt			
<pre> # Use this Setup file to create a Tcl/Tk distribution.  # Builds Tcl/Tk with basic package libraries. # Include "Tcl_Basic.bawt"  # Builds Tcl/Tk with extended package libraries including Tcl3D. # Include "Tcl3D.bawt"  # Builds Tcl/Tk with extended package libraries. Include "Tcl_Extended.bawt"  # Setup LibName          ZipFile          BuildFile          BuildOptions  # Tcl/Tk distribution as InnoSetup installer. Setup InnoSetup          InnoSetup-6.2.0.7z  InnoSetup.bawt Setup Redistributables   Redistributables.7z  Redistributables.bawt Setup SetupTcl           SetupTcl.7z         SetupTcl.bawt </pre>			

Setup SetupPython	SetupPython.7z	SetupPython.bawt
-------------------	----------------	------------------

```

Setup file OSG_Basic.bawt
# Builds OpenSceneGraph with basic plugin libraries as needed by Tcl3D.

Include "Tools.bawt"
Include "BasicLibs.bawt"

# Setup LibName          ZipFile          BuildFile
BuildOptions

# The following libraries can be compiled on Linux, but for OpenSceneGraph
# we use the librarries installed by the Linux distribution.
Setup freeglut          freeglut-3.2.2.7z          freeglut.bawt          NoLinux
NoDarwin
if { [UseVisualStudio "primary"] && [GetVisualStudioVersion] <= 2010 } {
    Setup jasper          jasper-2.0.14.7z          jasper.bawt          NoLinux
NoDarwin
} else {
    Setup jasper          jasper-2.0.25.7z          jasper.bawt          NoLinux
NoDarwin
}
}

# OpenSceneGraph 3rd party libraries.
Setup curl          curl-7.70.0.7z          curl.bawt

# OpenSceneGraph
Setup OpenSceneGraph OpenSceneGraph-[GetOsgVersion].7z OpenSceneGraph.bawt ; #
Possible deadlock: MaxParallel=Windows-gcc:1
Setup OpenSceneGraphData OpenSceneGraphData-3.4.0.7z          OpenSceneGraphData.bawt
    
```

```

Setup file OSG_Extended.bawt
# Builds OpenSceneGraph with extended plugin libraries, as
# well as libraries depending on OpenSceneGraph like osgEarth.

Include "Tools.bawt"
Include "BasicLibs.bawt"
Include "OSG_Basic.bawt"

# Setup LibName ZipFile          BuildFile          BuildOptions

# Extended OpenSceneGraph 3rd party libraries.
Setup Cal3D          Cal3D-0.120.7z          Cal3D.bawt
if { [UseVisualStudio "primary"] && [GetVisualStudioVersion] <= 2013 } {
    Setup gdal          gdal-2.2.0.7z          gdal.bawt          ; # Possible deadlock: MaxParallel=Windows-
gcc:1
    Setup geos          geos-3.6.3.7z          geos.bawt          ; # Possible deadlock: MaxParallel=Windows-
gcc:1
} else {
    Setup gdal          gdal-2.4.4.7z          gdal.bawt          ; # Possible deadlock: MaxParallel=Windows-
gcc:1
    Setup geos          geos-3.7.2.7z          geos.bawt          ; # Possible deadlock: MaxParallel=Windows-
gcc:1
}
}
Setup GLEW          GLEW-2.2.0.7z          GLEW.bawt
Setup Gl2ps          Gl2ps-1.4.2.7z          Gl2ps.bawt

# Libraries based on OpenSceneGraph.
Setup osgcal          osgcal-0.2.1.7z          osgcal.bawt          MaxParallel=Linux:1 MaxParallel=Windows-
gcc:1

if { [UseVisualStudio "primary"] && [GetVisualStudioVersion] <= 2008 } {
    Setup osgearth          osgearth-2.8.7z          osgearth.bawt          ; # Possible deadlock:
MaxParallel=Windows-gcc:1
} else {
    Setup osgearth          osgearth-2.10.1.7z          osgearth.bawt          ; # Possible deadlock:
MaxParallel=Windows-gcc:1
}
    
```

```
}

```

### Setup file OSG\_Distribution.bawt

```
# Use this Setup file to create an OpenSceneGraph distribution.

# Builds OpenSceneGraph with basic plugin libraries.
# Include "OSG_Basic.bawt"

# Builds OpenSceneGraph with extended plugin libraries, as
# well as libraries depending on OpenSceneGraph like osgEarth.
Include "OSG_Extended.bawt"

# Setup LibName          ZipFile          BuildFile          BuildOptions

# OpenSceneGraph distribution as InnoSetup installer.
Setup InnoSetup          InnoSetup-6.2.0.7z  InnoSetup.bawt
Setup Redistributables  Redistributables.7z  Redistributables.bawt
Setup SetupOsg          SetupOsg.7z         SetupOsg.bawt
```

### Setup file MiscLibs.bawt

```
# Builds miscellaneous libraries not related to Tcl or OpenSceneGraph.

Include "Tools.bawt"
Include "BasicLibs.bawt"

# Setup LibName          ZipFile          BuildFile          BuildOptions

if { ( [UseVisualStudio "primary"] && [GetVisualStudioVersion] >= 2022 ) } {
    Setup Boost          Boost-1.78.0.7z    Boost.bawt
} elseif { ( [UseVisualStudio "primary"] && [GetVisualStudioVersion] >= 2015 ) || \
    ( ! [UseVisualStudio "primary"] && [IsWindows] ) || \
    ( ! [IsWindows] && [IsGccCompilerNewer "4.9.0"] ) } {
    # This boost version can only be compiled with
    # Windows: VS 2015 or newer.
    # Unix   : gcc 4.9.0 or newer
    Setup Boost          Boost-1.75.0.7z    Boost.bawt
} else {
    # This boost version cannot be compiled with MinGW gcc.
    Setup Boost          Boost-1.58.0.7z    Boost.bawt
}

Setup ccl                ccl-4.0.6.7z      ccl.bawt
Setup CERTI              CERTI-3.5.1.7z     CERTI.bawt
MaxParallel=Windows-gcc:1 NoLinux
Setup Eigen              Eigen-3.3.9.7z     Eigen.bawt
Setup fftw               fftw-3.3.9.7z      fftw.bawt
if { [UseVisualStudio "primary"] && [GetVisualStudioVersion] <= 2013 } {
    Setup GeographicLib   GeographicLib-1.50.1.7z  GeographicLib.bawt
} else {
    Setup GeographicLib   GeographicLib-1.52.7z    GeographicLib.bawt
}
Setup GeographicLibData  GeographicLibData.7z    GeographicLibData.bawt
Setup KDIS               KDIS-2.9.0.7z      KDIS.bawt
Setup libxml2            libxml2-2.9.14.7z   libxml2.bawt
Setup sqlite3            sqlite3-3.39.4.7z   sqlite3.bawt
Setup tinyxml2           tinyxml2-8.0.0.7z   tinyxml2.bawt
Setup Xerces             Xerces-3.2.4.7z     Xerces.bawt
```

### Setup file WinTools.bawt

```
# Builds miscellaneous tools for Windows.

# Setup LibName          ZipFile          BuildFile          BuildOptions
Setup Blender            Blender-3.0.0.7z   Blender.bawt
Setup DirectXTex        DirectXTex-2021_11.7z  DirectXTex.bawt
Setup Doxygen            Doxygen-1.8.15.7z   Doxygen.bawt
```

Setup Vim	Vim-9.0.0.7z	Vim.bawt
-----------	--------------	----------

### 3.3 Build Files

Build files include the logic needed to extract, configure, compile and distribute a library. They must define the following two procedures, where `libName` is replaced with the name of the library as specified as first parameter of the `Setup` procedure:

- `Init_libName { libName libVersion }`
- `Build_libName { libName libVersion buildDir instDir devDir distDir }`

The parameter values for these procedures are supplied by the **BAWT** framework.

<code>libName</code>	Library name as supplied with first parameter of procedure <code>Setup</code> .
<code>libVersion</code>	Library version extracted from source file name as supplied with second parameter of procedure <code>Setup</code> .
<code>buildDir</code>	<code>[file join [GetOutputBuildDir] \$libName]</code>
<code>instDir</code>	<code>[file join [GetOutputInstDir] \$libName]</code>
<code>devDir</code>	<code>[GetOutputDevDir]</code>
<code>distDir</code>	<code>[GetOutputDistDir]</code>

The logic of a `Build` file will be explained with the following excerpt of the `Build` file of Tcl package `udp`:

```

Build file udp.bawt
# Copyright: 2016-2023 Paul Obermeier (obermeier@tcl3d.org)
# Distributed under BSD license.
#
# BuildType: MSys / gcc

proc Init_udp { libName libVersion } {
    SetScriptAuthor    $libName "Paul Obermeier" "obermeier@tcl3d.org"
    SetLibHomepage     $libName "https://sourceforge.net/projects/tcludp/"
    SetLibDependencies $libName "Tcl"
    SetPlatforms       $libName "All"
    SetWinCompilers    $libName "gcc"
}

proc Build_udp { libName libVersion buildDir instDir devDir distDir } {
    if { [UseStage "Extract" $libName] } {
        ExtractLibrary $libName $buildDir
    }

    if { [UseStage "Configure" $libName] } {
        TeaConfig $libName $buildDir $instDir
    }

    if { [UseStage "Compile" $libName] } {
        MSysBuild $libName $buildDir "install-binaries"
    }

    if { [UseStage "Distribute" $libName] } {
        StripLibraries "$instDir"
        LibFileCopy "$instDir" "$devDir/[GetTclDir]" "*" true
        LibFileCopy "$instDir" "$distDir/[GetTclDir]" "*" true
    }

    return true
}

```

The `Init_libName` procedure must call the following **BAWT** framework procedures:

<code>SetScriptAuthor</code>	Specify name and mail address of the build script author. This information is used for command line option <code>--authors</code> .
------------------------------	--

<i>SetLibHomepage</i>	Specify the homepage of the library. This information is used for command line option <code>--homepages</code> .
<i>SetLibDependencies</i>	Specify the dependencies of the library. If the library has no dependencies, specify "None" as parameter. Otherwise, a variable number of library names can be given. This information is used for command line option <code>--dependencies</code> .
<i>SetPlatforms</i>	Specify the supported platforms. Valid keywords are: "Windows" "Linux" "Darwin" "All". This information is used for command line option <code>--platforms</code> .
<i>SetWinCompilers</i>	Specify the supported compilers on Windows. Optional. The first specified compiler is used as default. Valid keywords are: "gcc" "vs". This information is used for command line option <code>--wincompilers</code> .

The *Build\_libName* procedure must check, which stage or stages should be executed (using procedure *UseStage*) and supply appropriate Tcl commands for each stage.

The following four stages can be handled in a build file:

- Extract
- Configure
- Compile
- Distribute

See chapter [4 Build Stages](#) for details on these stages and typical commands executed for each stage.

Errors can be indicated by calling the **BAWT** procedure *SetErrorMessage* and returning *false*.

Optionally a procedure named *Env\_libName* may be specified in a build file. This procedure has the same signature as the *Build\_libName* procedure and may be used to specify library specific environment variables (using **BAWT** procedure *SetEnvVar*) or to add a value to the system environment variable *Path* (using **BAWT** procedure *AddToPathEnv*).

The following excerpt from the Tcl build file shows a usage example:

```
proc Env_Tcl { libName libVersion buildDir instDir devDir distDir } {
    SetEnvVar      "TCLLIBPATH" "$devDir/[GetTclDir]/lib"
    AddToPathEnv  "$devDir/opt/$libName/bin"
}
```

### 3.3.1 User supplied build files

**BAWT** version 2.0 introduced the functionality of user supplied build files, which allows to add custom build files for existing libraries without the need to change the default build files.

To create a user supplied build file, make a copy of the build file (ex. *tcllib.bawt*) and give the copied file the name *tcllib\_User.bawt*. By appending the string *\_User* to the root file name, BAWT automatically detects the file as a user supplied build file and uses this file instead of the original build file.

You can then edit the user supplied build file according to your needs, ex. do not create the *critcl* based modules for *tcllib*.


The user supplied build scripts must be located in directories from the library search paths, see chapter [3.1.3 Directory access](#).

**Note, that user supplied build scripts are not considered in action `--update`, see chapter [5 Build Process](#).**

You may also give the user supplied build file any name you like. Then you have to notify BAWT to use that file for a specific library by using command line option `--user`.

If you do not want to use the user supplied files, there is no need to delete or rename them. Specify command line option `--nouserbuilds` to disable all user build files.

If using the [graphical log viewer](#), the application of a user supplied build file is indicated in the corresponding column, see next figure.

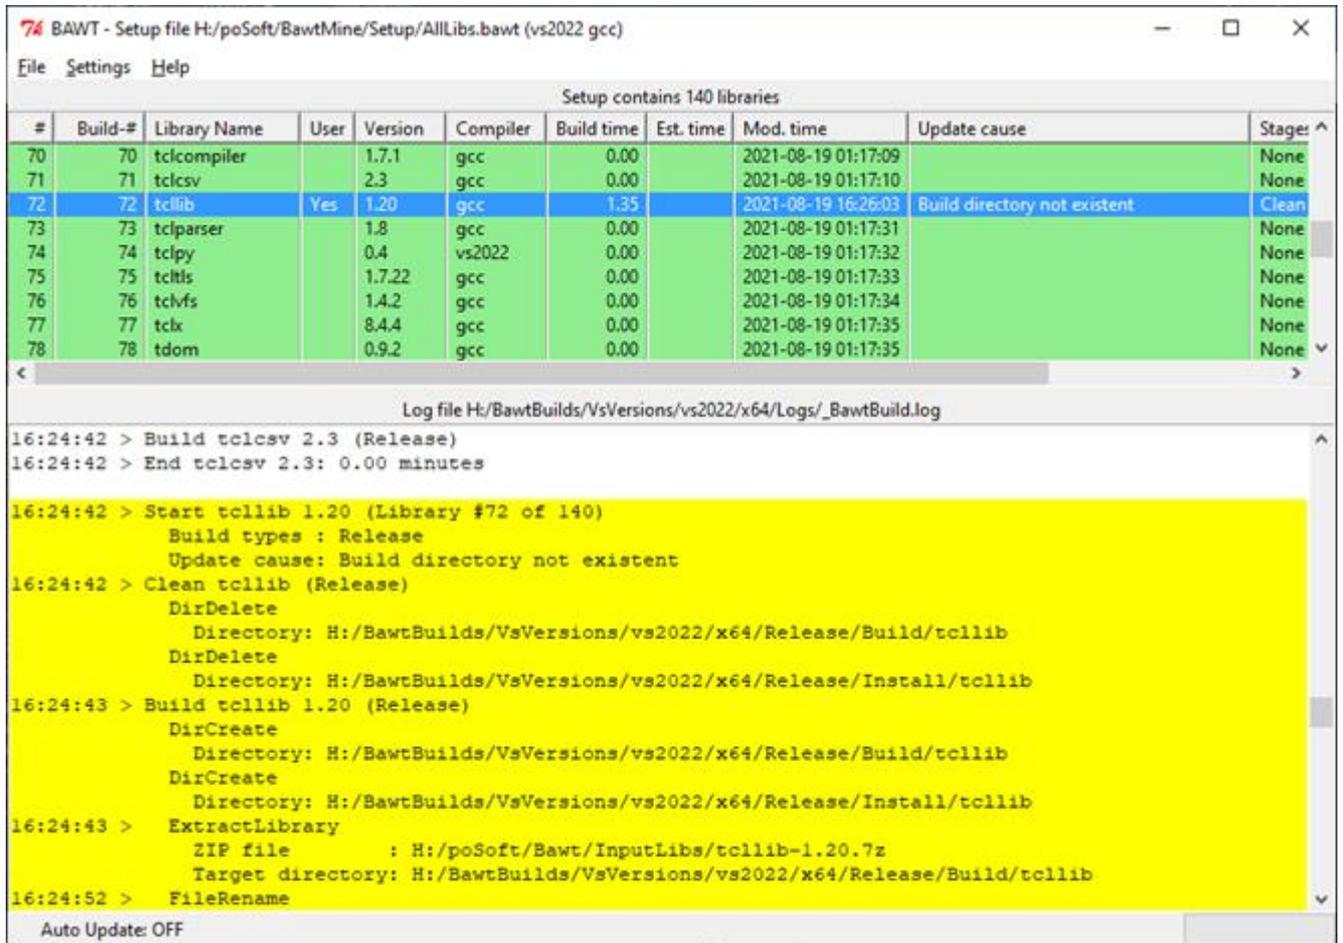

### 3.3.2 User configurable build files

Some of the library build files are already setup to supply user configuration options. These configuration options can be supplied using the following methods:

As command line option `--copt`

As option string of the `Setup` procedure, see chapter [3.2 Setup Files](#)

The following build scripts currently support user configuration options:

Build script	User options
Img.bawt	Any <code>-DXXX</code> option usable for <code>CFLAGS</code> environment variable
poImg.bawt	
Tclkit.bawt	
Tk.bawt	


Build script	User options
SetupOsg.bawt	Tag string for generated Setup file name: <code>Tag=XXX</code> Version string used for InnoSetup: <code>Version=XXX</code>
SetupPython.bawt	
SetupTcl.bawt	

The following example using Tcl version 8.7.a4

```
--copt SetupTcl 'Tag=-BI' --copt SetupTcl 'Version=8.7.0.4'
```

generates an InnoSetup file with the following name:

```
SetupTcl-BI-8.7.a4-x64 Bawt-2.3.1.exe
```

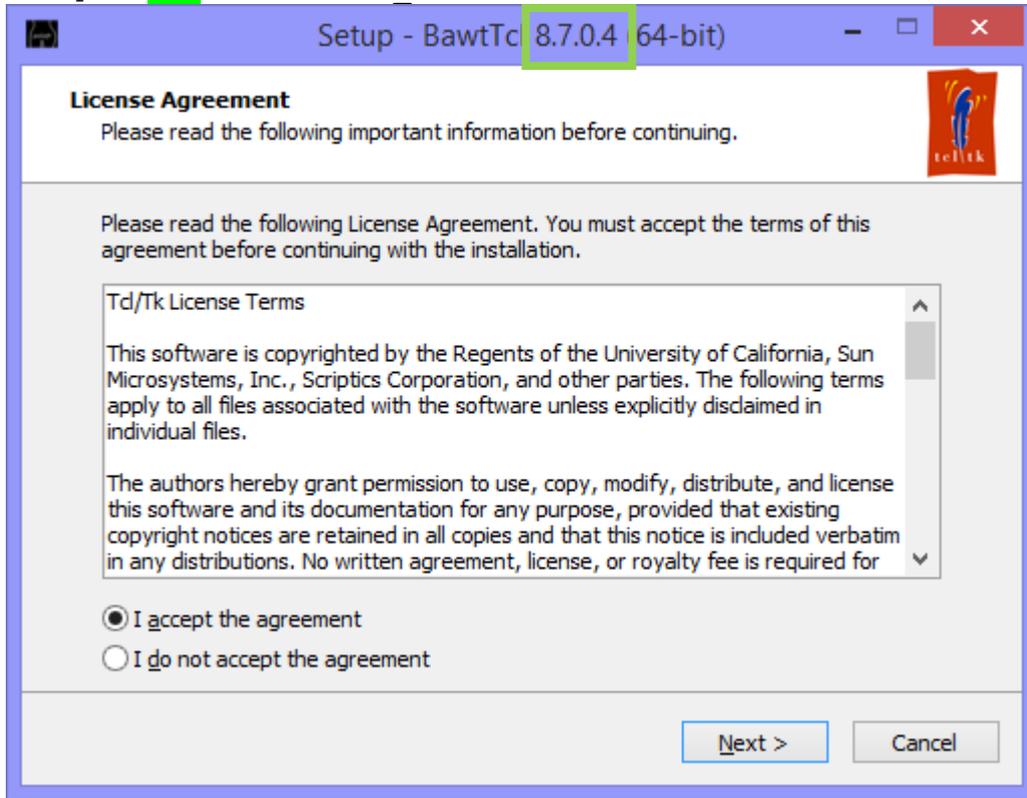

Build script	User options
tcl3dFull.bawt	Use static SDL library: StaticSDL=ON OFF. Default: OFF. Currently only supported for Visual Studio builds.

Example:

```
--copt tcl3dFull 'StaticSDL=ON'
```

Build script	User options
tcllib.bawt	Toggle critcl based compilation: Critcl=ON OFF. Default: ON.

Example:

```
--copt tcllib 'Critcl=OFF'
```

Build script	User options
tcltls.bawt	Toggle hardening: Hardening=ON OFF. Default: ON.

Example:

```
--copt tcltls 'Hardening=OFF'
```

If tcltls is compiled with hardening set to ON, it is compiled with option -fstack-protector-all, which needs the libssp-0.dll library. That library is automatically copied into the Tcl/bin directory. If hardening is set to OFF, tcltls does not need this external dependency.

Build script	User options
--------------	--------------

OpenSceneGraph.bawt	<p><b>Toggle example compilation:</b>          -DBUILD_OSG_EXAMPLES=ON OFF. <b>Default:</b> OFF.</p> <p><b>Keep the plugin directory structure:</b>          KeepPluginFolder=ON OFF. <b>Default:</b> OFF.</p>
---------------------	--

**Example:**

```
--copt OpenSceneGraph '-DBUILD_OSG_EXAMPLES=ON'
```


Build script	User options
osgearth.bawt	<p><b>Toggle example compilation:</b>          -DBUILD_OSGEARTH_EXAMPLES=ON OFF. <b>Default:</b> OFF.</p>

**Example:**

```
--copt osgearth '-DBUILD_OSGEARTH_EXAMPLES=ON'
```

## 4 Build Stages

This chapter describes the stages used in the **BAWT** framework to build the libraries specified in a *Setup* file.

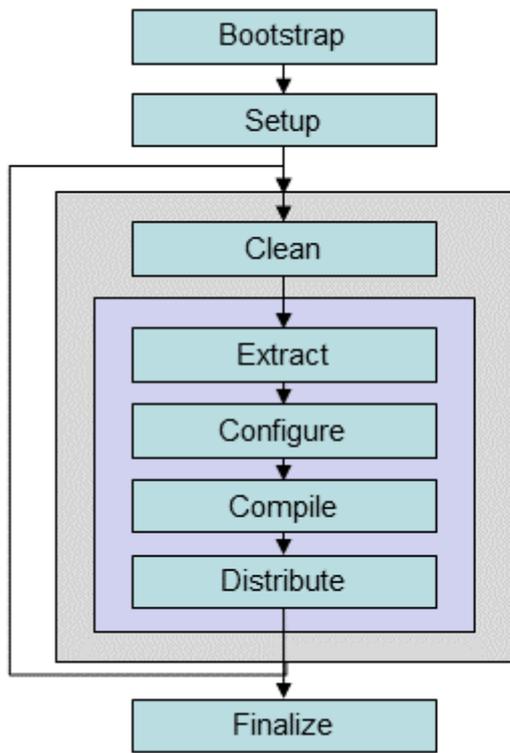

The stages are grouped into global and library specific ones. The global stages `Bootstrap`, `Setup` and `Finalize` are called only once per **BAWT** execution, the library specific stages are called once for each library.

Four of the library specific stages (`Extract`, `Configure`, `Compile`, `Distribute`) are user configurable. Actions for these stages must be specified in the library *Build* files.

### 4.1 Stage Bootstrap


Extract and copy bootstrap tools.

This stage is executed automatically on each invocation of *Bawt.tcl*.

It is not executed, if command line option `--list` is specified.

**BAWT** needs the **7-Zip** program to extract the library source distributions. For Windows and Darwin, a version of the **7-Zip** program is included in the **BAWT** framework. On Linux **7-Zip** is typically already available with the operating system or can be installed as Linux package `p7zip` or `p7zip-full`.

On Windows lots of the libraries are built with the MSYS/MinGW suite. Different versions of MSYS/MinGW are available on the **BAWT** download site.

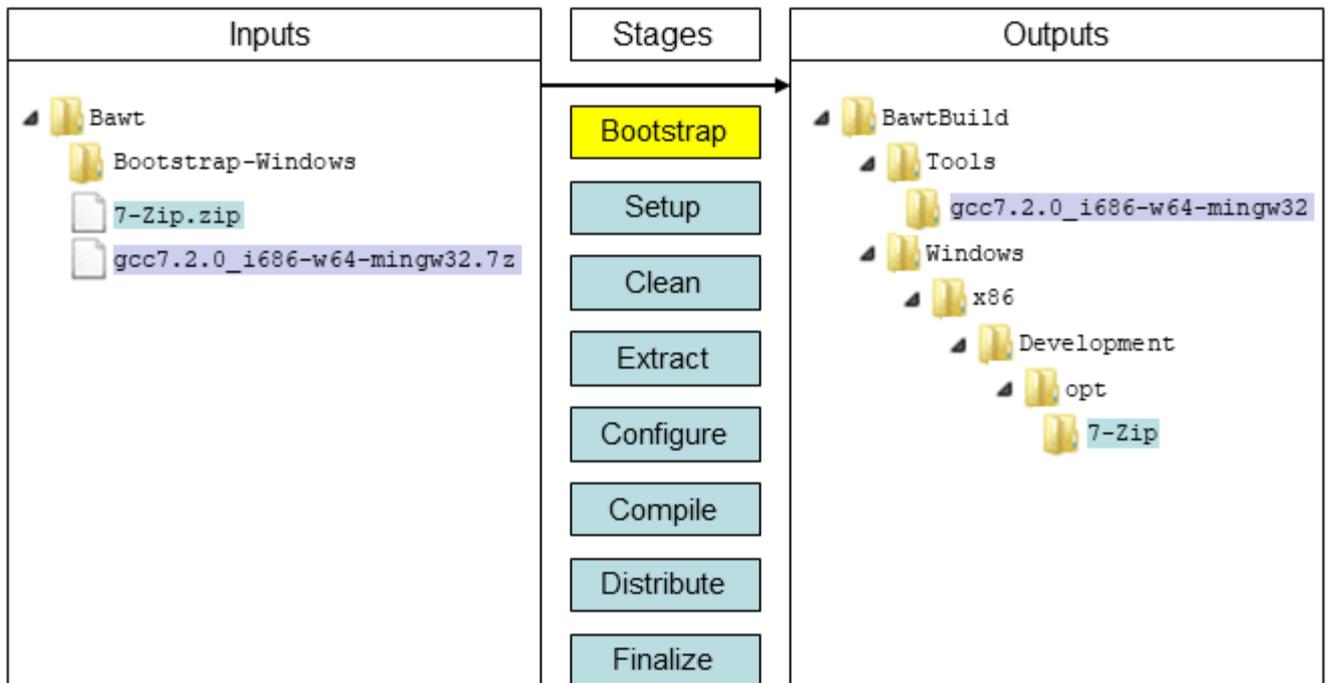

Command line options influencing this stage:

[--gccversion](#)  
[--architecture](#)  
[--toolsdir](#)

The 7-Zip distribution itself must be compressed with standard ZIP, so that it can be extracted with the `vfss::zip` package contained in the `tclkit`. All other tools and libraries are compressed in 7-Zip format because of better compression rates (Example: MSYS/MinGW is 2 times smaller with 7z).

## 4.2 Stage Setup

Read and execute the specified *Setup* file.

This stage is executed automatically on each invocation of *Bawt.tcl*.


Check for existence of the library source code (either as a 7z file or directory) as well as the according *Build* file. If these do not exist in the library directory *InputLibs* of the current working directory (additional directories can be added with command line option [--libdir](#)) or are older than those available on the **BAWT** website, they are downloaded from the **BAWT** website.

If this fails, a fatal error is thrown and the build process is stopped.

The version number of the library is extracted from the file or directory name of the library.

If build action is set to *Update*, the necessary build stages are determined according to the existence of the library source and *Build* files as well as to the modification times of the corresponding build and install directories.

Checking for newer versions and automatic downloading may be skipped by specifying command line option [--noonline](#).

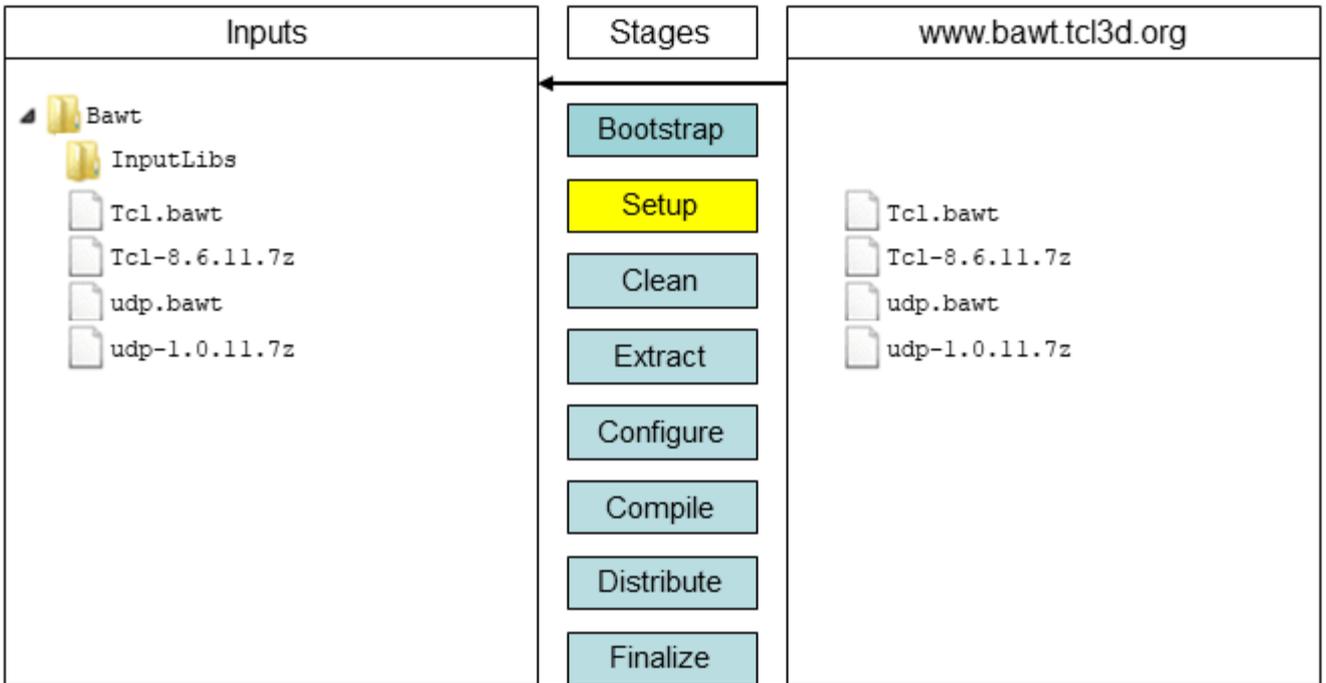


Command line options influencing this stage:

- [--noonline](#)
- [--norecursive](#)
- [--sort](#)
- [--url](#)

### 4.3 Stage Clean

Remove library specific build and install directory.

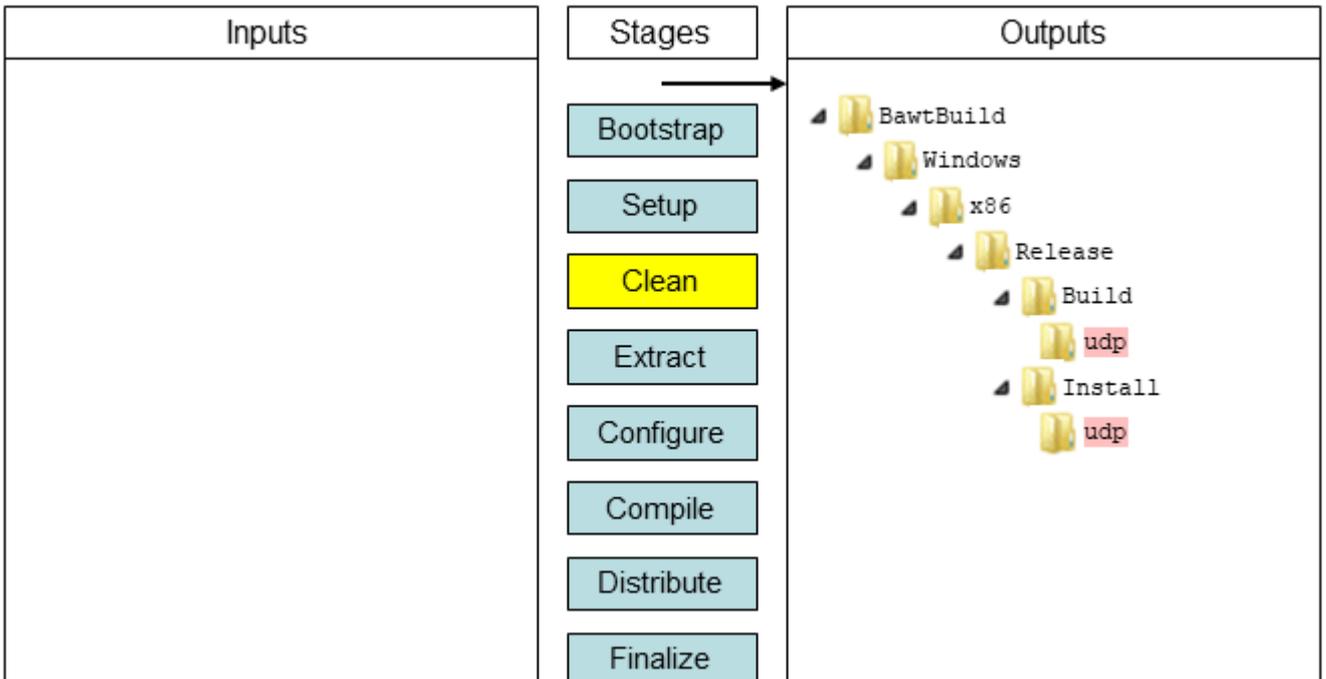


Command line options influencing this stage:

- [--clean](#)
- [--timeout](#)

## 4.4 Stage Extract

Extract library source code into build directory.

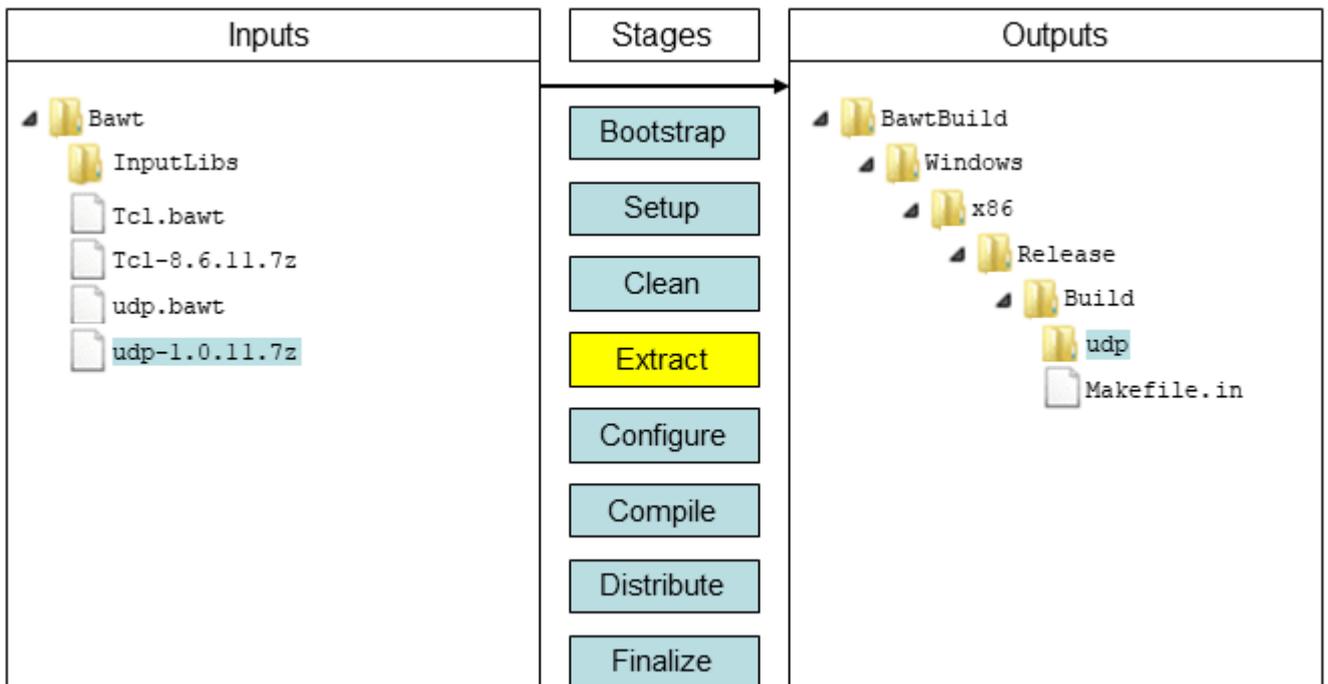

In stage `Extract` the library source code will be extracted and copied into the build directory. This is achieved by calling the **BAWT** procedure `ExtractLibrary`, which cares about having either a source directory or a compressed source file.

Ideally the source code can be compiled without any changes. If changes have to be done, it is preferred not to edit the source code manually, but make the changes in the build script after extraction.

**BAWT** has two utility procedures for this purpose:


- `ReplaceLine`
- `ReplaceKeywords`

Command line options influencing this stage:

[`--extract`](#)

## 4.5 Stage Configure

Configure library for compilation.

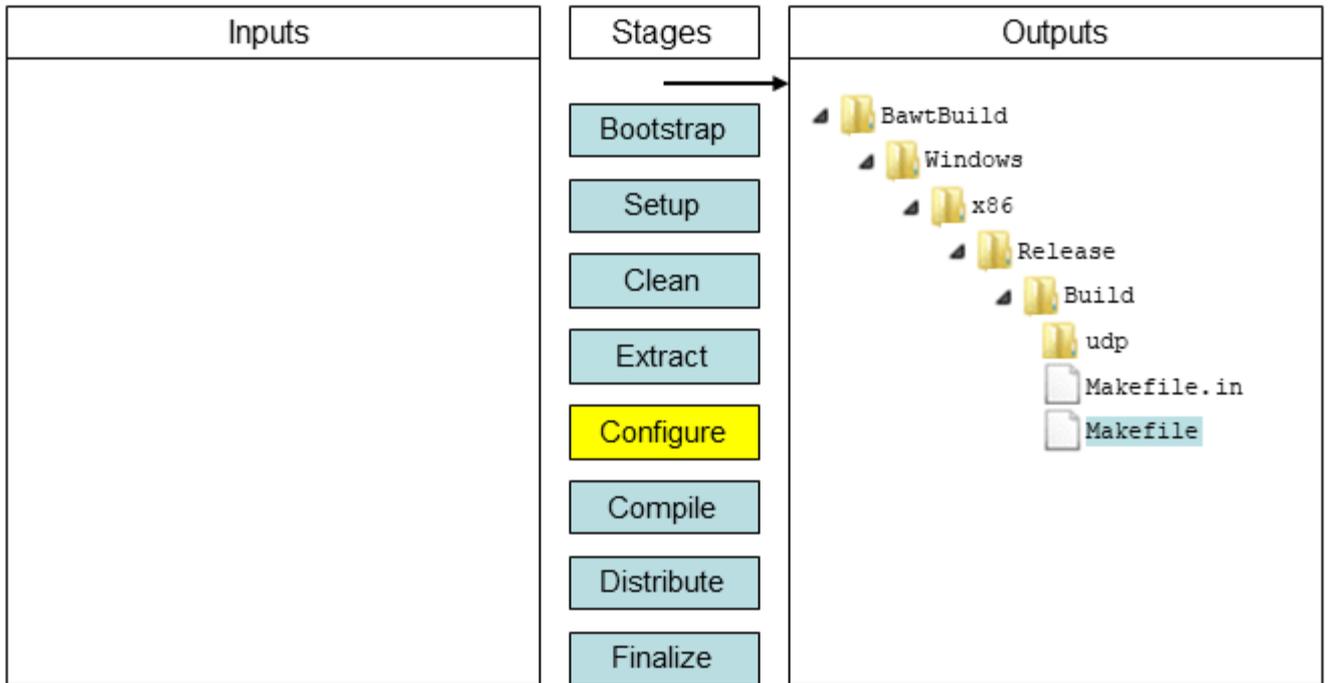

In stage `Configure` the library will be configured, which generates the appropriate make files for the chosen compiler and platform.

The following high-level **BAWT** procedures are available for configuration tasks:

- `CMakeConfig` when using the CMake build infrastructure.
- `MsysConfig` when using a configure script with “standard” options.
- `TeaConfig` when using the Tcl Extension Architecture for Tcl packages.

See the source code of `Bawt.tcl` to get the default options set by these procedures.

If the build infrastructure does not fit any of the mentioned one above, the configuration command must be built up as a Tcl string and executed with the generic **BAWT** procedure `MsysRun`.

See the miscellaneous build scripts for usage examples.

The following **BAWT** procedures are typically used for configuration tasks:


- `IsIntel`
- `IsArm`
- `IsDebugBuild`
- `IsReleaseBuild`
- `IsWindows`
- `IsLinux`
- `IsDarwin`
- `IsUnix`

Command line options influencing this stage:

- [--configure](#)
- [--architecture](#)
- [--compiler](#)
- [--gccversion](#)
- [--buildtype](#)
- [--copt](#)

## 4.6 Stage Compile

Compile and install library.

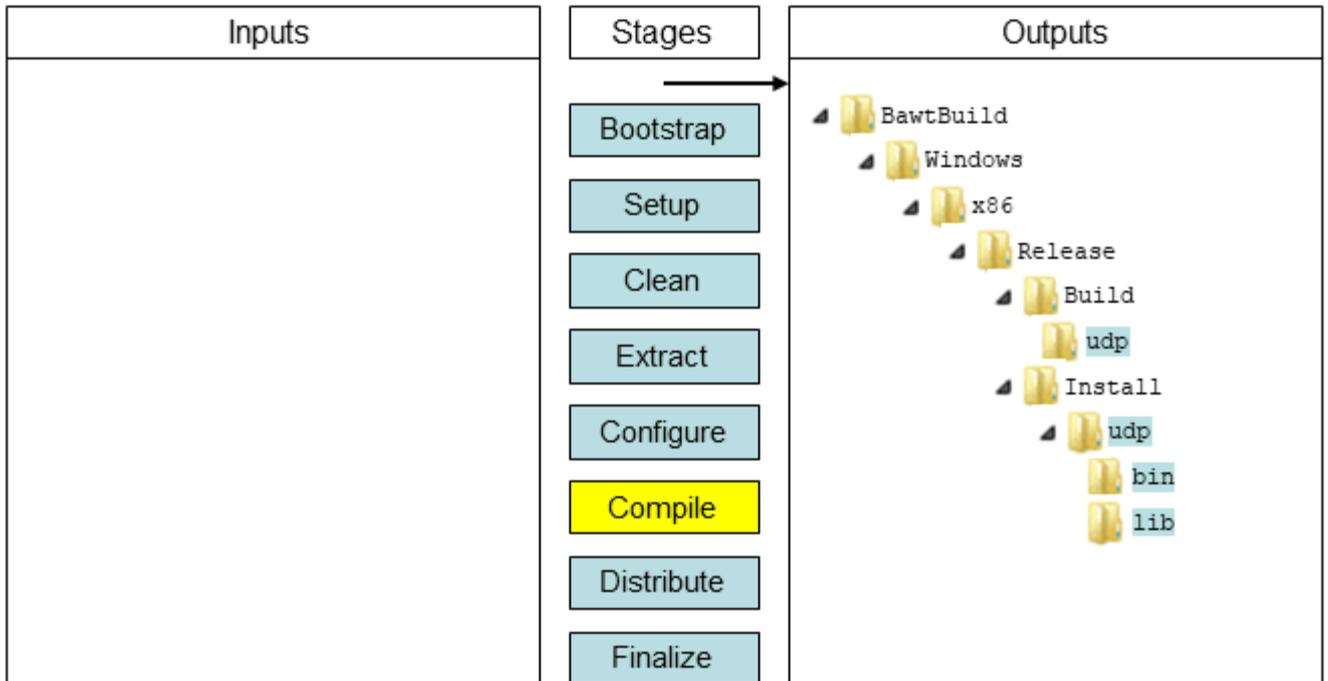

In stage `Compile` the library will be compiled and installed.

The following high-level **BAWT** procedures are available for compilation tasks:

- `CMakeBuild` when using the CMake build infrastructure.
- `MSysBuild` when using the Tcl Extension Architecture for Tcl packages.


If the build infrastructure does not fit any of the two mentioned above, the compilation command must be built up as a Tcl string and executed with either **BAWT** procedure `MSysRun` or `DosRun`.

Command line options influencing this stage:

[--compile](#)  
[--numjobs](#)  
[--nostrip](#)  
[--noimportlibs](#)

## 4.7 Stage Distribute

Copy relevant files into developer and user distribution directories.

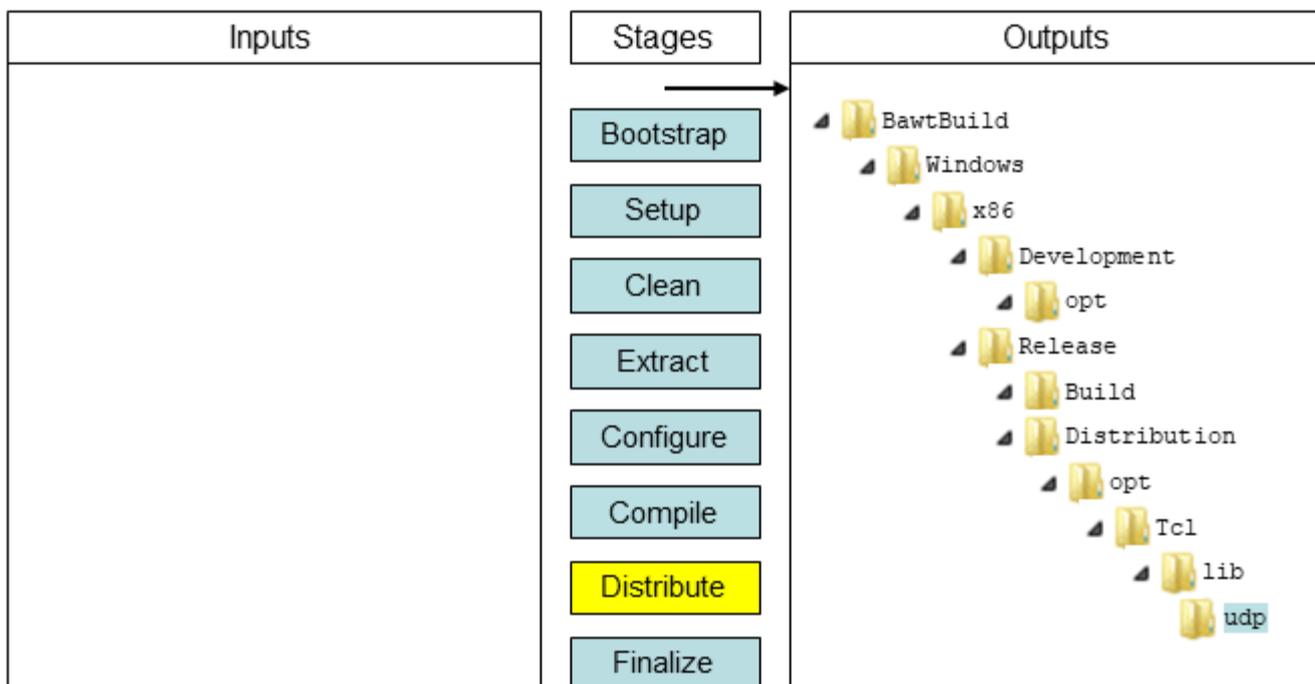

In stage `Distribute` the library will be copied into the distribution and development directories. The following **BAWT** procedures are typically used for distribution tasks:


- `SingleFileCopy`
- `MultiFileCopy`
- `LibFileCopy`
- `FileRename`
- `UseTclPkgVersion`
- `IsDebugBuild`
- `IsReleaseBuild`
- `IsWindows`
- `IsLinux`
- `IsDarwin`
- `IsUnix`
- `ErrorAppend`

Command line options influencing this stage:

[`--distribute`](#)  
[`--noversion`](#)

## 4.8 Stage Finalize

Perform final actions, optionally call user supplied `Finalize` procedure and print summary.

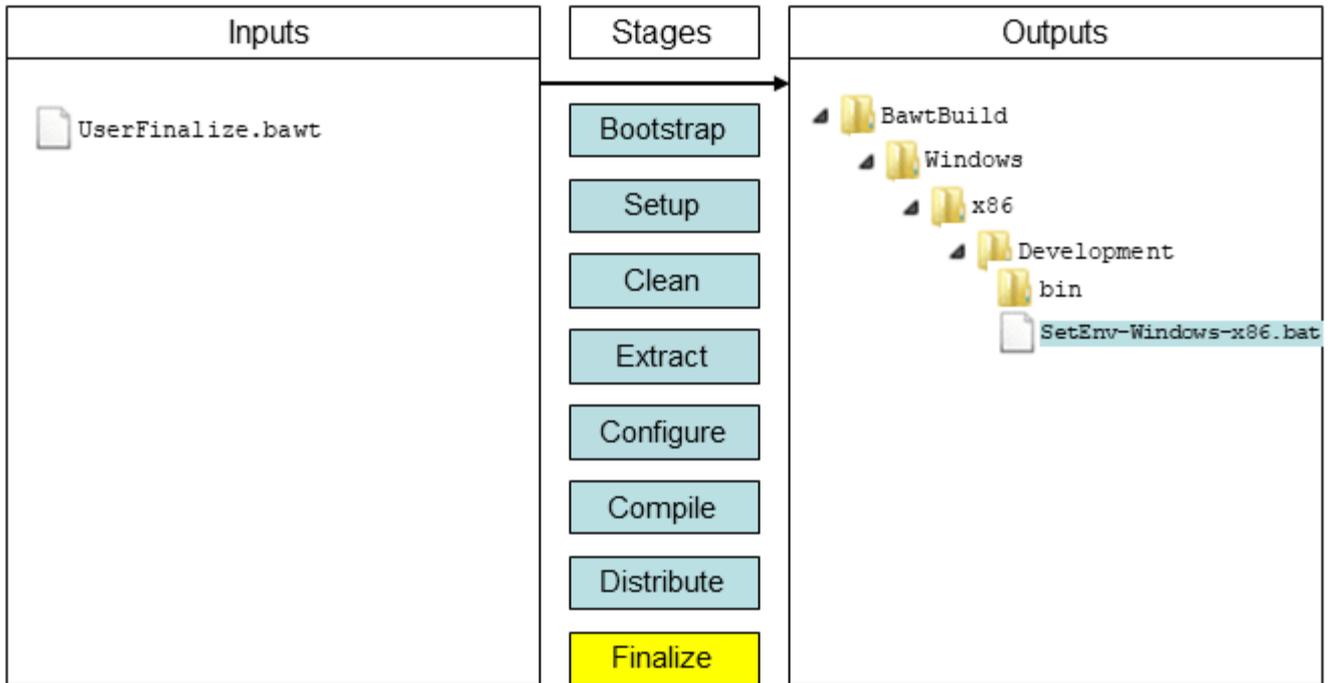

The Finalize stage is performed automatically at the end of the build process or can be manually selected with command line option [--finalize](#).

The Finalize stage creates an environment file in the *Development/bin* directory called *SetEnv-\*.bat* or *SetEnv-\*.sh*. It contains all the environment variables set by the *Env\_libName* procedures of the libraries.

If running on Windows with Visual Studio it also copies the appropriate Visual Studio runtime libraries into the *Development/bin* directory. If you do not want to copy these runtime libraries, use command line option [--noruntimelibs](#).

To supply a user defined finalize action to **BAWT**, create a file containing a procedure named *Finalize*. See the file *UserFinalize.tcl* in **BAWT** directory *Setup* as an example.

You can use any standard Tcl procedure or one of the **BAWT** procedures like *Log* or *MultiFileCopy* in the *Finalize* procedure.

To make the file containing your Finalize procedure available for the **BAWT** build process, use command line option [--finalizefile](#).

Command line options influencing this stage:

[--finalize](#)  
[--finalizefile](#)  
[--noruntimelibs](#)

## 5 Build Process

This chapter gives insight into the BAWT build process from the perspective of a user of BAWT as well as from the perspective of a developer, who wants to extend BAWT with new libraries.

### 5.1 User Perspective

As described in the previous chapter a specific stage can be executed with one of the following command line action options. These specific action options are typically only used when integrating a new library into BAWT.

```
--clean      : Clean library specific build and install directories.
--extract    : Extract library source from a ZIP file or a directory.
--configure  : Perform the configure stage of the build process.
--compile    : Perform the compile stage of the build process.
--distribute : Perform the distribution stage of the build process.
--finalize   : Generate environment file and call user supplied Finalize procedure.
```

The following global command line action options are typically used for building or updating the BAWT libraries.

```
--complete  : Perform the following stages in order:
               clean, extract, configure, compile, distribute, finalize.
--update    : Perform necessary stages depending on modification times.
               Note: Global stage finalize is always executed.
--simulate  : Simulate update action without actually building libraries.
--touch     : Set modification times of library build directories to current time.
```

Option `--complete` makes a complete rebuild of the specified libraries, while `--update` checks, which libraries have to be rebuilt.

The necessary build stages are determined according to the existence of the library source and *Build* files as well as to the modification times of the corresponding build directories.

It is also checked, if the build of a library has been cancelled or stopped by checking for the existence of a so-called *Progress File*, which is created in the *Logs* directory at the start of a library build and deleted after a successful library build.


Additionally, a check is performed, if a library is dependent of another library, which has been rebuilt. This recursive dependency checking can be switched off with command line option `--norecursive`.

The `--simulate` option performs the same actions as the `--update` option, but does not build anything. It just prints out, which libraries would be rebuilt, if you would execute the `--update` command line option.

It often happens, that only cosmetic changes are done to a Build file, which would cause this library (and all dependent libraries) to be rebuilt. To avoid rebuilding of these libraries, specify the option `--touch`, which sets the modification times of the build directories to the current date and time.

#### 5.1.1 Use Case: Cosmetic change of Build file CMake.bawt

Due to the number of dependencies, a change of Build file *CMake.bawt* would cause a lot of libraries to be rebuilt, as the next screenshot of the *BawtLogViewer* shows, when executing a `--simulate` run.

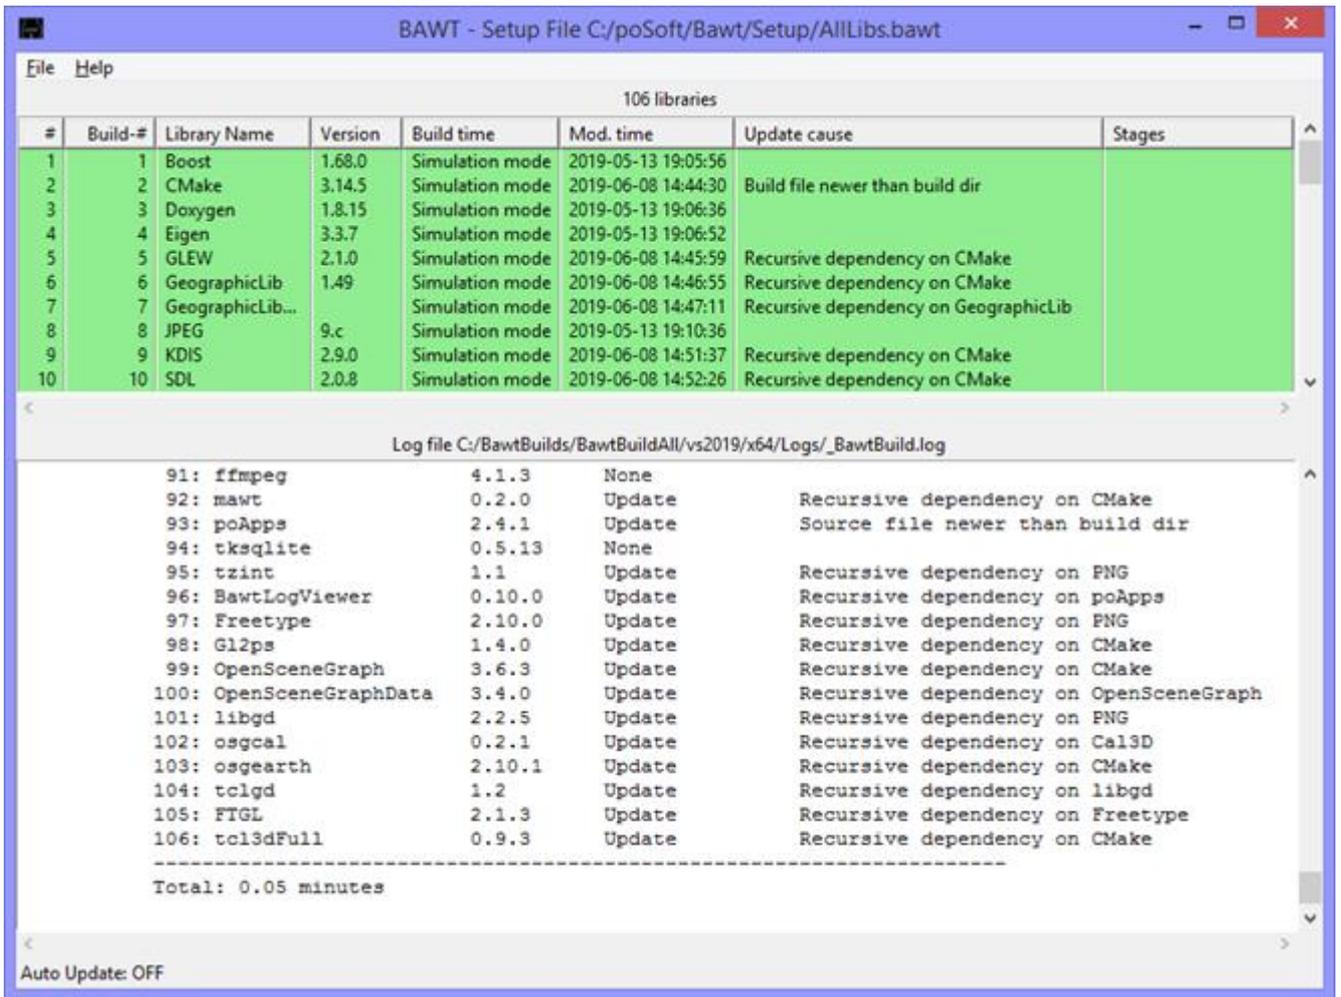

To avoid the rebuild of all of these libraries, which may take a lot of time, we execute a `--touch` run. Note the execution of the `DirTouch` procedure of the BAWT framework shown in the text widget in the lower half of the window.

BAWT - Setup File C:/poSoft/Bawt/Setup/AllLibs.bawt

File Help

106 libraries

#	Build-#	Library Name	Version	Build time	Mod. time	Update cause	Stages
1	1	Boost	1.68.0	0.00 minutes	2019-05-13 19:05:56		
2	2	CMake	3.14.5	0.00 minutes	2019-06-08 14:44:30		
3	3	Doxygen	1.8.15	0.00 minutes	2019-05-13 19:06:36		
4	4	Eigen	3.3.7	0.00 minutes	2019-05-13 19:06:52		
5	5	GLEW	2.1.0	0.00 minutes	2019-06-08 14:45:59		
6	6	GeographicLib	1.49	0.00 minutes	2019-06-08 14:46:55		
7	7	GeographicLib...		0.00 minutes	2019-06-08 14:47:11		
8	8	JPEG	9.c	0.00 minutes	2019-05-13 19:10:36		
9	9	KDIS	2.9.0	0.00 minutes	2019-06-08 14:51:37		
10	10	SDL	2.0.8	0.00 minutes	2019-06-08 14:52:26		

Log file C:/BawtBuilds/BawtBuildAll/vs2019/x64/Logs/\_BawtBuild.log

```


09:52:15 > Start Boost 1.68.0 (Library #1 of 106)
           Build types : Release
09:52:15 > Build Boost 1.68.0 (Release)
           DirTouch
           Directory: C:/BawtBuilds/BawtBuildAll/vs2019/x64/Release/Build/Boost
09:52:15 > End Boost 1.68.0: 0.00 minutes

09:52:15 > Start CMake 3.14.5 (Library #2 of 106)
           Build types : Release
           Add to Path : C:/BawtBuilds/BawtBuildAll/vs2019/x64/Development/opt/CMake/bin
09:52:15 > Build CMake 3.14.5 (Release)
           DirTouch
           Directory: C:/BawtBuilds/BawtBuildAll/vs2019/x64/Release/Build/CMake
09:52:15 > End CMake 3.14.5: 0.00 minutes

09:52:15 > Start Doxygen 1.8.15 (Library #3 of 106)
           Build types : Release
           Add to Path : C:/BawtBuilds/BawtBuildAll/vs2019/x64/Development/opt/Doxygen
09:52:15 > Build Doxygen 1.8.15 (Release)
  
```

Auto Update: OFF

If we now perform an [--update](#) run, none of the libraries are rebuilt.

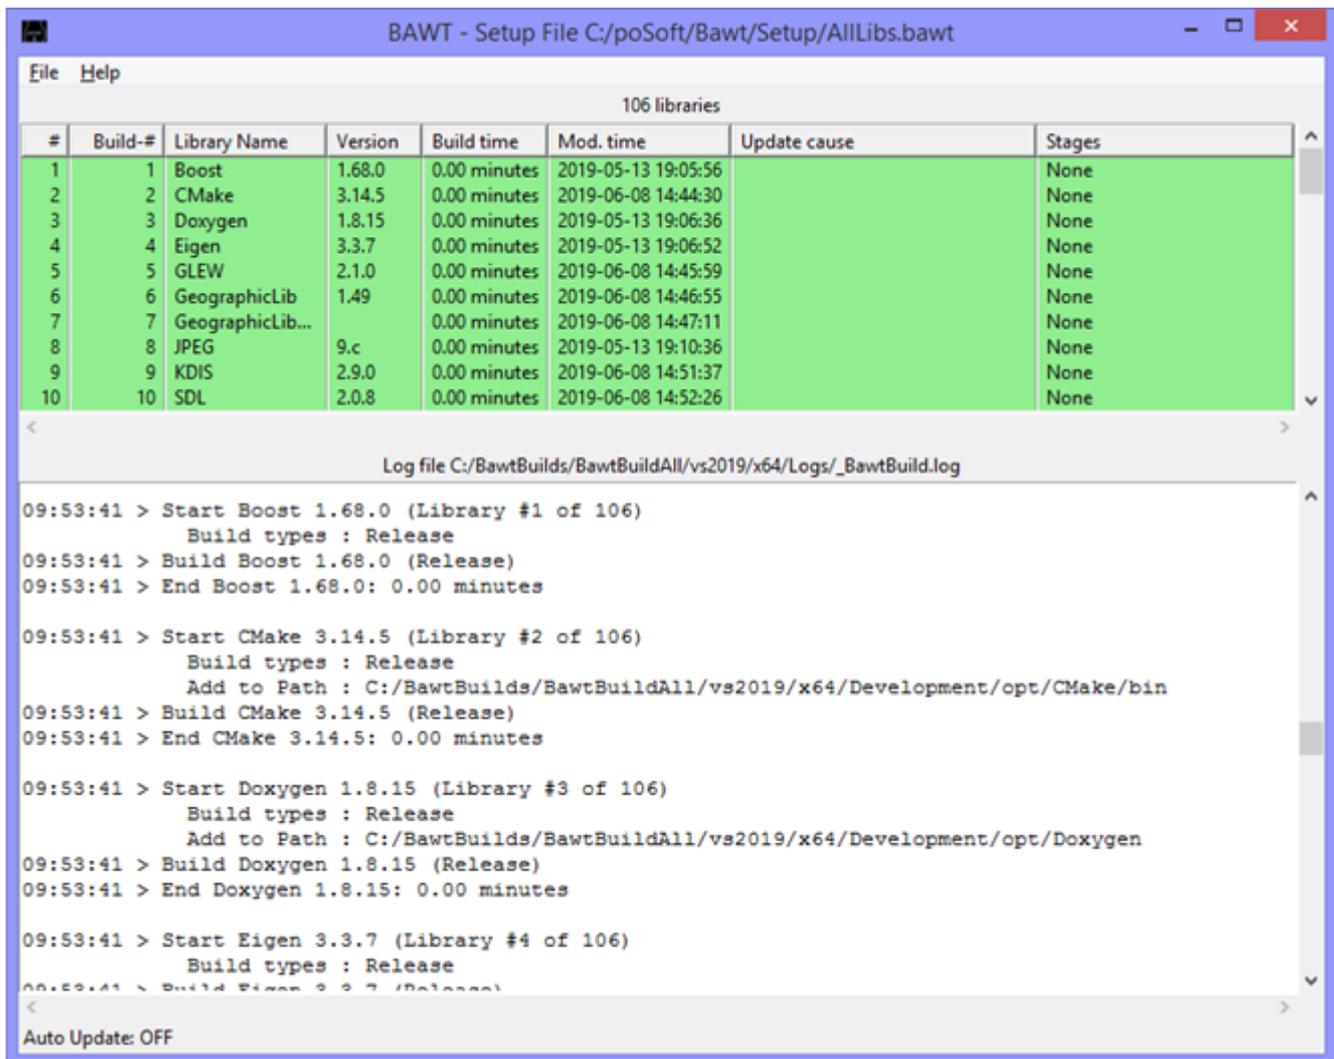

## 5.1.2 Compiler selection on Windows

On Linux and Darwin only the gcc compiler suite is supported.

On Windows gcc and Visual Studio are supported. Some packages can be compiled only with gcc or only with Visual Studio. More and more libraries can be compiled with either gcc or Visual Studio.

Starting with version 2.0, **BAWT** supports the notion of primary and secondary compilers on Windows. Which compilers are supported by a build script is indicated with BAWT procedure *SetWinCompilers*.

```

proc Init_tkdnd { libName libVersion } {
    SetScriptAuthor    $libName "Paul Obermeier" "obermeier@tcl3d.org"
    SetLibHomepage     $libName "https://github.com/petasis/tkdnd"
    SetLibDependencies $libName "CMake" "Tk"
    SetPlatforms       $libName "All"
    SetWinCompilers    $libName "gcc" "vs"
}
  
```

The above call of *SetWinCompilers* indicates, that the library can be compiled by both Visual Studio and gcc.

To see, which Windows compilers are supported, use the `--wincompilers` command line option or look for that information in the corresponding build files.

To determine, which compiler should be used in an actual compilation, there is the possibility to specify the compiler using command line option `--compiler`.

This option has been extended to not only accept `gcc` or `vs20XX` as arguments, but also a combination of both using a plus sign as separator, ex. `gcc+vs2019`.

If a library does not support the Windows compiler selected when calling BAWT, then that library is excluded from the build. The log file contains a message like the following:

```
15:02:30 > Start Boost 1.58.0 (Library #2 of 137)
      Build types : Release
15:02:30 > End Boost: Excluded from build (Compiler gcc not supported)
```

**Behaviour before BAWT version 2.0:**

If the chosen Windows compiler is Visual Studio, but the package only supports `gcc`, the `gcc` compiler was automatically chosen as secondary compiler, as the MSYS/MinGW suite is part of BAWT and therefore always available. The other way is not supported, as a Visual Studio compiler may not be available.

The following 3 options of choosing a compiler on Windows were available up to BAWT version 1.3.0.

BAWT 1.3.0	Command line option <code>--compiler</code>	SetWinCompilers		
		gcc	vs	gcc vs
Option 1	Not specified	gcc	Excluded	gcc
Option 2	<code>--compiler gcc</code>	gcc	Excluded	gcc
Option 3	<code>--compiler vs20XX</code>	gcc	vs	vs

**Behaviour since BAWT version 2.0:**

With BAWT 2.0 two new options have been added, which specify the primary and secondary compiler.

BAWT 2.0.0	Command line option <code>--compiler</code>	SetWinCompilers		
		gcc	vs	gcc vs
Option 1	Not specified	gcc	Excluded	gcc
Option 2	<code>--compiler gcc</code>	gcc	Excluded	gcc
Option 3	<code>--compiler vs20XX</code>	Excluded	vs	vs
Option 4	<code>--compiler gcc+vs20XX</code>	gcc	vs	gcc
Option 5	<code>--compiler vs20XX+gcc</code>	gcc	vs	vs

Options 1 and 2 work the same way as they did in BAWT versions before 2.0. Option 3 now does not compile packages supporting only `gcc`. This behaviour can now be achieved by specifying Option 4 (`vs20XX+gcc`).

To support this new functionality, several incompatible changes had to be implemented:

New procedures	Removed procedures
<code>SetCompilerVersions</code>	<code>GetVSCompilerVersionNumber</code>
<code>GetCompilerVersions</code>	<code>IsVSCompilerNewer</code>
<code>UseVisualStudio</code>	<code>IsVSCompiler</code>
<code>GetVisualStudioVersion</code>	<code>SetForceVSCompiler</code>
<code>NeedDll2Lib</code>	<code>ForceVSCompiler</code>

Procedure `GetCompilerVersion` now has a changed and extended signature.

Compilation of **Tcl/Tk** and all supported Tcl packages (everything included in `Setup` files `Tcl_Basic.bawt` and `Tcl_Extended.bawt`) is possible without using Visual Studio with the exception of building Visual

Studio compatible Tcl and Tk stub libraries. Those stub libraries can only be compiled using Visual Studio.

To generate Visual Studio compatible Tcl and Tk import libraries (\*.lib) the **BAWT** procedure `Dll2Lib` is used. It creates the import library from the DLL by using the **link.exe** program, which is part of Visual Studio.

If Visual Studio is not available, a warning message like the following is issued:

```
Warning > Dll2Lib tk86.lib: Creating import libraries needs VisualStudio
```

To avoid these warnings, add command line option `--noimportlibs`, if Visual Studio is not available or import libraries are not needed.

### 5.1.3 Online updates of libraries

If using the online update functionality, it is recommended that the local BAWT version is identical to the remote version on the BAWT server. If the local major or minor version is older than the remote version, a fatal error is generated:

```
FATAL > Remote major version 2.0.0 different to major local version 1.3.0
```

If only the patch version differs, a warning is issued.

You are able to download with different local and remote versions by specifying the `--noexit` command line option, but this is not recommended.

To have a consistent set of library versions or if using **BAWT** on a computer without internet connection, use the command line option `--noonline` to avoid checking for updates and automatic downloading of new libraries.

### 5.1.4 Use the generated libraries

To use the generated libraries, the following possibilities exist:

1. Manually copy the appropriate directory.
2. Use the `Finalize` procedure.
3. Create a software distribution setup file

#### **Manually copy the appropriate directories**

Copy the appropriate directories from either the *Distribution* or *Development* directory to a suitable location on your computer.

For example, after executing the Setup file `Tcl_Basic.bawt` to generate a **Tcl** distribution for Windows, copy output directory `Development\opt\Tcl` to `C:\Tcl` and set the environment variables `PATH` and `TCLLIBPATH`.

*Note, that the entries of the `PATH` variable on Windows are separated by semicolons (;). The entries of variable `TCLLIBPATH` are separated by spaces and directory paths must use slashes (/) instead of backslashes (\).*

*On Unix the environment variables are typically set in the shell resource file, ex. `.bashrc`:*

#### **Use the Finalize procedure**

Instead of doing the copy manually, it is easier and faster to do the copying in the Finalize stage. The **BAWT** framework contains a template Finalize file `Setup/UserFinalize.bawt`, which is shown below.

Adapt the installation paths according to your local needs.

```
# Example script for user supplied Finalize procedure.
#
# The procedure copies the generated Tcl distribution
# from the Development folder into a folder specified
# in your Path environment variable.
#
# You have to adapt the installation paths (tclRootDir)
# according to your needs.
#
# To execute the Finalize procedure, the name of this file
# must be specified on the BAWT command line with option
# "--finalizefile".

proc Finalize {} {
    Log "Finalize (User defined)"

    # For safety reasons this is just a dummy mode.
    # Remove the next lines to enable functionality.
    if { 1 } {
        Log "Finalize Dummy mode" 2 false
        return
    }

    if { [IsWindows] } {
        set tclRootDir "C:/opt"
    } elseif { [IsLinux] } {
        set tclRootDir "~/opt"
    } elseif { [IsDarwin] } {
        set tclRootDir "~/opt"
    } else {
        ErrorAppend "Finalize: Cannot determine operating system" "FATAL"
    }

    set tclInstDir [file join $tclRootDir "Tcl"]

    Log "Installing Tcl into $tclInstDir" 2 false
    DirDelete $tclInstDir

    MultiFileCopy [file join [GetOutputDevDir] [GetTclDir]] $tclInstDir "*" true
}
```

### Create a software distribution setup file

There are currently two *Build* files to create software distribution setup files:

- *SetupTcl.bawt* to create a **Tcl** Batteries-Included software distribution
- *SetupOsg.bawt* to create an **OpenSceneGraph** software distribution

These scripts take all contents of the *Release/Distribution* directory and create a software distribution setup file. This setup file is created with **InnoSetup** for Windows platforms and as a simple, self-extracting shell script for Unix platforms.

The software distribution setup file itself is generated in the *Release/Distribution* directory.


The software distribution setup file name for **Tcl/Tk** has the Tcl version, the architecture and the BAWT version used to build the distribution encoded into the file name.

Example: SetupTcl-BI-8.6.12-x64\_Bawt-2.3.1.exe

The software distribution setup file name for **OpenSceneGraph** has the OSG version, the compiler version, the architecture and the BAWT version used to build the distribution encoded into the file name. Example: `SetupOsg-3.4.1-vs2013-x64_Bawt-2.3.1.exe`

In the same directory as the distribution setup files, text files named `SetupTcl-8.6.12.txt` resp. `SetupOsg-3.4.1.txt` are created, which list the contents of the software distribution setup file.

This list is used to display the contents of the **InnoSetup** based distribution setup file, see the following screenshot for an example.

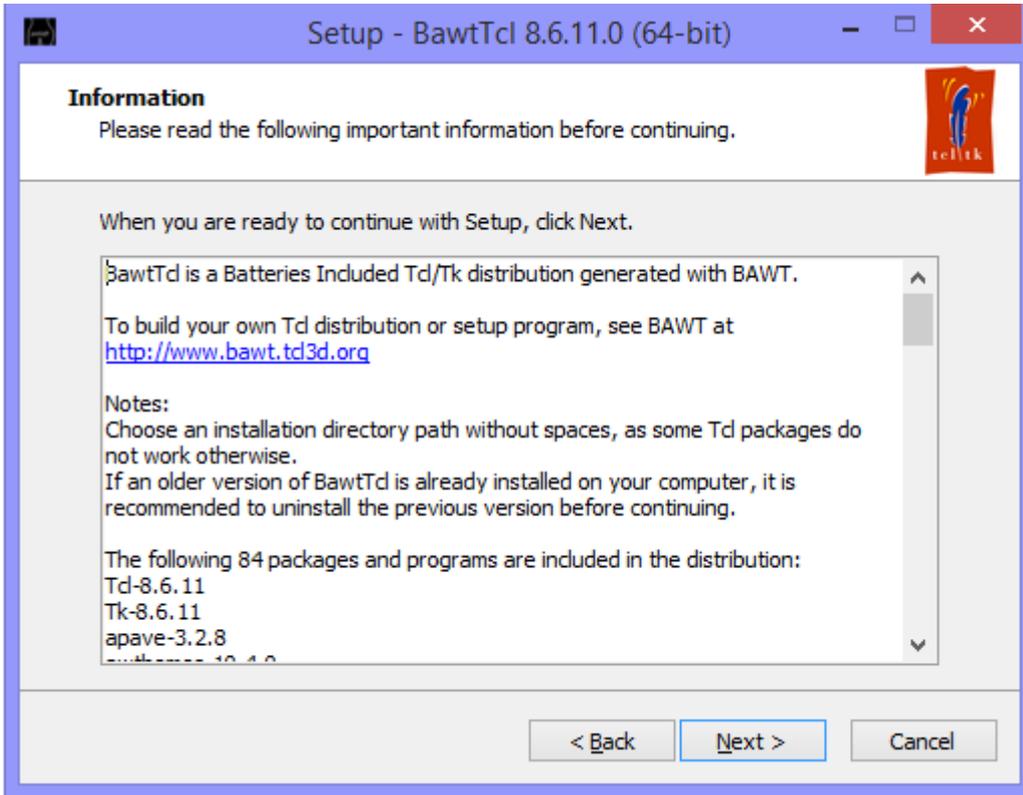

For Unix (Linux and Darwin) a simple shell script-based distribution setup file is generated. If called without arguments, a simple usage message is displayed.

```
> ./SetupTcl-BI-8.6.12-x64_Bawt-2.3.1.sh

Usage: SetupTcl-BI-8.6.12-x64_Bawt-2.3.1.sh InstallationDirectory
Install folder Tcl into specified installation directory
```

If called with a not existing installation directory path, an error message is printed onto standard output.

```
> ./SetupTcl-BI-8.6.12-x64_Bawt-2.3.1.sh asdf

Installation directory asdf does not exist.
Check name or create manually.
```

If called with a valid installation directory, the contents are extracted into that directory and a message on how to set the needed environment variables is printed onto standard output.

```
> ./SetupTcl-BI-8.6.12-x64_Bawt-2.3.1.sh ~/bin
Extracting Tcl into /home/obermeier/bin ...

Add the following lines to your shell resource file (ex. ~/.bashrc):
```

```
export PATH="/home/obermeier/bin/Tcl/bin:$PATH"
export TCLLIBPATH="/home/obermeier/bin/Tcl/lib $TCLLIBPATH"
```

## 5.1.5 Change icons of executables

To change the icon of the generated `tclkits` and `starpacks` as well as the information shown about an executable on Windows (Resource), two command line options exist in the **BAWT** framework:

- [--iconfile](#)
- [--resourcefile](#)

*The user supplied icon and resource files can be either located in the Resources directory. Then it is sufficient to just specify the name of the files. If the files are located at other places, the path name of the files must be absolute.*

Use the icon file `poSoft.ico` and resource file `poSoft.rc` supplied by **BAWT** in directory `Resources` as starting point for your adapted ones.

If specifying your own resource file, do not change the name of the icon file in the following line of your resource file:

```
tk ICON DISCARDABLE "tclkit.ico"
```

The name must always be `tclkit.ico`.

If specifying a user supplied icon file with command line option `--iconfile`, the icon file will be copied into the build directory `Tclkit/kbskit/win` and renamed to `tclkit.ico`, so that it is possible to only specify an icon file without specifying a resource file.

*Changes to the used icon and resource file are not considered by the BAWT update check process, so if using these options, it is necessary to at least rebuild package `tclkit` and its dependencies.*

## 5.1.6 Parallel builds

All build environments used by BAWT support parallel compilation. The number of parallel build jobs can be specified globally for all libraries with command line option `--numjobs`.

Alternatively, the number of parallel build jobs can be restricted for specific libraries as additional parameter `MaxParallel` in the Setup procedure. See chapter [3.2 Setup Files](#) for a description of the Setup procedure and its parameters.

The following libraries consistently produce deadlocks when executed in parallel, so the number of parallel jobs is already limited in the corresponding BAWT Setup files by specifying option `MaxParallel=Windows-gcc:1`.

- CERTI
- PNG
- osgcal
- tserialport

Other libraries which occasionally tend to deadlock are the following:

- freeglut
- gdal
- geos
- openjpeg

- OpenSceneGraph
- osgearth
- SDL

*Deadlocks have occurred until now only on Windows using the gcc compiler.*

As reference point, the next table shows typical build times on my laptop for libraries needing 2 minutes or more. The laptop is equipped with an Intel QuadCore i7-4700 2.4Ghz with HyperThreading. 8 parallel compile jobs have been used.

Estimated build time	Libraries
~ 2 minutes	ccl libgd libwebp SetupTcl xz
~ 3 minutes	geos kdis TIFF
~ 4 minutes	SWIG tcltcl tcl3dFull
~ 5 minutes	gdal Tclkit Xerces
~ 6 minutes	curl gdal libressl Tcl
~ 7 minutes	boost ffmpeg Img
~ 9 minutes	fftw
~ 25 minutes	osgearth
~ 35 minutes	OpenSceneGraph

## 5.2 Developer Perspective

### 5.2.1 Upgrade a library

If you want to use a new version of a library already supported by **BAWT**, chances are high, that the existing build scripts still work with the new version.

So just pack the sources of the new version into a 7z file and edit the corresponding entry in the *Setup* file. Also check the comments of the library build script regarding manual changes to the source code.

If the library is a **Tcl** package, you might get warnings from the **Starpack** build scripts. This indicates, that you will have 2 different versions in the **Tcl** library directory, which might lead to troubles.

The following warnings are issued, when upgrading library tablelist 6.10 to tablelist 6.11:

```
MakeStarpack: Found more than 1 package with prefix tablelist*:
  TclBasic-8.6.12/vs2013/x64/Development/opt/Tcl/lib/tablelist6.10
  TclBasic-8.6.12/vs2013/x64/Development/opt/Tcl/lib/tablelist6.11
```

So, when upgrading one or more libraries, you should either remove the development and distribution directories and do a fresh rebuild. The other possibility is to search for the directories of the old version (*tablelist6.10* in the above example) and just remove these directories from the development and distribution directory.


Another option is to use command line option [--noversion](#), which strips the version number from the names of Tcl package directories.

### 5.2.2 Add a library

Library sources should be specified either as a directory named *\$libName-\$libVersion* or as a compressed file named *\$libName-\$libVersion.7z*.

*libName must not contain a “-“ character, because this character is used to separate the library name from the version string.*

It is easily possible to extend the libraries compiled by **BAWT** with COTS software, ex. company specific libraries. One possibility is to just add these libraries into the *InputLibs* directory of the standard **BAWT** distribution. The better solution is to create a separate directory (ex. *BawtMine*), which holds your libraries in a similar structure like **BAWT** does. In this directory you create adapted versions of the batch scripts (ex. *MyBuild-Windows.bat*) and add *Setup* files, which reference your libraries as well as libraries of the standard BAWT distribution.

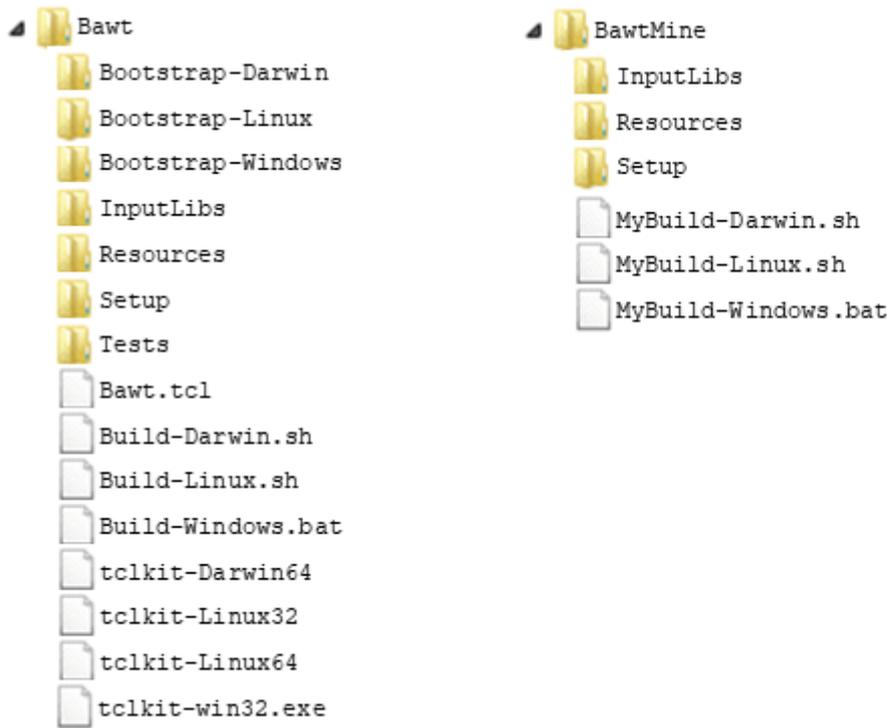

If you want to use a library, which is currently under development, it is possible to add the directory containing the local checkout of the library.

The following example shows the *Setup* file *mawtSvn.bawt* used to compile the current version of **MAWT** from my local SVN checkout.

```

Include "Tools.bawt"
Include "BasicLibs.bawt"
Include "Tcl_Basic.bawt"

if { [IsWindows] } {
    set dirName C:/poSoft/Mawt
} elseif { [IsLinux] } {
    set dirName /home/obermeier/poSoft/Mawt
} else {
    set dirName /Users/obermeier/poSoft/Mawt
}
Setup mawt $dirName mawt.bawt Version=0.4.0
    
```

*Note, that the checkout directory typically has no version number in it, so the version number is specified as optional argument of the Setup procedure.*

### 5.2.3 Add a Tcl program

Adding a Tcl program is similar to adding a library, i.e. the sources must be supplied as a compressed file as well as a corresponding *Build* script.

The Tcl program will be created as a starpack, i.e. a standalone executable containing the Tcl interpreter (tclkit), the program scripts as well as needed Tcl packages.

To ease the generation of starpacks, the BAWT framework offers procedures *MakeStarpackTcl* and *MakeStarpackTk* for this purpose. Use *MakeStarpackTcl*, if you want to create a console program, and *MakeStarpackTk*, if you want to create a program with a graphical Tk user interface.

```
proc MakeStarpackTcl { appScript appName starpackName buildDir args }
```

<i>appScript</i>	Full path to the startup script of the Tcl program.
<i>appName</i>	The name of the application. Typically <code>\$libName</code> .
<i>starpackName</i>	The name of the starpack executable. Typically <code>\$libName[GetExeSuffix]</code> .
<i>buildDir</i>	The name of the output directory. Typically <code>\$instDir</code> .
<i>args</i>	A list of files and directories to be included in the starpack. The path names of the files and directories must be absolute paths. The files of the Tcl program are typically located in <code>\$buildDir</code> . Needed Tcl packages are located in <code>[GetDevTclLibDir]</code> .

Example Build files using these procedures are:

- *BawtLogViewer.bawt*
- *gorilla.bawt*
- *poApps.bawt*
- *tclsg.bawt*
- *tksqlite.bawt*

*The signature of procedure `MakeStarpackTk` is identical to procedure `MakeStarpackTcl`.*

*A starpack on Darwin is a directory using the extension `.app`.*

### 5.2.4 Manually compile a library

To configure and compile a library, the **BAWT** framework uses shell (`*.sh`) or batch files (`*.bat`). These batch files are created in the *Configure* and *Compile* phases and stored in the *Build* directory (or a suitable subdirectory like eg. *win*) of the library.

You can use these batch files to configure or compile a library manually. This is especially useful while developing the build file for a new **BAWT** library.

*Before running one of the shell or batch files on the command line, you have to remove the last line of the script containing the `exit` command or replace the `exit` command with an `echo` command.*

*You can easily open a library specific DOS or MSys shell window via the context menu of the *BawtLogViewer*, see chapter 6.1 Graphical Log Viewer.*

The first part of the file name defines the configure and compile environment and corresponds to the general **BAWT** procedures for executing commands with the same name:

*\_Bawt\_DosRun:*

- The commands will be executed in a standard Windows command line environment.
- If running the command manually on Windows, it must be executed from a DOS command shell.
- Example: `> _Bawt_DosRun_CMakeBuild.bat`

*\_Bawt\_MSysRun:*

- The commands will be executed in the MSYS/MinGW environment or a standard shell environment on Unix systems.

- If running the command manually on Windows, it must be executed from a MSYS/MinGW shell.
- Note, that on Unix systems all files are prefixed with `_Bawt_MSys`.
- Example: `> sh _Bawt_MSysRun_MSysBuild.bat`

The second part specifies the caller of the `DosRun` or `MSysRun` command. This is typically one of the following standard BAWT procedures:

- `NMakeBuild`
- `MsBuild`
- `CMakeConfig`
- `CMakeBuild`
- `MSysConfig`
- `TeaConfig`
- `MSysBuild`

For libraries, which cannot be built with one of the above standard procedures, it is common usage to specify the caller in the form:

- `_Bawt_LibName_Configure`
- `_Bawt_LibName_Compile`

One example is the Boost library, which has special configure and compile commands:

- `_Bawt_DosRun_Boost_Configure.bat`
- `_Bawt_DosRun_Boost_Compile.bat`

When using `NMakeBuild` or `MsBuild`, there is no need to specify commands for the configuration phase.

- `_Bawt_DosRun_MsBuild.bat`
- `_Bawt_DosRun_NMakeBuild.bat`

All other commands typically come in pairs, so you will see the following combination of configure and compile batch scripts:

- `_Bawt_DosRun_CMakeConfig.bat`
- `_Bawt_DosRun_CMakeBuild.bat`
  
- `_Bawt_MSysRun_TeaConfig.bat`
- `_Bawt_MSysRun_MSysBuild.bat`
  
- `_Bawt_MSysRun_MSysConfig.bat`
- `_Bawt_MSysRun_MSysBuild.bat`
  
- `_Bawt_MSysRun_CMakeBuild.bat`
- `_Bawt_MSysRun_CMakeConfig.bat`

## 5.3 Known issues

### 5.3.1 Build deadlock

**Problem:**

The build process does not continue with specific libraries.

**Workaround or solution:**

This is due to errors in the build infrastructure of the corresponding library in conjunction with parallel builds. See chapter [5.1.6 Parallel builds](#) for details.

### 5.3.2 BawtLogViewer shows incorrect build time

**Problem:**

If the build of a library starts before midnight and extends over midnight, the build time of this package will be negative in the BawtLogViewer table display, as the log file only stores time values as HH:MM:SS.

**Workaround or solution:**

None.

### 5.3.3 Package SWIG

**Problem:**

SWIG build fails occasionally on Windows due to problems renaming files. This behavior was noticed on systems running Sophos AntiVirus only.

**Workaround or solution:**

No real solution, other than retrying the build until it succeeds.

### 5.3.4 Package Trf

**Problem:**

The CRC module of Tcl package `Trf` crashes when compiled in x86 mode on Windows.

**Workaround or solution:**

None.

### 5.3.5 Package tcllib/crc32

**Problem:**

The `crc32` module of Tcl package `tcllib` crashes when compiled in x86 mode on Windows.

**Workaround or solution:**

The crash is not the fault of module `crc32` itself, but of the CRC module of package `Trf`, which gets called, if the `Trf` extension is available.

Either remove package `Trf` or remove loading of accelerator `trf` in file `crc32.tcl`

```
foreach e {trf critcl} {
    if {[LoadAccelerator $e]} break
}
```

## 5.4 Tips and Tricks

### 5.4.1 Tips for Windows

**Check generated library**

To check the architecture of a generated dynamic library, execute the following command in a Visual Studio developer command prompt:

```
> dumpbin /headers XXX.dll | more
```

The architecture of the library is contained in the file header section of the output:

```
FILE HEADER VALUES
```

machine (x64)

## 5.4.2 Tips for Linux

### Check generated library

To check, if a library has been stripped, the commands `nm` or `file` can be used. To check the architecture of a generated library, the command `file` can be used.

A library built for Release should have no symbols and thus should generate the following outputs:

```
> nm libjpeg.so.9.1.0
nm: libjpeg.so.9.1.0: no symbols

> file libjpeg.so.9.1.0
libjpeg.so.9.1.0: ELF 32-bit LSB shared object, Intel 80386, version 1 (SYSV),
dynamically linked, stripped
```

A Debug build should have symbols and thus should generate the following outputs:

```
> nm libjpeg.so.9.1.0 | more
0002ffa0 r aanscalefactor.4133
0002fa60 r aanscalefactor.4178
0002ffe0 r aanscales.4125

> file libjpeg.so.9.1.0
libjpeg.so.9.1.0: ELF 32-bit LSB shared object, Intel 80386, version 1 (SYSV),
dynamically linked, not stripped
```

## 5.5 Advanced Batch Scripts

This section contains the batch scripts, which are used to generate the **Tcl-Pure** (minimal Tcl/Tk distribution) as well as the **Tcl-BI** (Batteries Included Tcl/Tk distribution) distributions.

### 5.5.1 Build Tcl-Pure distributions

The following batch scripts are used to create the **Tcl-Pure** distributions for all supported Tcl versions. A separate directory (`C:/BawtBuilds/TclMinimal/TclMinimal-%TCLVERS%`) is created for each Tcl version containing both the x86 and x64 versions.

The needed MSYS/MinGW versions are located in directory `C:/BawtBuildTools` (using option `--toolsdir`) to avoid extracting these for each Tcl version.

#### Batch script `UpdateTclMinimal.bat`

```
@echo off
setlocal

rem Architecture, TclVersion, TclString and Finalize flag are mandatory parameters
if "%1" == "" goto ERROR
if "%2" == "" goto ERROR
if "%3" == "" goto ERROR
if "%4" == "" goto ERROR

set ARCH=%1
set TCLVERS=%2
set TCLSTRING=%3
set FINALIZE=%4
shift
```

```

shift
shift
shift

rem If no target is given, use target "all".
if "%1"==" " goto BUILDALL

rem Loop through the rest of the parameter list for targets.
set TARGETS=
:PARAMLOOP
rem There is a trailing space in the next line. It's there for formatting.
set TARGETS=%TARGETS% %1
shift
if not "%1"==" " goto PARAMLOOP
goto BUILD

:BUILDALL
set TARGETS=all

:BUILD

set BAWTROOT=..\Bawt
set SETUPFILE=%BAWTROOT%\Setup\Tcl_MinimalDist.bawt
set FINALIZEFILE=Setup\UserFinalize.bawt
set OUTROOTDIR=C:/BawtBuilds/TclMinimal/TclMinimal-%TCLVERS%
set TOOLSDIR=C:/BawtBuildTools
set TCLKIT=%BAWTROOT%\tclkit-win32.exe
set NUMJOBS=%NUMBER_OF_PROCESSORS%
set ACTION=--update

set BAWTOPTS=--rootdir %OUTROOTDIR% ^
             --toolsdir %TOOLSDIR% ^
             --architecture %ARCH% ^
             --compiler gcc+vs2019 ^
             --numjobs %NUMJOBS% ^
             --noonline ^
             --nouserbuilds ^
             --iconfile poSoft.ico ^
             --resourcefile poSoft.rc ^
             --certfile poSoft.cer ^
             --tclversion %TCLVERS% ^
             --copt SetupTcl "Version=%TCLSTRING%"

set FINALIZEOPT=--logviewer
if "%FINALIZE%"=="0" goto NOFINALIZE
set FINALIZEOPT=--finalizefile %FINALIZEFILE%
:NOFINALIZE

rem Build all libraries as listed in build configuration file.
CALL %TCLKIT% %BAWTROOT%\Bawt.tcl %USEGCC% %BAWTOPTS% %FINALIZEOPT% %ACTION% %SETUPFILE%
%TARGETS%

goto EOF

:ERROR
echo.
echo Usage: %0 Architecture TclVersion TclString UseFinalizeScript [Target1] [TargetN]
echo Architecture      : x86 x64
echo TclVersion         : 8.6.12 8.6.13 8.7.a5
echo TclString          : 8.6.12.0 8.6.13.0 8.7.0.5
echo UseFinalizeScript: 0 1
echo Default target    : all
echo.

:EOF

```

You might need to adapt the pathes specified in `OUTROOTDIR` and `TOOLS DIR` as well as the used Visual Studio version specified in command line option `--compiler`.

#### Batch script `UpdateTclMinimals.bat`

```
@echo off
setlocal

REM Architecture TclVersion TclString UseFinalizeScript

CALL UpdateTclMinimal x64 8.6.12 8.6.12.0 0
CALL UpdateTclMinimal x64 8.6.13 8.6.13.0 0
CALL UpdateTclMinimal x64 8.7.a5 8.7.0.5 0

CALL UpdateTclMinimal x86 8.6.12 8.6.12.0 0
CALL UpdateTclMinimal x86 8.6.13 8.6.13.0 0
CALL UpdateTclMinimal x86 8.7.a5 8.7.0.5 0
```

## 5.5.2 Build Tcl-BI distributions

The following batch scripts are used to create the **Tcl-BI** distributions for all supported Tcl versions. A separate directory (`C:/BawtBuilds/TclDistribution/TclDistribution-%TCLVERS%`) is created for each Tcl version containing both the x86 and x64 versions.

The needed MSYS/MinGW versions are located in directory `C:/BawtBuildTools` (using option `--toolsdir`) to avoid extracting these for each Tcl version.

#### Batch script `UpdateTclDistribution.bat`

```
@echo off
setlocal

rem Architecture, TclVersion, TclString and Finalize flag are mandatory parameters
if "%1" == "" goto ERROR
if "%2" == "" goto ERROR
if "%3" == "" goto ERROR
if "%4" == "" goto ERROR

set ARCH=%1
set TCLVERS=%2
set TCLSTRING=%3
set FINALIZE=%4
shift
shift
shift
shift

rem If no target is given, use target "all".
if "%1"==" " goto BUILDALL

rem Loop through the rest of the parameter list for targets.
set TARGETS=
:PARAMLOOP
rem There is a trailing space in the next line. It's there for formatting.
set TARGETS=%TARGETS% %1
shift
if not "%1"==" " goto PARAMLOOP
goto BUILD

:BUILDALL
set TARGETS=all

:BUILD
```

```

set BAWTROOT=..\Bawt
set SETUPFILE=%BAWTROOT%\Setup\Tcl_Distribution.bawt
set FINALIZEFILE=Setup\UserFinalize.bawt
set OUTROOTDIR=C:/BawtBuilds/TclDistribution/TclDistribution-%TCLVERS%
set TOOLSDIR=C:/BawtBuildTools
set TCLKIT=%BAWTROOT%\tclkit-win32.exe
set NUMJOBS=%NUMBER_OF_PROCESSORS%
set ACTION=--update

set BAWTOPTS=--rootdir %OUTROOTDIR% ^
             --toolsdir %TOOLSDIR% ^
             --architecture %ARCH% ^
             --compiler gcc+vs2019 ^
             --numjobs %NUMJOBS% ^
             --noonline ^
             --nouserbuilds ^
             --iconfile poSoft.ico ^
             --resourcefile poSoft.rc ^
             --certfile poSoft.cer ^
             --tclversion %TCLVERS% ^
             --copt SetupTcl "Tag=-BI" ^
             --copt SetupTcl "Version=%TCLSTRING%"

set FINALIZEOPT=--logviewer
if "%FINALIZE%"=="0" goto NOFINALIZE
set FINALIZEOPT=--finalizefile %FINALIZEFILE%
:NOFINALIZE

rem Build all libraries as listed in build configuration file.
CALL %TCLKIT% %BAWTROOT%\Bawt.tcl %BAWTOPTS% %FINALIZEOPT% %ACTION% %SETUPFILE%
%TARGETS%

goto EOF

:ERROR
echo.
echo Usage: %0 Architecture TclVersion TclString UseFinalizeScript [Target1] [TargetN]
echo Architecture      : x86 x64
echo TclVersion         : 8.6.12 8.6.13 8.7.a5
echo TclString          : 8.6.12.0 8.6.13.0 8.7.0.5
echo UseFinalizeScript: 0 1
echo Default target    : all
echo.

:EOF

```

*You might need to adapt the pathes specified in `OUTROOTDIR` and `TOOLSDIR` as well as the used Visual Studio version specified in command line option `--compiler`.*

#### Batch script `UpdateTclDistributions.bat`

```

@echo off
setlocal

REM Architecture TclVersion TclString UseFinalizeScript

CALL UpdateTclDistribution x64 8.6.12 8.6.12.0 0
CALL UpdateTclDistribution x86 8.6.12 8.6.12.0 0

CALL UpdateTclDistribution x64 8.6.13 8.6.13.0 0
CALL UpdateTclDistribution x86 8.6.13 8.6.13.0 0

CALL UpdateTclDistribution x64 8.7.a5 8.7.0.5 0

```

[CALL](#) UpdateTclDistribution x86 8.7.a5 8.7.0.5 0

## 6 Logging

The *Logs* output directory contains the overall build log file *\_BawtBuild.log* as well as the library specific build log files.

Library specific log files contain the output of the configuration and compile process. They also contain the error messages, if the build of a library does not succeed.

The overall log file contains the messages, which are printed onto standard output during the BAWT build process. The amount of log messages can be set by specifying the log level with command line option [--loglevel](#). Level 0 does not produce any log messages, while level 4 produces lots of log messages. The default value for the log level is 3.

Each stage or executed command is prefixed with a time code like shown in the next line:

```
21:35:30 > Build tclcompiler 1.7.1 (Release)
```

If log files of different configurations should be compared, these time codes may be disturbing. BAWT therefore allows to remove the time codes from the log messages by specifying command line option [-nologtime](#).

When rerunning a build, existing log files are renamed by appending *.bak* to the corresponding files before creating the new log files.

To view the build process online in a graphical window, the command line option [--logviewer](#) can be specified. See the next chapter for a detailed description of the graphical log file viewer **BawtLogViewer**.

Logging functionality is realized in namespace `BawtLog`. The most important procedure is `Log`, which may be used in build scripts, too.

Command line options influencing logging:

[--loglevel](#)

[--nologtime](#)

[--logviewer](#)

### 6.1 Graphical Log Viewer

The **BawtLogViewer** is a separate program to view and analyse the log output of BAWT. It is a Tcl script, which is wrapped as a Starpack and is included as a Windows executable in directory *Bootstrap-Windows*. For other platforms it can be built with BAWT.

The graphical log viewer can either be used to analyse log files after a build process has finished (offline mode) or it can be used to interactively view the build process (online mode). Viewing the log messages online can be done by either using command line option [--logviewer](#) when starting the BAWT build process or by opening the log file *\_BawtBuild.log* anytime during the build process.

Log files can be opened by using the `File` menu or by dragging and dropping the icon of the log file onto the **BawtLogViewer** window.

The following figure shows the layout of the log viewer window, which has 2 main parts. In the upper part all libraries of the Setup file are listed in a scrollable table, while in the lower part the log messages of the build process are displayed in a scrollable text widget.

The screenshot shows the BAWT application window titled "BAWT - Setup file C:/poSoft/Bawt/Setup/Tcl\_Distribution.bawt". The main window contains a table with the following columns: #, Build-#, Library Name, Version, Compiler, Build time, Est. time, Mod. time, Update cause, and Stages. The table lists 17 libraries, with different background colors indicating their build status: green for successful builds, blue for excluded libraries, and yellow for libraries currently under build. Below the table is a log window showing the build process for Tkhtml 3.0 and Tktable 2.11.

#	Build-#	Library Name	Version	Compiler	Build time	Est. time	Mod. time	Update cause	Stages
7	7	SetupPython			0.00	2.39	2020-12-22 18:42:56		
8	8	Tcl	8.6.11	gcc	0.00	7.69	2020-12-31 14:10:04		
9	9	TclStubs	8.6.11	vs	0.00	1.99	2020-12-31 14:11:43		
10	10	Tcladdressbook	1.2.4					Excluded from build (Darwin only)	
11	11	Tclapplescript	2.2					Excluded from build (Darwin only)	
12	12	Tk	8.6.11	gcc	0.00	1.96	2021-01-11 18:33:55		
13	13	TkStubs	8.6.11	vs	0.00	0.62	2021-01-11 18:34:23		
14	14	Tkhtml	3.0	gcc	0.00	0.57	2021-01-11 18:34:54		
15	15	Tktable	2.11	gcc	0.33	0.58	2021-01-11 20:58:01	Build directory not existent	
16	16	ZLib	1.2.11	gcc		0.15	2020-12-22 18:56:11		

```

Log file C:/BawtBuilds/TclDistribution/TclDistribution-8.6.11/vs2019/x64/Logs/_BawtBuild.log
Build types : Release
20:58:01 > Build TkStubs 8.6.11 (Release)
20:58:01 > End TkStubs 8.6.11: 0.00 minutes

20:58:01 > Start Tkhtml 3.0 (Library #14 of 107)
Build types : Release
20:58:01 > Build Tkhtml 3.0 (Release)
20:58:01 > End Tkhtml 3.0: 0.00 minutes

20:58:01 > Start Tktable 2.11 (Library #15 of 107)
Build types : Release
Update cause: Build directory not existent
20:58:01 > Clean Tktable (Release)
DirDelete
Directory: C:/BawtBuilds/TclDistribution/TclDistribution-8.6.11/vs2019/x64/Release/Build/Tktable
DirDelete
Directory: C:/BawtBuilds/TclDistribution/TclDistribution-8.6.11/vs2019/x64/Release/Install/Tktable
20:58:01 > Build Tktable 2.11 (Release)
DirCreate
Directory: C:/BawtBuilds/TclDistribution/TclDistribution-8.6.11/vs2019/x64/Release/Build/Tktable
DirCreate
Directory: C:/BawtBuilds/TclDistribution/TclDistribution-8.6.11/vs2019/x64/Release/Install/Tktable
20:58:01 >
Auto Update: ON (Library Tktable running since 0.33 minutes. Estimated build time 0.58 minutes)
    
```

Different row background colors indicate the build status of a library. A green background indicates a successful build of a library, a blue background indicates an excluded library, a yellow background shows the library currently under build and an orange background indicates a library, where the current build time is greater than the estimated build time. See below for an explanation of estimated build times for deadlock detection.

A red text color is displayed for libraries which issued a warning during the build process.

The table can be sorted by any of the columns except the first one, which just shows the row number. For example, you may want to view the libraries sorted by library names instead of the build number. Selecting a table row scrolls to the beginning of the corresponding section in the text widget. The section is also marked with a yellow background.

By double clicking onto a table row, a simple editor window is opened showing the contents of the library specific build log file, see next figure for an example. Your favourite editor may be specified by setting the environment variable EDITOR.

```

C:/BawtBuilds/BawtBuildAll/vs2017/x64/Logs/GeographicLib.log
> Start Build_GeographicLib

C:\BawtBuilds\BawtBuildAll\vs2017\x64\Release\Build\GeographicLib>CALL "C:/Program Files (x86)
/Microsoft Visual Studio/2017/Community/VC/Auxiliary/Build/vcvarsall.bat" x86_amd64
*****
** Visual Studio 2017 Developer Command Prompt v15.9.12
** Copyright (c) 2017 Microsoft Corporation
*****
[vcvarsall.bat] Environment initialized for: 'x86_x64'
-- The C compiler identification is MSVC 19.16.27031.1
-- The CXX compiler identification is MSVC 19.16.27031.1
-- Check for working C compiler: C:/Program Files (x86)/Microsoft Visual Studio/2017/Community/V
C/Tools/MSVC/14.16.27023/bin/Hostx86/x64/cl.exe
-- Check for working C compiler: C:/Program Files (x86)/Microsoft Visual Studio/2017/Community/V
C/Tools/MSVC/14.16.27023/bin/Hostx86/x64/cl.exe -- works
-- Detecting C compiler ABI info
-- Detecting C compiler ABI info - done
-- Detecting C compile features
-- Detecting C compile features - done
-- Check for working CXX compiler: C:/Program Files (x86)/Microsoft Visual Studio/2017/Community
/VC/Tools/MSVC/14.16.27023/bin/Hostx86/x64/cl.exe
-- Check for working CXX compiler: C:/Program Files (x86)/Microsoft Visual Studio/2017/Community
/VC/Tools/MSVC/14.16.27023/bin/Hostx86/x64/cl.exe -- works

```


Pressing the right mouse button opens a context menu with the following functionalities:

- Open library specific directories in an Explorer window.
- Open library specific Log, Setup or Build file.
- Open library specific DOS or MSYS shell window.

Pressing a key while the table has focus, selects the next library, which has this key as its first letter. Pressing other keys within the *Key Repeat Time* extends the search string similar to the behaviour of the Windows Explorer. The *Key Repeat Time* can be specified in the *Settings* menu. Pressing the Return key selects the library currently under build.

Note the following features, which are only available in online mode:

- **BawtLogViewer** starts in *Auto Update* mode, where it reloads the log file every 3 seconds. The *Auto Update* mode is automatically switched off when the end of the build process is detected in the log file or it can be switched on or off by selecting the appropriate entry in the *File* menu.
- When reloading the log file, the table row order is always reset to the library build order.
- The accumulated time of the library currently being built is displayed in the status bar of the viewer window and in the corresponding table cell.
- Column Stages is not filled before the end of the build process, see next figure.

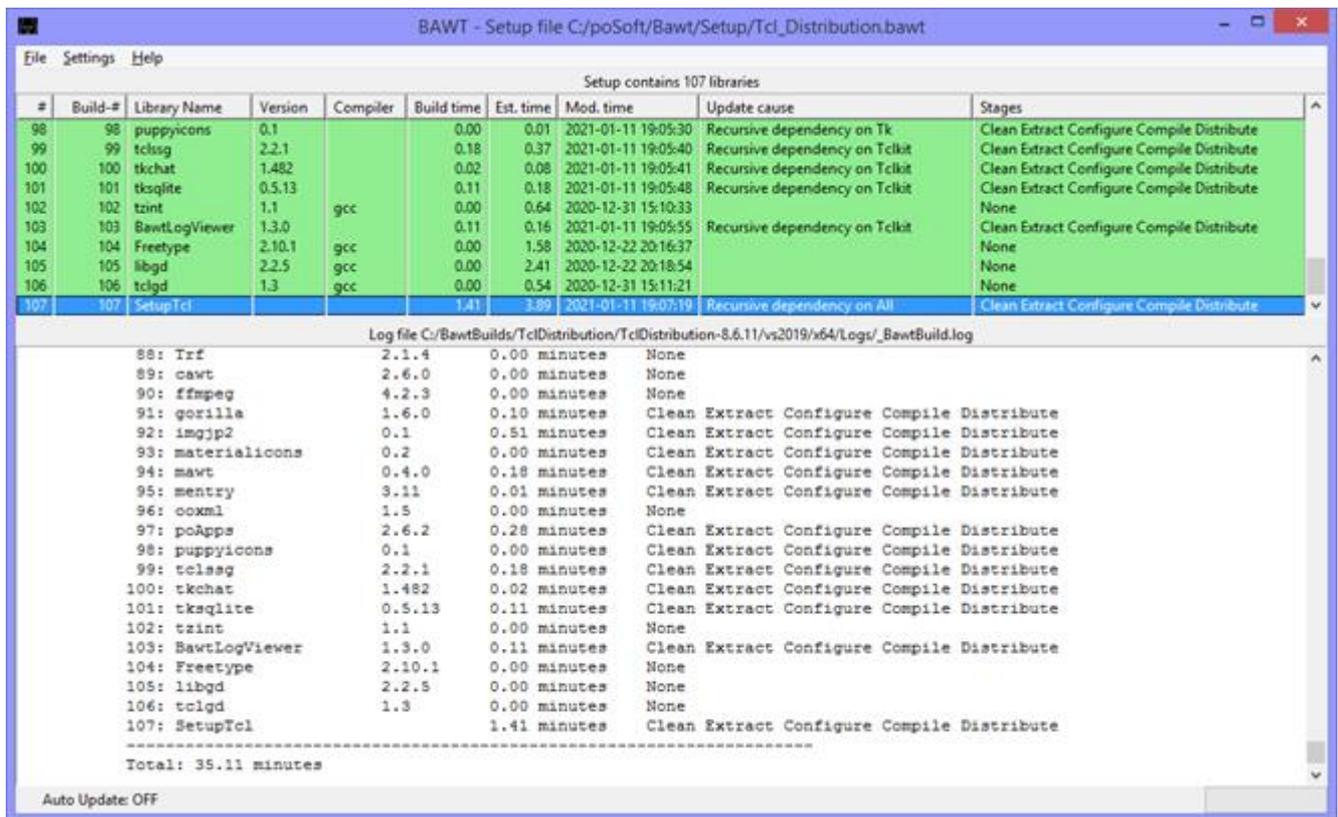

The program can be used to detect library build deadlocks by comparing the current build time against an estimated build time. To generate estimated build times, at least one BAWT build has to be performed. After loading the corresponding log files, the build times of this run can be saved in the settings file by selecting File menu entry Save build times.

These build times are then used as estimated build times in future BAWT builds to compare the current build time of a library against these estimated build times. If the current build time exceeds the estimated time by a specific threshold value (which can be specified in the Settings menu), both a visual warning (corresponding row background is set to orange) as well as an acoustic warning (beep) is issued. The acoustic warning can be disabled in the Settings menu.

Estimated build times, deadlock parameters and other values like window size and position are stored in the settings files `~/BawtLogViewer/BawtLogViewer.cfg`.

## 7 Command Line Options

Calling the **BAWT** framework script with command line option `--help` prints the following help message:

```
Usage: Bawt.tcl [Options] SetupFile LibraryName [LibraryNameN]
```

Start the BAWT automatic library build process.

When using "all" as library name, all libraries specified in the setup file are built.

It is also possible to specify the numbers of the libraries as printed by option "--list" or specify a range of numbers (ex: 2-5).

Note, that at least either a list or build action option must be specified.

### 7.1 General Options

Option	Description
<code>--help</code>	Print this help message and exit.
<code>--version</code>	Print BAWT version and copyright and exit. Use in combination with <code>--loglevel 0</code> to just print the version number.
<code>--procs</code>	Print all available procedures and exit.
<code>--proc &lt;string&gt;</code>	Print documentation of specified procedure and exit.
<code>--loglevel &lt;int&gt;</code>	Specify log message verbosity. Choices: 0 - 4. Default: 3.
<code>--nologtime</code>	Do not write time strings with log messages. Default: Write time strings. Use this option when comparing log files to have less differences.
<code>--logviewer</code>	Start graphical log viewer program <b>BawtLogViewer</b> . Only valid, if log level is greater than 1. Default: No.

### 7.2 List Action Options

Option	Description
<code>--list</code>	Print all available library names and versions and exit.
<code>--platforms</code>	Print library names, versions and supported platforms.
<code>--wincompilers</code>	Print library names, versions and supported Windows compilers.
<code>--authors</code>	Print library names, versions and script authors.
<code>--homepages</code>	Print library names, versions and homepages.
<code>--dependencies</code>	Print library names, versions and dependencies.
<code>--dependency</code>	Print dependencies of specified target libraries.

*The list action options may be accumulated to print several library informations at once.*

### 7.3 Build Action Options

Option	Description
<code>--clean</code>	Clean library specific build and install directories.
<code>--extract</code>	Extract library source from a ZIP file or a directory.
<code>--configure</code>	Perform the configure stage of the build process.
<code>--compile</code>	Perform the compile stage of the build process.
<code>--distribute</code>	Perform the distribution stage of the build process.
<code>--finalize</code>	Generate environment file and call user supplied Finalize procedure.

<code>--complete</code>	Perform the following stages in order: clean, extract, configure, compile, distribute, finalize.
<code>--update</code>	Perform necessary stages depending on modification times. Note: Global stage finalize is always executed.
<code>--simulate</code>	Simulate update action without actually building libraries.
<code>--touch</code>	Set modification times of library build directories to current time.

## 7.4 Build Configuration Options

Option	Description
<code>--architecture &lt;string&gt;</code>	Build for specified processor architecture. Choices: x86 x64. Default: Architecture of the calling tclkit or tclsh.
<code>--compiler &lt;string&gt;</code>	Build with specified compiler version. Choices: gcc vs2008 vs2010 vs2013 vs2015 vs2017 vs2019 vs2022. Specify primary and secondary compiler by adding a plus sign in between. Example: gcc+vs2013. Default: gcc.
<code>--gccversion &lt;string&gt;</code>	Build with specified MinGW gcc version. Windows only. Choices: 4.9.2 5.2.0 7.2.0 8.1.0 11.2.0. Default: 7.2.0.
<code>--msysversion &lt;string&gt;</code>	Build with specified MSYS version. Windows only. Choices: 1 2. Default: Version 2 if available, otherwise version 1.
<code>--tclversion &lt;string&gt;</code>	Build Tcl, Tk and Tclkit for specified version. Choices: 8.6.7 - 8.6.13, 8.7.a5. Default: 8.6.13.
<code>--tkversion &lt;string&gt;</code>	Build Tk and Tclkit for specified version. Choices: 8.6.7 - 8.6.13, 8.7.a5. Default: 8.6.13.
<code>--imgversion &lt;string&gt;</code>	Build Img for specified version. Choices: 1.4.9 1.4.10 1.4.11 1.4.13 1.4.14 1.5.0. Default: 1.4.14.
<code>--osgversion &lt;string&gt;</code>	Build OpenSceneGraph for specified version. Choices: 3.4.1 3.6.5. Default: 3.6.5.
<code>--buildtype &lt;string&gt;</code>	Use specified build type. Choices: Release Debug. Default: Release or as specified in setup file.
<code>--exclude &lt;lib&gt;</code>	Force exclusion of build for specified library name.
<code>--wincc &lt;lib&gt; &lt;string&gt;</code>	Use specified Windows compiler, if supported by build script. Choices: gcc vs.
<code>--sdk &lt;lib&gt; &lt;string&gt;</code>	Use specified Microsoft SDK version. To use the SDK version for all libraries, specify "all" as library name.
<code>--copt &lt;lib&gt; &lt;string&gt;</code>	Specify library specific user configuration option.
<code>--user &lt;lib&gt; &lt;string&gt;</code>	Specify library specific user build file.
<code>--url &lt;string&gt;</code>	Specify BAWT download server. Default: <a href="https://www.tcl3d.org/bawt/download">https://www.tcl3d.org/bawt/download</a>
<code>--toolsdir &lt;string&gt;</code>	Specify directory containing MSYS/MinGW. Default: [GetOutputToolsDir]
<code>--rootdir &lt;string&gt;</code>	Specify build output root directory. Default: [GetOutputRootDir]

<code>--libdir &lt;string&gt;</code>	Add a directory containing library source and build files. This option can be called multiple times and adds the new directory to the beginning of the directory list. Default search list: [file join [pwd] "InputLibs"] [file join [GetInputRootDir] "InputLibs"]
<code>--distdir &lt;string&gt;</code>	Specify distribution root directory. Default: [file join [GetOutputTypeDir] "Distribution"]
<code>--finalizefile &lt;string&gt;</code>	Specify file with user supplied Finalize procedure. Default: None.
<code>--sort &lt;string&gt;</code>	Sort libraries according to specified sorting mode. Choices: dependencies dictionary none. Default: dependencies
<code>--noversion</code>	Do not use version number for Tcl package directories. Default: Library name and version number.
<code>--noexit</code>	Do not exit build process after fatal error, but try to continue. Default: Exit build process after a fatal error.
<code>--noimportlibs</code>	Do not create import libraries on Windows. Default: Create import libraries. Needs VisualStudio.
<code>--noruntimelibs</code>	Do not copy VisualStudio runtime libraries. Default: Copy runtime libraries. Needs VisualStudio.
<code>--nostrip</code>	Do not strip libraries in distribution directory. Default: Strip libraries.
<code>--noonline</code>	Do not check or download from online repository. Default: Use <a href="https://www.tcl3d.org/bawt/download">https://www.tcl3d.org/bawt/download</a>
<code>--norecursive</code>	Do not check recursive dependencies. Default: Use recursive dependencies.
<code>--nosubdirs</code>	Do not create compiler and architecture sub directories. Default: Create compiler and architecture sub directories.
<code>--nouserbuilds</code>	Do not consider user build files. Default: Consider user build files named <i>LibraryName_User.bawt</i> .
<code>--iconfile &lt;string&gt;</code>	Use specified icon file for tclkits and starpacks. Default: Standard tclkit icon. Windows only.
<code>--resourcefile &lt;string&gt;</code>	Use specified resource file for tclkits and starpacks. Default: Standard tclkit resource file. Windows only.
<code>--certfile &lt;string&gt;</code>	Use specified certification file for code signing starpacks. Default: No code signing. Windows only.
<code>--timestampurl &lt;string&gt;</code>	Use specified timestamp server for code signing starpacks. Default: <a href="http://timestamp.comodoca.com/authenticode">http://timestamp.comodoca.com/authenticode</a> . Use empty string to add no timestamp. Windows only.
<code>--numjobs &lt;int&gt;</code>	Number of parallel compile jobs. Default: 1
<code>--timeout &lt;float&gt;</code>	Number of seconds to try renaming or deleting directories. Default: 30.0

## 8 Supported Libraries

### List of all libraries (using command line option `--platforms`)

#:	Name	Version	Platforms
1:	apave	3.4.8	Windows Linux Darwin
2:	awthemes	10.4.0	Windows Linux Darwin
3:	BawtLogViewer	2.3.1	Windows Linux Darwin
4:	Blender	3.0.0	Windows
5:	Boost	1.75.0	Windows Linux Darwin
6:	BWidget	1.9.16	Windows Linux Darwin
7:	Cal3D	0.120	Windows Linux
8:	Canvas3d	1.2.2	Windows Linux
9:	cawt	2.9.2	Windows
10:	ccl	4.0.6	Windows Linux
11:	CERTI	3.5.1	Windows Linux
12:	cfffi	1.2.0	Windows Linux Darwin
13:	cfitsio	4.1.0	Windows Linux Darwin
14:	CMake	3.21.4	Windows Linux Darwin
15:	critcl	3.2	Windows Linux Darwin
16:	curl	7.70.0	Windows Linux Darwin
17:	DiffUtil	0.4.2	Windows Linux Darwin
18:	DirectXTex	2021_11	Windows
19:	Doxygen	1.8.15	Windows
20:	Eigen	3.3.9	Windows Linux Darwin
21:	expect	5.45.4	Linux Darwin
22:	Ffidl	0.9.0	Windows Linux Darwin
23:	ffmpeg	4.4.1	Windows Linux Darwin
24:	fftw	3.3.9	Windows Linux Darwin
25:	fitsTcl	2.5	Windows Linux Darwin
26:	freeglut	3.2.2	Windows Linux Darwin
27:	Freetype	2.10.4	Windows Linux Darwin
28:	FTGL	2.1.3	Windows Linux Darwin
29:	gdal	2.4.4	Windows Linux Darwin
30:	gdi	0.9.9.15	Windows
31:	GeographicLib	1.52	Windows Linux Darwin
32:	GeographicLibData		Windows Linux Darwin
33:	geos	3.7.2	Windows Linux Darwin
34:	giflib	5.2.1	Windows Linux Darwin
35:	Gl2ps	1.4.2	Windows Linux Darwin
36:	GLEW	2.2.0	Windows Linux Darwin
37:	glfw	3.3.2	Windows Linux Darwin
38:	gorilla	1.6.0	Windows Linux Darwin
39:	hdc	0.2.0.1	Windows
40:	Img	1.4.14	Windows Linux Darwin
41:	imgjp2	0.1	Windows Linux Darwin
42:	imgtools	0.3	Windows Linux Darwin
43:	InnoSetup	6.2.0	Windows
44:	iocp	1.1.0	Windows
45:	itk	4.1.0	Windows Linux Darwin
46:	iwidgets	4.1.1	Windows Linux Darwin
47:	jasper	2.0.25	Windows Linux Darwin
48:	JPEG	9.e	Windows Linux Darwin
49:	KDIS	2.9.0	Windows Linux Darwin
50:	libffi	3.4.2	Windows Linux Darwin
51:	libgd	2.3.2	Windows Linux Darwin
52:	libressl	2.9.2	Windows Linux Darwin
53:	libwebp	1.2.4	Windows Linux Darwin
54:	libxml2	2.9.14	Windows Linux Darwin
55:	materialicons	0.2	Windows Linux Darwin
56:	mawt	0.4.1	Windows Linux Darwin
57:	memchan	2.3	Windows Linux Darwin
58:	mentry	3.16	Windows Linux Darwin
59:	Mpexpr	1.2	Windows Linux Darwin
60:	mqtt	3.1	Windows Linux Darwin
61:	mupdf	1.21.1	Windows Linux Darwin
62:	MuPDFWidget	2.2	Windows Linux Darwin
63:	nacl	1.1	Windows Linux Darwin

64:	nsf	2.4.0	Windows	Linux	Darwin
65:	OglInfo	0.9.5	Windows	Linux	
66:	ooxml	1.6.1	Windows	Linux	Darwin
67:	openjpeg	2.5.0	Windows	Linux	Darwin
68:	OpenSceneGraph	3.6.5	Windows	Linux	Darwin
69:	OpenSceneGraphData	3.4.0	Windows	Linux	Darwin
70:	oratcl	4.6	Windows	Linux	Darwin
71:	osgcal	0.2.1	Windows	Linux	
72:	osgearth	2.10.1	Windows	Linux	Darwin
73:	parse_args	0.3.3	Windows	Linux	Darwin
74:	pawt	1.1.0	Windows	Linux	Darwin
75:	pdf4tcl	0.9.4	Windows	Linux	Darwin
76:	pgintcl	3.5.1	Windows	Linux	Darwin
77:	photoresize	0.2	Windows	Linux	Darwin
78:	pkgconfig	0.29.2	Darwin		
79:	PNG	1.6.38	Windows	Linux	Darwin
80:	poApps	2.11.0	Windows	Linux	Darwin
81:	poImg	2.0.2	Windows	Linux	Darwin
82:	printer	0.9.6.15	Windows		
83:	puppyicons	0.1	Windows	Linux	Darwin
84:	Python	3.7.7	Windows		
85:	rbc	0.2	Windows	Linux	
86:	Redistributables		Windows		
87:	rl_json	0.11.5	Windows	Linux	Darwin
88:	ruff	2.3.0	Windows	Linux	Darwin
89:	scrollutil	1.17	Windows	Linux	Darwin
90:	SDL	2.26.1	Windows	Linux	Darwin
91:	SetupOsg		Windows	Linux	Darwin
92:	SetupPython		Windows		
93:	SetupTcl		Windows	Linux	Darwin
94:	shellicon	0.1	Windows		
95:	shtmlview	1.0.0	Windows	Linux	Darwin
96:	Snack	2.2.11	Windows	Linux	
97:	sqlite3	3.39.4	Windows	Linux	Darwin
98:	SWIG	4.1.1	Windows	Linux	Darwin
99:	tablelist	6.20	Windows	Linux	Darwin
100:	tbclload	1.7.1	Windows	Linux	Darwin
101:	Tcl	8.6.13	Windows	Linux	Darwin
102:	tcl3dBasic	0.9.5	Windows	Linux	
103:	tcl3dFull	0.9.5	Windows	Linux	
104:	Tcladdressbook	1.2.4	Darwin		
105:	tclAE	2.0.7	Darwin		
106:	Tclapplescript	2.2	Darwin		
107:	tclargp	0.2	Windows	Linux	Darwin
108:	tclcompiler	1.7.3	Windows	Linux	Darwin
109:	tclcsv	2.3	Windows	Linux	Darwin
110:	tclfpdf	1.5	Windows	Linux	Darwin
111:	tclgd	1.4	Windows	Linux	Darwin
112:	Tclkit		Windows	Linux	Darwin
113:	tcllib	1.21	Windows	Linux	Darwin
114:	tclMuPdf	2.1.1	Windows	Linux	Darwin
115:	tclparser	1.8	Windows	Linux	Darwin
116:	tclpy	0.4	Windows	Linux	
117:	tclssg	2.2.1	Windows	Linux	Darwin
118:	TclStubs	8.6.13	Windows		
119:	TclTkManual		Windows	Linux	Darwin
120:	tcltts	1.7.22	Windows	Linux	Darwin
121:	tclvfs	1.4.2	Windows	Linux	Darwin
122:	tclws	3.4.0	Windows	Linux	Darwin
123:	tclx	8.4.4	Windows	Linux	Darwin
124:	tdom	0.9.3	Windows	Linux	Darwin
125:	TIFF	4.4.0	Windows	Linux	Darwin
126:	tinyxml2	8.0.0	Windows	Linux	Darwin
127:	Tix	8.4.3	Windows	Linux	Darwin
128:	Tk	8.6.13	Windows	Linux	Darwin
129:	tkchat	1.482	Windows	Linux	Darwin
130:	tkcon	2.7.10	Windows	Linux	Darwin
131:	tkdnd	2.9.3	Windows	Linux	Darwin
132:	Tkhtml	3.0.1	Windows	Linux	Darwin
133:	tklib	0.7	Windows	Linux	Darwin
134:	tkpath	0.3.3	Windows	Linux	Darwin

135:	tkribbon	1.1	Windows		
136:	tksqlite	0.5.13	Windows	Linux	Darwin
137:	TkStubs	8.6.13	Windows		
138:	tksvg	0.12	Windows	Linux	Darwin
139:	Tktable	2.11	Windows	Linux	Darwin
140:	tkwintrack	2.0.1	Windows	Linux	
141:	treectrl	2.4.1	Windows	Linux	Darwin
142:	Trf	2.1.4	Windows	Linux	Darwin
143:	trofs	0.4.9	Windows	Linux	Darwin
144:	tserialport	1.1	Windows	Linux	Darwin
145:	twapi	4.7.2	Windows		
146:	tzint	1.1	Windows	Linux	Darwin
147:	udp	1.0.11	Windows	Linux	Darwin
148:	ukaz	2.0a3	Windows	Linux	Darwin
149:	vectcl	0.2	Windows	Linux	Darwin
150:	Vim	9.0.0	Windows		
151:	wcb	3.8	Windows	Linux	Darwin
152:	windetect	1.0.0	Windows	Linux	
153:	winhelp	1.1	Windows		
154:	Xerces	3.2.4	Windows	Linux	Darwin
155:	xz	5.2.7	Windows	Linux	Darwin
156:	yasm	1.3.0	Windows		
157:	ZLib	1.2.13	Windows	Linux	Darwin

**List of all libraries (using command line option [--dependencies](#))**

#:	Name	Version	Dependencies
1:	apave	3.4.8	Tk
2:	awthemes	10.4.0	Tk
3:	BawtLogViewer	2.3.1	Tclkit tablelist tkdnd poApps scrollutil
4:	Blender	3.0.0	
5:	Boost	1.75.0	
6:	BWidget	1.9.16	Tk
7:	Cal3D	0.120	CMake freeglut
8:	Canvas3d	1.2.2	Tk
9:	cawt	2.9.2	Tcl twapi
10:	ccl	4.0.6	CMake
11:	CERTI	3.5.1	CMake
12:	cfffi	1.2.0	Tcl libffi
13:	cfitsio	4.1.0	
14:	CMake	3.21.4	
15:	critcl	3.2	Tcl
16:	curl	7.70.0	libressl
17:	DiffUtil	0.4.2	Tcl
18:	DirectXTex	2021_11	
19:	Doxygen	1.8.15	
20:	Eigen	3.3.9	
21:	expect	5.45.4	Tcl
22:	Ffidl	0.9.0	Tcl libffi
23:	ffmpeg	4.4.1	yasm SDL
24:	fftw	3.3.9	
25:	fitsTcl	2.5	Tcl cfitsio
26:	freeglut	3.2.2	CMake
27:	FreeType	2.10.4	PNG
28:	FTGL	2.1.3	FreeType
29:	gdal	2.4.4	openjpeg
30:	gdi	0.9.9.15	Tk TkStubs
31:	GeographicLib	1.52	CMake
32:	GeographicLibData		GeographicLib
33:	geos	3.7.2	CMake
34:	giflib	5.2.1	
35:	Gl2ps	1.4.2	CMake freeglut PNG ZLib
36:	GLEW	2.2.0	CMake
37:	glfw	3.3.2	CMake
38:	gorilla	1.6.0	Tcl Tclkit
39:	hdc	0.2.0.1	Tk TkStubs
40:	Img	1.4.14	Tk TkStubs
41:	imgj2p	0.1	Tk openjpeg
42:	imgtools	0.3	Tcl Tk
43:	InnoSetup	6.2.0	
44:	iocp	1.1.0	Tcl
45:	itk	4.1.0	Tk

46:	iwidgets	4.1.1	Tk
47:	jasper	2.0.25	CMake JPEG
48:	JPEG	9.e	
49:	KDIS	2.9.0	CMake
50:	libffi	3.4.2	
51:	libgd	2.3.2	ZLib TIFF JPEG PNG libwebp Freetype
52:	libressl	2.9.2	
53:	libwebp	1.2.4	
54:	libxml2	2.9.14	CMake Zlib
55:	materialicons	0.2	Tk tdom tksvg
56:	mawt	0.4.1	Tk TkStubs SWIG CMake Img ffmpeg
57:	memchan	2.3	Tcl
58:	mentry	3.16	Tk wcb
59:	Mpexpr	1.2	Tcl
60:	mqtt	3.1	Tcl
61:	mupdf	1.21.1	
62:	MuPDFWidget	2.2	Tk tclMuPdf
63:	nacl	1.1	Tcl
64:	nsf	2.4.0	Tcl
65:	OglInfo	0.9.5	Tclkit tcl3dBasic
66:	ooxml	1.6.1	Tcl tclvfs tdom
67:	openjpeg	2.5.0	CMake
68:	OpenSceneGraph	3.6.5	CMake ZLib TIFF JPEG jasper giflib PNG curl Freetype ffmpeg
69:	OpenSceneGraphData	3.4.0	OpenSceneGraph
70:	oratcl	4.6	Tcl
71:	osgcal	0.2.1	Cal3D OpenSceneGraph
72:	osgearth	2.10.1	CMake curl gdal geos OpenSceneGraph
73:	parse_args	0.3.3	Tcl
74:	pawt	1.1.0	Tcl fitstcl Img
75:	pdf4tcl	0.9.4	Tk
76:	pgintcl	3.5.1	Tcl
77:	photoresize	0.2	Tcl Tk
78:	pkgconfig	0.29.2	
79:	PNG	1.6.38	CMake ZLib
80:	poApps	2.11.0	Tclkit tcllib tablelist Img tdom tclMuPdf fitsTcl poImg cawt pawt
twapi tkdnd tksvg scrollutil			
81:	poImg	2.0.2	Tk
82:	printer	0.9.6.15	Tk TkStubs
83:	puppyicons	0.1	Tk tksvg
84:	Python	3.7.7	
85:	rbc	0.2	Tk
86:	Redistributables		
87:	rl_json	0.11.5	Tcl
88:	ruff	2.3.0	Tcl
89:	scrollutil	1.17	Tk
90:	SDL	2.26.1	CMake
91:	SetupOsg		All
92:	SetupPython		Python
93:	SetupTcl		All
94:	shellicon	0.1	Tk TkStubs
95:	shtmlview	1.0.0	Tk
96:	Snack	2.2.11	Tk TkStubs
97:	sqlite3	3.39.4	
98:	SWIG	4.1.1	
99:	tablelist	6.20	Tk
100:	tbclload	1.7.1	Tcl
101:	Tcl	8.6.13	
102:	tcl3dBasic	0.9.5	CMake Tk TkStubs SWIG
103:	tcl3dFull	0.9.5	CMake Tk TkStubs SWIG Freetype FTGL SDL OpenSceneGraph
104:	Tcladdressbook	1.2.4	Tcl
105:	tclAE	2.0.7	Tcl
106:	Tclapplescript	2.2	Tcl
107:	tclargp	0.2	Tcl
108:	tclcompiler	1.7.3	Tcl
109:	tclcsv	2.3	Tcl
110:	tclfpdf	1.5	Tk
111:	tclgd	1.4	Tcl libgd
112:	Tclkit		Tcl Tk
113:	tcllib	1.21	Tcl critcl
114:	tclMuPdf	2.1.1	Tk TkStubs mupdf
115:	tclparser	1.8	Tcl
116:	tclpy	0.4	Tk TkStubs Python
117:	tclssg	2.2.1	Tcl Tclkit tcllib
118:	TclStubs	8.6.13	
119:	TclTkManual		Tcl Tk
120:	tcltls	1.7.22	Tcl libressl
121:	tclvfs	1.4.2	Tcl
122:	tclws	3.4.0	Tcl tdom tcllib
123:	tclx	8.4.4	Tcl
124:	tdom	0.9.3	Tcl

125:	TIFF	4.4.0	JPEG ZLib xz
126:	tinyxml2	8.0.0	CMake
127:	Tix	8.4.3	Tk
128:	Tk	8.6.13	Tcl
129:	tkchat	1.482	Tclkit
130:	tkcon	2.7.10	Tk
131:	tkdnd	2.9.3	CMake Tk TkStubs
132:	Tkhtml	3.0.1	Tcl Tk
133:	tklib	0.7	Tk
134:	tkpath	0.3.3	Tk
135:	tkribbon	1.1	Tk TkStubs
136:	tksqlite	0.5.13	Tcl Tclkit tablelist Tktable treectrl Img
137:	TkStubs	8.6.13	TclStubs
138:	tksvg	0.12	Tk
139:	Tktable	2.11	Tk
140:	tkwintrack	2.0.1	Tk
141:	treectrl	2.4.1	Tk
142:	Trf	2.1.4	Tcl Zlib
143:	trofs	0.4.9	Tk
144:	tserialport	1.1	Tcl
145:	twapi	4.7.2	Tcl
146:	tzint	1.1	Tcl PNG
147:	udp	1.0.11	Tcl
148:	ukaz	2.0a3	Tk
149:	vectcl	0.2	Tcl
150:	Vim	9.0.0	
151:	wcb	3.8	Tk
152:	windetect	1.0.0	Tk
153:	winhelp	1.1	Tcl Tk
154:	Xerces	3.2.4	CMake
155:	xz	5.2.7	
156:	yasm	1.3.0	
157:	ZLib	1.2.13	

**List of all libraries (using command line option [--authors](#))**

#:	Name	Version	ScriptAuthor
-----			
1:	apave	3.4.8	Paul Obermeier
2:	awthemes	10.4.0	Paul Obermeier
3:	BawLogViewer	2.3.1	Paul Obermeier
4:	Blender	3.0.0	Paul Obermeier
5:	Boost	1.75.0	Paul Obermeier
6:	BWidget	1.9.16	Paul Obermeier
7:	Cal3D	0.120	Paul Obermeier
8:	Canvas3d	1.2.2	Paul Obermeier
9:	cawt	2.9.2	Paul Obermeier
10:	ccl	4.0.6	Paul Obermeier
11:	CERTI	3.5.1	Paul Obermeier
12:	cffi	1.2.0	Paul Obermeier
13:	cfitsio	4.1.0	Paul Obermeier
14:	CMake	3.21.4	Paul Obermeier
15:	critcl	3.2	Paul Obermeier
16:	curl	7.70.0	Paul Obermeier
17:	DiffUtil	0.4.2	Paul Obermeier
18:	DirectXTex	2021_11	Paul Obermeier
19:	Doxygen	1.8.15	Paul Obermeier
20:	Eigen	3.3.9	Paul Obermeier
21:	expect	5.45.4	Paul Obermeier
22:	Ffidl	0.9.0	Paul Obermeier
23:	ffmpeg	4.4.1	Paul Obermeier
24:	fftw	3.3.9	Paul Obermeier
25:	fitsTcl	2.5	Paul Obermeier
26:	freeglut	3.2.2	Paul Obermeier
27:	Freetype	2.10.4	Paul Obermeier
28:	FTGL	2.1.3	Paul Obermeier
29:	gdal	2.4.4	Paul Obermeier
30:	gdi	0.9.9.15	Paul Obermeier
31:	GeographicLib	1.52	Paul Obermeier
32:	GeographicLibData		Paul Obermeier
33:	geos	3.7.2	Paul Obermeier
34:	giflib	5.2.1	Paul Obermeier

35:	Gl2ps	1.4.2	Paul Obermeier
36:	GLEW	2.2.0	Paul Obermeier
37:	glfw	3.3.2	Paul Obermeier
38:	gorilla	1.6.0	Paul Obermeier
39:	hdc	0.2.0.1	Paul Obermeier
40:	Img	1.4.14	Paul Obermeier
41:	imgjp2	0.1	Paul Obermeier
42:	imgtools	0.3	Paul Obermeier
43:	InnoSetup	6.2.0	Paul Obermeier
44:	iocp	1.1.0	Paul Obermeier
45:	itk	4.1.0	Paul Obermeier
46:	iwidgets	4.1.1	Paul Obermeier
47:	jasper	2.0.25	Paul Obermeier
48:	JPEG	9.e	Paul Obermeier
49:	KDIS	2.9.0	Paul Obermeier
50:	libffi	3.4.2	Paul Obermeier
51:	libgd	2.3.2	Alexander Schoepe
52:	libressl	2.9.2	Paul Obermeier
53:	libwebp	1.2.4	Paul Obermeier
54:	libxml2	2.9.14	Paul Obermeier
55:	materialicons	0.2	Paul Obermeier
56:	mawt	0.4.1	Paul Obermeier
57:	memchan	2.3	Alexander Schoepe
58:	mentry	3.16	Paul Obermeier
59:	Mpexpr	1.2	Paul Obermeier
60:	mqtt	3.1	Paul Obermeier
61:	mupdf	1.21.1	Paul Obermeier
62:	MuPDFWidget	2.2	Paul Obermeier
63:	nacl	1.1	Paul Obermeier
64:	nsf	2.4.0	Paul Obermeier
65:	OglInfo	0.9.5	Paul Obermeier
66:	ooxml	1.6.1	Paul Obermeier
67:	openjpeg	2.5.0	Paul Obermeier
68:	OpenSceneGraph	3.6.5	Paul Obermeier
69:	OpenSceneGraphData	3.4.0	Paul Obermeier
70:	oratcl	4.6	Alexander Schoepe
71:	osgcal	0.2.1	Paul Obermeier
72:	osgearth	2.10.1	Paul Obermeier
73:	parse_args	0.3.3	Paul Obermeier
74:	pawt	1.1.0	Paul Obermeier
75:	pdf4tcl	0.9.4	Paul Obermeier
76:	pgintcl	3.5.1	Paul Obermeier
77:	photoresize	0.2	Paul Obermeier
78:	pkgconfig	0.29.2	Paul Obermeier
79:	PNG	1.6.38	Paul Obermeier
80:	poApps	2.11.0	Paul Obermeier
81:	poImg	2.0.2	Paul Obermeier
82:	printer	0.9.6.15	Paul Obermeier
83:	puppyicons	0.1	Paul Obermeier
84:	Python	3.7.7	Paul Obermeier
85:	rbc	0.2	Alexander Schoepe
86:	Redistributables		Paul Obermeier
87:	rl_json	0.11.5	Paul Obermeier
88:	ruff	2.3.0	Paul Obermeier
89:	scrollutil	1.17	Paul Obermeier
90:	SDL	2.26.1	Paul Obermeier
91:	SetupOsg		Paul Obermeier
92:	SetupPython		Paul Obermeier
93:	SetupTcl		Paul Obermeier
94:	shellicon	0.1	Paul Obermeier
95:	shtmlview	1.0.0	Paul Obermeier
96:	Snack	2.2.11	Paul Obermeier
97:	sqlite3	3.39.4	Paul Obermeier
98:	SWIG	4.1.1	Paul Obermeier
99:	tablelist	6.20	Paul Obermeier
100:	tbcloud	1.7.1	Alexander Schoepe
101:	Tcl	8.6.13	Paul Obermeier
102:	tcl3dBasic	0.9.5	Paul Obermeier
103:	tcl3dFull	0.9.5	Paul Obermeier
104:	Tcladdressbook	1.2.4	Alexander Schoepe
105:	tclAE	2.0.7	Alexander Schoepe

106:	Tclapplescript	2.2	Alexander Schoepe
107:	tclargp	0.2	Paul Obermeier
108:	tclcompiler	1.7.3	Alexander Schoepe
109:	tclcsv	2.3	Paul Obermeier
110:	tclfpdf	1.5	Paul Obermeier
111:	tclgd	1.4	Alexander Schoepe
112:	Tclkit		Paul Obermeier
113:	tcllib	1.21	Paul Obermeier
114:	tclMuPdf	2.1.1	Paul Obermeier
115:	tclparser	1.8	Alexander Schoepe
116:	tclpy	0.4	Paul Obermeier
117:	tclssg	2.2.1	Paul Obermeier
118:	TclStubs	8.6.13	Paul Obermeier
119:	TclTkManual		Paul Obermeier
120:	tcltls	1.7.22	Alexander Schoepe
121:	tclvfs	1.4.2	Paul Obermeier
122:	tclws	3.4.0	Paul Obermeier
123:	tclx	8.4.4	Paul Obermeier
124:	tdom	0.9.3	Paul Obermeier
125:	TIFF	4.4.0	Paul Obermeier
126:	tinyxml2	8.0.0	Paul Obermeier
127:	Tix	8.4.3	Paul Obermeier
128:	Tk	8.6.13	Paul Obermeier
129:	tkchat	1.482	Paul Obermeier
130:	tkcon	2.7.10	Paul Obermeier
131:	tkdnd	2.9.3	Paul Obermeier
132:	Tkhtml	3.0.1	Paul Obermeier
133:	tklib	0.7	Paul Obermeier
134:	tkpath	0.3.3	Paul Obermeier
135:	tkribbon	1.1	Paul Obermeier
136:	tksqlite	0.5.13	Paul Obermeier
137:	TkStubs	8.6.13	Paul Obermeier
138:	tksvg	0.12	Paul Obermeier
139:	Tktable	2.11	Paul Obermeier
140:	tkwintrack	2.0.1	Paul Obermeier
141:	treectrl	2.4.1	Paul Obermeier
142:	Trf	2.1.4	Paul Obermeier
143:	trofs	0.4.9	Paul Obermeier
144:	tserialport	1.1	Alexander Schoepe
145:	twapi	4.7.2	Paul Obermeier
146:	tzint	1.1	Alexander Schoepe
147:	udp	1.0.11	Paul Obermeier
148:	ukaz	2.0a3	Paul Obermeier
149:	vectcl	0.2	Paul Obermeier
150:	Vim	9.0.0	Paul Obermeier
151:	wcb	3.8	Paul Obermeier
152:	windetect	1.0.0	Paul Obermeier
153:	winhelp	1.1	Paul Obermeier
154:	Xerces	3.2.4	Paul Obermeier
155:	xz	5.2.7	Paul Obermeier
156:	yasm	1.3.0	Paul Obermeier
157:	ZLib	1.2.13	Paul Obermeier

List of all libraries (using command line option <a href="#">--homepages</a> )			
#:	Name	Version	Homepage
-			
1:	apave	3.4.8	<a href="https://aplsimple.github.io/en/tcl/pave/index.html">https://aplsimple.github.io/en/tcl/pave/index.html</a>
2:	awthemes	10.4.0	<a href="https://sourceforge.net/projects/tcl-awthemes/">https://sourceforge.net/projects/tcl-awthemes/</a>
3:	BawtLogViewer	2.3.1	<a href="http://www.bawt.tcl3d.org">http://www.bawt.tcl3d.org</a>
4:	Blender	3.0.0	<a href="https://www.blender.org/">https://www.blender.org/</a>
5:	Boost	1.75.0	<a href="https://www.boost.org/">https://www.boost.org/</a>
6:	BWidget	1.9.16	<a href="https://core.tcl-lang.org/bwidget/">https://core.tcl-lang.org/bwidget/</a>
7:	Cal3D	0.120	<a href="https://github.com/mp3butcher/Cal3D">https://github.com/mp3butcher/Cal3D</a>
8:	Canvas3d	1.2.2	<a href="http://3dcanvas.tcl-lang.org/">http://3dcanvas.tcl-lang.org/</a>
9:	cawt	2.9.2	<a href="http://www.cawt.tcl3d.org/">http://www.cawt.tcl3d.org/</a>
10:	ccl	4.0.6	<a href="https://sourceforge.net/projects/cigi/">https://sourceforge.net/projects/cigi/</a>
11:	CERTI	3.5.1	<a href="https://savannah.nongnu.org/projects/certi/">https://savannah.nongnu.org/projects/certi/</a>
12:	cffi	1.2.0	<a href="https://github.com/apnadkarni/tcl-cffi">https://github.com/apnadkarni/tcl-cffi</a>

13:	cfitsio	4.1.0	<a href="https://heasarc.gsfc.nasa.gov/fitsio/">https://heasarc.gsfc.nasa.gov/fitsio/</a>
14:	CMake	3.21.4	<a href="https://www.cmake.org/">https://www.cmake.org/</a>
15:	critcl	3.2	<a href="https://andreas-kupries.github.io/critcl/">https://andreas-kupries.github.io/critcl/</a>
16:	curl	7.70.0	<a href="https://curl.haxx.se/libcurl/">https://curl.haxx.se/libcurl/</a>
17:	DiffUtil	0.4.2	<a href="https://github.com/pspjuth/DiffUtilTcl/">https://github.com/pspjuth/DiffUtilTcl/</a>
18:	DirectXTex	2021_11	<a href="https://github.com/microsoft/DirectXTex/">https://github.com/microsoft/DirectXTex/</a>
19:	Doxygen	1.8.15	<a href="http://www.doxygen.org/">http://www.doxygen.org/</a>
20:	Eigen	3.3.9	<a href="http://eigen.tuxfamily.org/">http://eigen.tuxfamily.org/</a>
21:	expect	5.45.4	<a href="https://sourceforge.net/projects/expect/">https://sourceforge.net/projects/expect/</a>
22:	Ffidl	0.9.0	<a href="https://github.com/prs-de/ffidl">https://github.com/prs-de/ffidl</a>
23:	ffmpeg	4.4.1	<a href="https://www.ffmpeg.org/">https://www.ffmpeg.org/</a>
24:	fftw	3.3.9	<a href="http://www.fftw.org/">http://www.fftw.org/</a>
25:	fitsTcl	2.5	
<a href="https://heasarc.gsfc.nasa.gov/docs/software/ftools/fv/fitsTcl_home.html">https://heasarc.gsfc.nasa.gov/docs/software/ftools/fv/fitsTcl_home.html</a>			
26:	freeglut	3.2.2	<a href="https://sourceforge.net/projects/freeglut/">https://sourceforge.net/projects/freeglut/</a>
27:	Freetype	2.10.4	<a href="http://www.freetype.org/">http://www.freetype.org/</a>
28:	FTGL	2.1.3	<a href="https://sourceforge.net/projects/ftgl/">https://sourceforge.net/projects/ftgl/</a>
29:	gdal	2.4.4	<a href="https://www.gdal.org/">https://www.gdal.org/</a>
30:	gdi	0.9.9.15	<a href="http://www.schwartzcomputer.com/tcl-tk/tcl-tk.html">http://www.schwartzcomputer.com/tcl-tk/tcl-tk.html</a>
31:	GeographicLib	1.52	<a href="https://geographiclib.sourceforge.io/">https://geographiclib.sourceforge.io/</a>
32:	GeographicLibData		<a href="https://geographiclib.sourceforge.io/">https://geographiclib.sourceforge.io/</a>
33:	geos	3.7.2	<a href="http://trac.osgeo.org/geos/">http://trac.osgeo.org/geos/</a>
34:	giflib	5.2.1	<a href="http://giflib.sourceforge.net/">http://giflib.sourceforge.net/</a>
35:	Gl2ps	1.4.2	<a href="http://www.geuz.org/gl2ps/">http://www.geuz.org/gl2ps/</a>
36:	GLEW	2.2.0	<a href="https://github.com/nigels-com/glew/">https://github.com/nigels-com/glew/</a>
37:	glfw	3.3.2	<a href="https://www.glfw.org/">https://www.glfw.org/</a>
38:	gorilla	1.6.0	<a href="https://github.com/zdia/gorilla/wiki">https://github.com/zdia/gorilla/wiki</a>
39:	hdc	0.2.0.1	<a href="http://www.schwartzcomputer.com/tcl-tk/tcl-tk.html">http://www.schwartzcomputer.com/tcl-tk/tcl-tk.html</a>
40:	Img	1.4.14	<a href="https://sourceforge.net/projects/tkimg/">https://sourceforge.net/projects/tkimg/</a>
41:	imgj2	0.1	<a href="https://www.androwish.org/home/dir?name=jni/imgj2">https://www.androwish.org/home/dir?name=jni/imgj2</a>
42:	imgtools	0.3	<a href="http://tkimgtools.sourceforge.net/">http://tkimgtools.sourceforge.net/</a>
43:	InnoSetup	6.2.0	<a href="http://www.jrsoftware.org/isinfo.php">http://www.jrsoftware.org/isinfo.php</a>
44:	iocp	1.1.0	<a href="https://github.com/apnadkarni/iocp/">https://github.com/apnadkarni/iocp/</a>
45:	itk	4.1.0	<a href="https://sourceforge.net/projects/incrtcl/">https://sourceforge.net/projects/incrtcl/</a>
46:	iwidgets	4.1.1	<a href="https://sourceforge.net/projects/incrtcl/">https://sourceforge.net/projects/incrtcl/</a>
47:	jasper	2.0.25	<a href="https://github.com/jasper-software/jasper/">https://github.com/jasper-software/jasper/</a>
48:	JPEG	9.e	<a href="http://www.ijg.org/">http://www.ijg.org/</a>
49:	KDIS	2.9.0	<a href="https://sourceforge.net/projects/kdis/">https://sourceforge.net/projects/kdis/</a>
50:	libffi	3.4.2	<a href="https://github.com/libffi/libffi">https://github.com/libffi/libffi</a>
51:	libgd	2.3.2	<a href="https://libgd.github.io">https://libgd.github.io</a>
52:	libressl	2.9.2	<a href="https://www.libressl.org/">https://www.libressl.org/</a>
53:	libwebp	1.2.4	<a href="https://developers.google.com/speed/webp/">https://developers.google.com/speed/webp/</a>
54:	libxml2	2.9.14	<a href="https://gitlab.gnome.org/GNOME/libxml2">https://gitlab.gnome.org/GNOME/libxml2</a>
55:	materialicons	0.2	<a href="https://www.androwish.org/">https://www.androwish.org/</a>
56:	mawt	0.4.1	<a href="http://www.mawt.tcl3d.org/">http://www.mawt.tcl3d.org/</a>
57:	memchan	2.3	<a href="http://memchan.sourceforge.net/">http://memchan.sourceforge.net/</a>
58:	mentry	3.16	<a href="http://www.nemethi.de/">http://www.nemethi.de/</a>
59:	Mpexpr	1.2	<a href="https://sourceforge.net/projects/mpexpr/">https://sourceforge.net/projects/mpexpr/</a>
60:	mqt	3.1	<a href="https://chiselapp.com/user/schelte/repository/mqt/home">https://chiselapp.com/user/schelte/repository/mqt/home</a>
61:	mupdf	1.21.1	<a href="https://mupdf.com/">https://mupdf.com/</a>
62:	MuPDFWidget	2.2	<a href="https://sourceforge.net/projects/irrational-numbers/">https://sourceforge.net/projects/irrational-numbers/</a>
63:	nacl	1.1	<a href="https://tcl.sowaswie.de/repos/fossil/nacl/home">https://tcl.sowaswie.de/repos/fossil/nacl/home</a>
64:	nsf	2.4.0	<a href="https://next-scripting.org">https://next-scripting.org</a>
65:	OglInfo	0.9.5	<a href="http://www.tcl3d.org/">http://www.tcl3d.org/</a>
66:	ooxml	1.6.1	<a href="https://tcl.sowaswie.de/repos/fossil/ooxml/home">https://tcl.sowaswie.de/repos/fossil/ooxml/home</a>
67:	openjpeg	2.5.0	<a href="http://www.openjpeg.org/">http://www.openjpeg.org/</a>
68:	OpenSceneGraph	3.6.5	<a href="http://www.openscenegraph.org/">http://www.openscenegraph.org/</a>
69:	OpenSceneGraphData	3.4.0	<a href="http://www.openscenegraph.org/">http://www.openscenegraph.org/</a>
70:	oratcl	4.6	<a href="http://oratcl.sourceforge.net">http://oratcl.sourceforge.net</a>
71:	osgcal	0.2.1	<a href="https://sourceforge.net/projects/osgcal/">https://sourceforge.net/projects/osgcal/</a>
72:	osgearth	2.10.1	<a href="http://osgearth.org/">http://osgearth.org/</a>
73:	parse_args	0.3.3	<a href="https://github.com/RubyLane/parse_args">https://github.com/RubyLane/parse_args</a>
74:	pawt	1.1.0	<a href="http://www.pawt.tcl3d.org/">http://www.pawt.tcl3d.org/</a>
75:	pdf4tcl	0.9.4	<a href="https://sourceforge.net/projects/pdf4tcl/">https://sourceforge.net/projects/pdf4tcl/</a>
76:	pgintcl	3.5.1	<a href="https://sourceforge.net/projects/pgintcl/">https://sourceforge.net/projects/pgintcl/</a>
77:	photoresize	0.2	<a href="https://github.com/auriocus/PhotoResize">https://github.com/auriocus/PhotoResize</a>
78:	pkgconfig	0.29.2	<a href="https://www.freedesktop.org/wiki/Software/pkg-config/">https://www.freedesktop.org/wiki/Software/pkg-config/</a>
79:	PNG	1.6.38	<a href="http://www.libpng.org/pub/png/">http://www.libpng.org/pub/png/</a>
80:	poApps	2.11.0	<a href="http://www.poSoft.de/html/poTools.html">http://www.poSoft.de/html/poTools.html</a>
81:	poImg	2.0.2	<a href="http://www.poSoft.de/">http://www.poSoft.de/</a>
82:	printer	0.9.6.15	<a href="http://www.schwartzcomputer.com/tcl-tk/tcl-tk.html">http://www.schwartzcomputer.com/tcl-tk/tcl-tk.html</a>
83:	puppyicons	0.1	<a href="https://www.androwish.org/">https://www.androwish.org/</a>
84:	Python	3.7.7	<a href="http://www.python.org/">http://www.python.org/</a>
85:	rbc	0.2	<a href="http://www.sourceforge.net/projects/rbctoolkit/">http://www.sourceforge.net/projects/rbctoolkit/</a>
86:	Redistributables		<a href="https://support.microsoft.com/en-us/kb/2977003">https://support.microsoft.com/en-us/kb/2977003</a>
87:	rl_json	0.11.5	<a href="https://github.com/RubyLane/rl_json">https://github.com/RubyLane/rl_json</a>
88:	ruff	2.3.0	<a href="https://ruff.magicsplat.com/">https://ruff.magicsplat.com/</a>
89:	scrollutil	1.17	<a href="http://www.nemethi.de/">http://www.nemethi.de/</a>
90:	SDL	2.26.1	<a href="https://www.libsdl.org/">https://www.libsdl.org/</a>
91:	SetupOsg		<a href="http://www.bawt.tcl3d.org/">http://www.bawt.tcl3d.org/</a>

92: SetupPython		<a href="http://www.bawt.tcl3d.org/">http://www.bawt.tcl3d.org/</a>
93: SetupTcl		<a href="http://www.bawt.tcl3d.org/">http://www.bawt.tcl3d.org/</a>
94: shellicon	0.1	<a href="http://wiki.tcl-lang.org/17859">http://wiki.tcl-lang.org/17859</a>
95: shtmlview	1.0.0	<a href="https://github.com/mittelmark/shtmlview/">https://github.com/mittelmark/shtmlview/</a>
96: Snack	2.2.11	<a href="https://github.com/scottypitcher/tcl-snack">https://github.com/scottypitcher/tcl-snack</a>
97: sqlite3	3.39.4	<a href="https://www.sqlite.org/">https://www.sqlite.org/</a>
98: SWIG	4.1.1	<a href="http://www.swig.org/">http://www.swig.org/</a>
99: tablelist	6.20	<a href="http://www.nemethi.de/">http://www.nemethi.de/</a>
100: tbcload	1.7.1	<a href="https://github.com/ActiveState/teapot/tree/master/lib/tbcload">https://github.com/ActiveState/teapot/tree/master/lib/tbcload</a>
101: Tcl	8.6.13	<a href="http://www.tcl-lang.org/">http://www.tcl-lang.org/</a>
102: tcl3dBasic	0.9.5	<a href="http://www.tcl3d.org/">http://www.tcl3d.org/</a>
103: tcl3dFull	0.9.5	<a href="http://www.tcl3d.org/">http://www.tcl3d.org/</a>
104: Tcladdressbook	1.2.4	<a href="https://sourceforge.net/projects/tcladdressbook/">https://sourceforge.net/projects/tcladdressbook/</a>
105: tclAE	2.0.7	<a href="https://sourceforge.net/projects/tclae/">https://sourceforge.net/projects/tclae/</a>
106: Tclapplescript	2.2	<a href="https://sourceforge.net/projects/tclapplescript/">https://sourceforge.net/projects/tclapplescript/</a>
107: tclargp	0.2	<a href="http://www.chevreux.org/projects_tcl.html">http://www.chevreux.org/projects_tcl.html</a>
108: tclcompiler	1.7.3	<a href="https://github.com/ActiveState/teapot/tree/master/lib/tclcompiler">https://github.com/ActiveState/teapot/tree/master/lib/tclcompiler</a>
109: tclcsv	2.3	<a href="https://sourceforge.net/projects/tclcsv/">https://sourceforge.net/projects/tclcsv/</a>
110: tclfpdf	1.5	<a href="https://github.com/lamuzzachiodi/tclfpdf">https://github.com/lamuzzachiodi/tclfpdf</a>
111: tclgd	1.4	<a href="https://github.com/flightaware/tcl.gd">https://github.com/flightaware/tcl.gd</a>
112: Tclkit		<a href="https://sourceforge.net/projects/kbskit/">https://sourceforge.net/projects/kbskit/</a>
113: tcllib	1.21	<a href="https://core.tcl-lang.org/tcllib">https://core.tcl-lang.org/tcllib</a>
114: TclMuPdf	2.1.1	<a href="https://sourceforge.net/projects/irrational-numbers/">https://sourceforge.net/projects/irrational-numbers/</a>
115: tclparser	1.8	<a href="https://github.com/flightaware/TclProDebug/tree/master/lib/tclparser">https://github.com/flightaware/TclProDebug/tree/master/lib/tclparser</a>
116: tclpy	0.4	<a href="https://github.com/aidanhs/libtclpy">https://github.com/aidanhs/libtclpy</a>
117: tclssg	2.2.1	<a href="https://github.com/tclssg/tclssg">https://github.com/tclssg/tclssg</a>
118: TclStubs	8.6.13	<a href="http://www.tcl-lang.org/">http://www.tcl-lang.org/</a>
119: TclTkManual		<a href="http://www.tcl-lang.org">http://www.tcl-lang.org</a>
120: tcltls	1.7.22	<a href="http://core.tcl-lang.org/tcltls/">http://core.tcl-lang.org/tcltls/</a>
121: tclvfs	1.4.2	<a href="https://sourceforge.net/projects/tclvfs/">https://sourceforge.net/projects/tclvfs/</a>
122: tclws	3.4.0	<a href="https://core.tcl-lang.org/tclws/">https://core.tcl-lang.org/tclws/</a>
123: tclx	8.4.4	<a href="https://github.com/flightaware/tclx/">https://github.com/flightaware/tclx/</a>
124: tdom	0.9.3	<a href="http://tdom.org/">http://tdom.org/</a>
125: TIFF	4.4.0	<a href="http://www.simplesystems.org/libtiff/">http://www.simplesystems.org/libtiff/</a>
126: tinyxml2	8.0.0	<a href="https://github.com/leethomason/tinyxml2">https://github.com/leethomason/tinyxml2</a>
127: Tix	8.4.3	<a href="http://tix.sourceforge.net/">http://tix.sourceforge.net/</a>
128: Tk	8.6.13	<a href="http://www.tcl-lang.org/">http://www.tcl-lang.org/</a>
129: tkchat	1.482	<a href="http://tkchat.tcl-lang.org/">http://tkchat.tcl-lang.org/</a>
130: tkcon	2.7.10	<a href="https://github.com/wjoye/tkcon/">https://github.com/wjoye/tkcon/</a>
131: tkdnd	2.9.3	<a href="https://github.com/petasis/tkdnd">https://github.com/petasis/tkdnd</a>
132: Tkhtml	3.0.1	<a href="http://tkhtml.tcl.tk/index.html">http://tkhtml.tcl.tk/index.html</a>
133: tklib	0.7	<a href="https://core.tcl-lang.org/tklib">https://core.tcl-lang.org/tklib</a>
134: tkpath	0.3.3	<a href="http://chiselapp.com/user/rene/repository/tkpath/">http://chiselapp.com/user/rene/repository/tkpath/</a>
135: tkribbon	1.1	<a href="https://github.com/petasis/tkribbon">https://github.com/petasis/tkribbon</a>
136: tksqlite	0.5.13	<a href="http://reddog.s35.xrea.com/wiki/TkSQLite.html">http://reddog.s35.xrea.com/wiki/TkSQLite.html</a>
137: TkStubs	8.6.13	<a href="http://www.tcl-lang.org/">http://www.tcl-lang.org/</a>
138: tksvg	0.12	<a href="https://github.com/oehhar/tksvg/">https://github.com/oehhar/tksvg/</a>
139: Tktable	2.11	<a href="http://tktable.sourceforge.net/">http://tktable.sourceforge.net/</a>
140: tkwintrack	2.0.1	<a href="https://sourceforge.net/projects/tkwintrack/">https://sourceforge.net/projects/tkwintrack/</a>
141: treectrl	2.4.1	<a href="https://sourceforge.net/projects/tktreectrl/">https://sourceforge.net/projects/tktreectrl/</a>
142: Trf	2.1.4	<a href="http://tcltrf.sourceforge.net/">http://tcltrf.sourceforge.net/</a>
143: trofs	0.4.9	<a href="https://math.nist.gov/~DPorter/tcltk/trofs/">https://math.nist.gov/~DPorter/tcltk/trofs/</a>
144: tserialport	1.1	<a href="https://tcl.sowaswie.de/repos/fossil/tserialport/home">https://tcl.sowaswie.de/repos/fossil/tserialport/home</a>
145: twapi	4.7.2	<a href="https://twapi.magicsplat.com/">https://twapi.magicsplat.com/</a>
146: tzint	1.1	<a href="https://tcl.sowaswie.de/repos/fossil/tzint/home">https://tcl.sowaswie.de/repos/fossil/tzint/home</a>
147: udp	1.0.11	<a href="https://sourceforge.net/projects/tcludp/">https://sourceforge.net/projects/tcludp/</a>
148: ukaz	2.0a3	<a href="https://github.com/auriocus/ukaz">https://github.com/auriocus/ukaz</a>
149: vectcl	0.2	<a href="http://auriocus.github.io/VecTcl/">http://auriocus.github.io/VecTcl/</a>
150: Vim	9.0.0	<a href="https://www.vim.org/">https://www.vim.org/</a>
151: wcb	3.8	<a href="http://www.nemethi.de/">http://www.nemethi.de/</a>
152: windetect	1.0.0	<a href="https://sourceforge.net/projects/tkwintrack/">https://sourceforge.net/projects/tkwintrack/</a>
153: winhelp	1.1	<a href="https://www.androwish.org/index.html/dir?name=undroid/winhelp">https://www.androwish.org/index.html/dir?name=undroid/winhelp</a>
154: Xerces	3.2.4	<a href="http://xerces.apache.org/">http://xerces.apache.org/</a>
155: xz	5.2.7	<a href="https://sourceforge.net/projects/lzmautils/">https://sourceforge.net/projects/lzmautils/</a>
156: yasm	1.3.0	<a href="https://yasm.tortall.net/">https://yasm.tortall.net/</a>
157: ZLib	1.2.13	<a href="http://www.zlib.net/">http://www.zlib.net/</a>

## 9 MSYS / MinGW Information

This chapter describes the development environments `MSYS` and `MinGW`. These packages provide an environment using the GNU compiler collection (`gcc`) to build typical Open Source projects like **Tcl/Tk** under Windows.

### 9.1 Introduction

#### 9.1.1 MSYS

Short description from the homepage of MSYS: <http://www.mingw.org/>

*MSYS, a contraction of "Minimal SYStem", is a Bourne Shell command line interpreter system. Offered as an alternative to Microsoft's `cmd.exe`, this provides a general purpose command line environment, which is particularly suited to use with MinGW, for porting of many Open Source applications to the MS-Windows platform.*

MSYS is a collection of Unix tools for Windows. It contains all tools which are needed for the typical build process using the `configure / make` toolset.

Examples: `autogen`, `cp`, `rm`, `mv`, `mkdir`, `m4`, `make`

MSYS is available as 32-bit version only. This version can be used in conjunction with both the 32-bit and 64-bit version of `MinGW`.

#### 9.1.2 MSYS2

MSYS2 is a newer version of MSYS. It is available from <https://www.msys2.org/>.

Download the newest 32-bit installer and execute it. After installation perform the following commands to update the packages and add additional packages needed for BAWT.

- Start the MSYS2 shell and execute command:

```
> pacman -Syu
```

- Close the MSYS2 shell by closing the window.
- Start the MSYS2 shell again and perform the following commands:

```
> pacman -Su
> pacman -S make
> pacman -S autoconf
> pacman -S pkg-config
```

#### 9.1.3 MinGW

Short description from the homepage of MinGW-w64: <http://sourceforge.net/projects/mingw-w64/>

*MinGW, a contraction of "Minimalist GNU for Windows", is a minimalist development environment for native Microsoft Windows applications.*

*MinGW provides a complete Open Source programming tool set which is suitable for the development of native MS-Windows applications, and which do not depend on any 3rd-party C-Runtime DLLs. (It does depend on a number of DLLs provided by Microsoft themselves, as components of the operating system; most notable among these is MSVCRT.DLL, the Microsoft C runtime library. Additionally, threaded applications must ship with a freely distributable thread support DLL, provided as part of MinGW itself).*

*MinGW compilers provide access to the functionality of the Microsoft C runtime and some language-specific runtimes. MinGW, being Minimalist, does not, and never will, attempt to provide a POSIX runtime environment for POSIX application deployment on MS-Windows.*

MinGW provides the GNU Compiler Collection `gcc` for Windows. The SourceForge project `MinGW-w64` supplies 32-bit and 64-bit versions of `gcc`.

The `MinGW-w64` project also supplies an extended version of `MSYS` (see chapter [9.2 Installation](#) below for details).

## 9.2 Installation

### 9.2.1 Download MSYS

Entry page:

<http://sourceforge.net/projects/mingwbuilds/files/external-binary-packages/>

File: `msys+7za+wget+svn+git+mercurial+cvs-rev13.7z`

Link:

<http://sourceforge.net/projects/mingwbuilds/files/external-binary-packages/msys%2B7za%2Bwget%2Bsvn%2Bgit%2Bmercurial%2Bcvs-rev13.7z/download>

### 9.2.2 Download MinGW

Entry page for 32-bit version:

<http://sourceforge.net/projects/mingw-w64/files/Toolchains%20targetting%20Win32/Personal%20Builds/mingw-builds/>

Entry page for 64-bit version:

<http://sourceforge.net/projects/mingw-w64/files/Toolchains%20targetting%20Win64/Personal%20Builds/mingw-builds/>

#### **32-bit gcc 4.9.2**

File: `i686-4.9.2-release-posix-dwarf-rt_v4-rev4.7z`

Link:

[http://sourceforge.net/projects/mingw-w64/files/Toolchains%20targetting%20Win32/Personal%20Builds/mingw-builds/4.9.2/threads-posix/dwarf/i686-4.9.2-release-posix-dwarf-rt\\_v4-rev4.7z/download](http://sourceforge.net/projects/mingw-w64/files/Toolchains%20targetting%20Win32/Personal%20Builds/mingw-builds/4.9.2/threads-posix/dwarf/i686-4.9.2-release-posix-dwarf-rt_v4-rev4.7z/download)

#### **32-bit gcc 5.2.0**

File: `i686-5.2.0-release-posix-dwarf-rt_v4-rev0.7z`

Link:

[http://sourceforge.net/projects/mingw-w64/files/Toolchains%20targetting%20Win32/Personal%20Builds/mingw-builds/5.2.0/threads-posix/dwarf/i686-5.2.0-release-posix-dwarf-rt\\_v4-rev0.7z/download](http://sourceforge.net/projects/mingw-w64/files/Toolchains%20targetting%20Win32/Personal%20Builds/mingw-builds/5.2.0/threads-posix/dwarf/i686-5.2.0-release-posix-dwarf-rt_v4-rev0.7z/download)

### **32-bit gcc 7.2.0**

File: *i686-7.2.0-release-posix-dwarf-rt\_v5-rev1.7z*

Link:

[https://sourceforge.net/projects/mingw-w64/files/Toolchains%20targetting%20Win32/Personal%20Builds/mingw-builds/7.2.0/threads-posix/dwarf/i686-7.2.0-release-posix-dwarf-rt\\_v5-rev1.7z/download](https://sourceforge.net/projects/mingw-w64/files/Toolchains%20targetting%20Win32/Personal%20Builds/mingw-builds/7.2.0/threads-posix/dwarf/i686-7.2.0-release-posix-dwarf-rt_v5-rev1.7z/download)

### **32-bit gcc 8.1.0**

File: *i686-8.1.0-release-posix-dwarf-rt\_v6-rev0.7z*

Link:

[https://sourceforge.net/projects/mingw-w64/files/Toolchains%20targetting%20Win32/Personal%20Builds/mingw-builds/8.1.0/threads-posix/dwarf/i686-8.1.0-release-posix-dwarf-rt\\_v6-rev0.7z/download](https://sourceforge.net/projects/mingw-w64/files/Toolchains%20targetting%20Win32/Personal%20Builds/mingw-builds/8.1.0/threads-posix/dwarf/i686-8.1.0-release-posix-dwarf-rt_v6-rev0.7z/download)

### **64-bit gcc 4.9.2**

File: *x86\_64-4.9.2-release-posix-seh-rt\_v4-rev4.7z*

Link:

[http://sourceforge.net/projects/mingw-w64/files/Toolchains%20targetting%20Win64/Personal%20Builds/mingw-builds/4.9.2/threads-posix/seh/x86\\_64-4.9.2-release-posix-seh-rt\\_v4-rev4.7z/download](http://sourceforge.net/projects/mingw-w64/files/Toolchains%20targetting%20Win64/Personal%20Builds/mingw-builds/4.9.2/threads-posix/seh/x86_64-4.9.2-release-posix-seh-rt_v4-rev4.7z/download)

### **64-bit gcc 5.2.0**

File: *x86\_64-5.2.0-release-posix-seh-rt\_v4-rev0.7z*

Link:

[http://sourceforge.net/projects/mingw-w64/files/Toolchains%20targetting%20Win64/Personal%20Builds/mingw-builds/5.2.0/threads-posix/seh/x86\\_64-5.2.0-release-posix-seh-rt\\_v4-rev0.7z/download](http://sourceforge.net/projects/mingw-w64/files/Toolchains%20targetting%20Win64/Personal%20Builds/mingw-builds/5.2.0/threads-posix/seh/x86_64-5.2.0-release-posix-seh-rt_v4-rev0.7z/download)

### **64-bit gcc 7.2.0**

File: *x86\_64-7.2.0-release-posix-seh-rt\_v5-rev1.7z*

Link:

[https://sourceforge.net/projects/mingw-w64/files/Toolchains%20targetting%20Win64/Personal%20Builds/mingw-builds/7.2.0/threads-posix/seh/x86\\_64-7.2.0-release-posix-seh-rt\\_v5-rev1.7z/download](https://sourceforge.net/projects/mingw-w64/files/Toolchains%20targetting%20Win64/Personal%20Builds/mingw-builds/7.2.0/threads-posix/seh/x86_64-7.2.0-release-posix-seh-rt_v5-rev1.7z/download)

### **64-bit gcc 8.1.0**

File: *x86\_64-8.1.0-release-posix-seh-rt\_v6-rev0.7z*

Link:

[https://sourceforge.net/projects/mingw-w64/files/Toolchains%20targetting%20Win64/Personal%20Builds/mingw-builds/8.1.0/threads-posix/seh/x86\\_64-8.1.0-release-posix-seh-rt\\_v6-rev0.7z/download](https://sourceforge.net/projects/mingw-w64/files/Toolchains%20targetting%20Win64/Personal%20Builds/mingw-builds/8.1.0/threads-posix/seh/x86_64-8.1.0-release-posix-seh-rt_v6-rev0.7z/download)

### 9.2.3 Extract

The following instructions use the 32-bit version of gcc 4.9.2. Installation is done on drive C: Adapt file and directory names accordingly, when using other versions.

- Create directory `C:\MinGW-gcc4.9.2-32`
- Extract downloaded MinGW file in directory `C:\MinGW-gcc4.9.2-32`
- Extract downloaded MSYS file in directory `C:\MinGW-gcc4.9.2-32`

Your directory structure should now look as follows:

Name	Änderungsdatum	Typ
mingw32	06.11.2015 16:49	Dateiordner
msys	06.11.2015 17:00	Dateiordner

### 9.2.4 Configuration

Insert the next two lines into file `C:\MinGW-gcc4.9.2-32\msys\etc\fstab`

```
# Win32_Path          Mount_Point
C:/MinGW-gcc4.9.2-32/mingw32  /mingw
```

### 9.2.5 Test

Start the MSYS Shell by double-clicking onto file `C:\MinGW-gcc4.9.2-32\msys\msys.bat`  
You may create a shortcut of `msys.bat` on your desktop for easier access.

## 9.3 Further Informations

Source: <http://sourceforge.net/p/mingw-w64/wiki2/MSYS/>

### 9.3.1 What is MSYS

MSYS is a Minimal SYStem, providing several crucial unix utilities under a compatibility layer (the `msys-1.0.dll` file). MSYS should provide everything to make compilation of common GNU software. An outdated [description](#) by the makers themselves.

#### **MSYS provided by the mingw-w64/w32 project**

This package is not more than a collection of the 50+ packages provided by `mingw.org`. It was created as a (huge) convenience to our users, to let them be productive instead of downloading every part separately. The accompanying sources are also provided and can be found in the same download section as mentioned above.

This package is 32-bit, but will run flawlessly on x64 Windows. There will never be a 64-bit native MSYS (is there any need?) because the only compiler capable of building MSYS applications is the outdated `gcc 3.4.4`, which does not support x64 native Windows targets.

### 9.3.2 Where to get MSYS

There are three places you can get MSYS:

- The [MinGW project](#), with separate packages of all official MSYS packages. Takes a long time to download and install everything.
- The all-in-one package on the [MinGW-w64 download page](#). It is updated on request (see third option for very up to date collection)
- [MinGW-builds](#) provides an ultra-inclusive MSYS package with a bunch of additional useful stuff.

### 9.3.3 How to use MSYS

Installing MSYS is quite easy.

- You'll need to download the above package.
- Unzip it somewhere, for example C:\msys so that C:\msys\bin contains (among others) bash.exe.
- Doubleclick (or make a handy shortcut and run that) on C:\msys\msys.bat.
- Type sh /postinstall/pi.sh
- Answer the friendly questions and you're all set up.

#### **Mingw-w64/w32 specifics**

When running an autotools configure script, these options will come in handy:

- for a 64-bit build: `--host=x86_64-w64-mingw32`
- for a 32-bit build: `--host=i686-w64-mingw32`

If you are experiencing problems, you can also set `--build` to the same value. Some configure scripts also use `--target` instead of `--host`. Use `configure --help` to get all possible options.

#### ***--host, --target, and --build explained***

`--host` specifies on what platform/architecture the compiled program is going to run. `--target` specifies the platform/architecture that the program should be configured for and will be compiled for. This should only have effect when building cross-compilers. `--build` specifies the platform/architecture the build process is going to be executed.

## 10 Release history

The following table gives an overview of the release history of **BAWT**. For detailed release information see the [BAWT homepage](#).

Version	Date	Release notes
0.1.0	2016-06-24	First version introduced at EuroTcl 2016 in Eindhoven.
0.2.0	2016-08-27	Improved build actions. New and updated libraries.
0.3.0	2016-10-23	Improved build actions. New and updated libraries.
0.4.0	2016-12-28	Improved build actions. New and updated libraries.
0.5.0	2017-03-19	Improved build actions. New and updated libraries.
0.6.0	2017-07-20	Improved build actions. New and updated libraries.
0.7.0	2017-08-26	Improved build actions. New and updated libraries.
0.7.1	2017-09-12	Support for Tcl/Tk 8.7.
0.7.2	2017-09-24	Support for Visual Studio 2017.
0.7.3	2018-01-04	Tcl/Tk 8.6.8. New and updated libraries.
0.8.0	2018-07-04	Support for nested Setup files. New and updated libraries.
0.9.0	2018-12-28	Tcl/Tk 8.6.9. New and updated libraries.
0.9.1	2019-03-09	Better support for Debug build mode. New and updated libraries.
1.0.0	2019-06-23	Several incompatible changes. Support for Visual Studio 2019.
1.1.0	2019-12-28	Tcl/Tk 8.6.10. Improved MinGW support for several libraries. New and updated libraries.
1.1.1	2020-01-12	Improved handling of C++ based Tcl extensions.
1.1.2	2020-02-16	Improved BawtLogViewer. New and updated libraries.
1.1.3	2020-03-15	Improved Linux build. Updated libraries.
1.1.4	2020-05-02	Improved MinGW support for several libraries. New and updated libraries.
1.2.0	2020-06-09	Additional MSYS2 support. New and updated libraries.
1.2.1	2020-09-05	Support for Tcl/Tk 8.7a4. New and updated libraries.
1.3.0	2021-01-08	Support for Tcl/Tk 8.6.11. Improved support for Tcl/Tk 8.7.a4. New and updated libraries.
2.0.0	2021-08-22	Support for primary and secondary compiler on Windows. Tcl/Tk 8.7.a5. New and updated libraries.
2.1.0	2021-12-28	Support for Tcl/Tk 8.6.12. New and updated libraries.
2.2.0	2022-04-15	Support for MinGW gcc 11. New and updated libraries.
2.2.1	2022-07-17	Maintenance release. New and updated libraries.
2.3.0	2022-12-18	Support for Tcl/Tk 8.6.13 and Apple Silicon (ARM). New and updated libraries.
2.3.1	2023-01-19	Maintenance release. New and updated libraries.